



300 PSI CWP Iron Body Gate Valves


Fire protection valve • outside screw and yoke • resilient wedge • epoxy coated interior/exterior • pre-grooved stem for supervisory switch • drilled, tapped and plugged at boss location A**

300 PSI/20.6 bar non-shock cold working pressure

UL/ULC LISTED† • FM APPROVED • CERTIFIED LEAD-FREE* BY TRUESDAIL LABORATORIES TO NSF/ANSI 61 & 372



F-607-RWS
Flanged

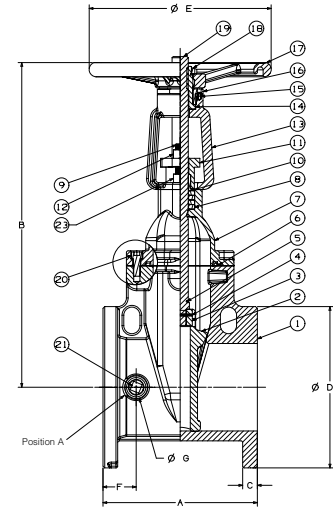

F-607-RWS
Flg x Flg

MATERIAL LIST		
PART	SPECIFICATION	
1	Valve Body	Ductile Iron ASTM A536
2	Resilient Wedge	Ductile Iron ASTM A536/EPDM ASTM D2000
3	Wedge Nut	ASTM B584 UNS C83600
4	Dowel Pin	ASTM A276 SS304
5	Stem Back Seat O-Ring	EPDM ASTM D2000
6	Bonnet Gasket	EPDM ASTM D2000
7	Bonnet	Ductile Iron ASTM A536
8	Stem Packing	EPDM ASTM D2000
9	Threaded Rod	ASTM A276 SS304
10	Gland Bushing	ASTM B584 UNS C83600
11	Gland	Ductile Iron ASTM A536
12	Gland Nut	ASTM B148 C95200 Aluminum Bronze
13	Yoke	Ductile Iron ASTM A536
14	Yoke Bushing	ASTM B150 C61400
15	Flat Point Set Screw	ASTM F912M
16	Yoke Bushing Retainer	Cast Iron ASTM A126 Class B
17	Handwheel	Ductile Iron ASTM A536
18	Handwheel Nut	Carbon Steel Zinc Plated
19	Stem	Stainless Steel 304
20	Bonnet Screw	Corrosion-resistant Steel
21	NPT Pipe Plug	Steel ASME B16.14
22	UL/FM Label (not shown)	Aluminium
23	Yoke Nut	ASTM B148 C95200 Aluminum Bronze
24	Drive Screw Label (not shown)	Stainless Steel 304

Coating — Electrostatically applied fusion-bonded epoxy 8-20 mil. inside and outside. Meets or exceeds AWWA C550. Epoxy coating is not intended to serve as a dielectric barrier internal to the piping system

**Drilled, tapped and plugged at Position A with 1/2" valve sizes 2 1/2"-4", 3/4" on 6"-8", 1" on 10"-12".

† Compliance with the Standard for Gate Valves for Fire Protection Service, UL 262, and the Canadian Requirements, ULC/ORD-C262.

NOTE: Flanged valve is consistent with ANSI B16.1 Class 125.

DIMENSIONS—WEIGHTS—QUANTITIES

Size	Dimensions																Bolt Circle	Flange Holes	Turns To Open	Weight			
	A	B Open	B Closed	C	D	E	F	G	In.	mm.	In.	mm.	In.	mm.	In.	mm.				In.	mm.	Lbs.	Kg.
2 1/2"	65	7.5	190	17.8	453	14.9	378	0.69	17.5	7.0	178	7.9	200	1.50	38	1.42	36	5.50	140	4	6.3	39	18
3"	80	8.0	203	19.7	500	15.9	405	0.75	19.0	7.5	191	7.9	200	1.73	44	1.42	36	6.00	152	4	10.0	44	20
4"	100	9.0	229	21.0	534	16.6	422	0.94	24.0	9.0	229	10.2	260	2.13	54	1.42	36	7.50	191	8	10.0	72	33
6"	150	10.5	267	29.3	744	22.9	581	1.00	25.4	11.0	279	12.4	315	2.24	57	1.54	39	9.50	241	8	15.0	117	53
8"	200	11.5	292	37.0	939	28.5	724	1.13	28.6	13.5	343	14.8	375	2.48	63	1.54	39	11.75	298	8	16.7	198	90
10"	250	13.0	330	44.8	1139	34.5	877	1.19	30.2	16.0	406	16.4	416	3.15	80	1.82	46	14.25	362	12	20.8	374	170
12"	300	14.0	356	52.2	1326	39.9	1014	1.25	31.8	19.0	483	17.5	445	2.91	74	1.82	46	17.00	432	12	25.0	493	224
14*	350	15.0	375	62.2	1580	50.0	1270	1.38	35.0	21.0	533	19.7	500	2.95	75	3.20	81	18.75	476	12	43.8	620	284
16*	400	16.0	400	65.9	1674	50.4	1280	1.44	37.0	23.5	597	19.7	500	3.03	77	3.20	81	21.25	540	16	50.0	816	370

*14 and 16" valves 250 PSI CWP

*Weighted average lead content ≤ 0.25%

VISIT WWW.NIBCO.COM FOR CURRENT CHEM-GUIDE AND GALVANIC POTENTIAL IN PIPING SYSTEMS INFORMATION.

Visit our website for the most current information.

FREEZING WEATHER PRECAUTION: Subsequent to testing a piping system, valves should be left in an open position to allow complete drainage.