


PRODUCT SPECIFICATION DRAWING

HOLDRITE® FLOOR MOUNTED WATER HEATER EQUIPMENT SUPPORT

#20-FMWH-1, -1A (20" - 26" Dia. Tanks) and #20-FMWH-2 (26" - 32" Dia. Tanks)

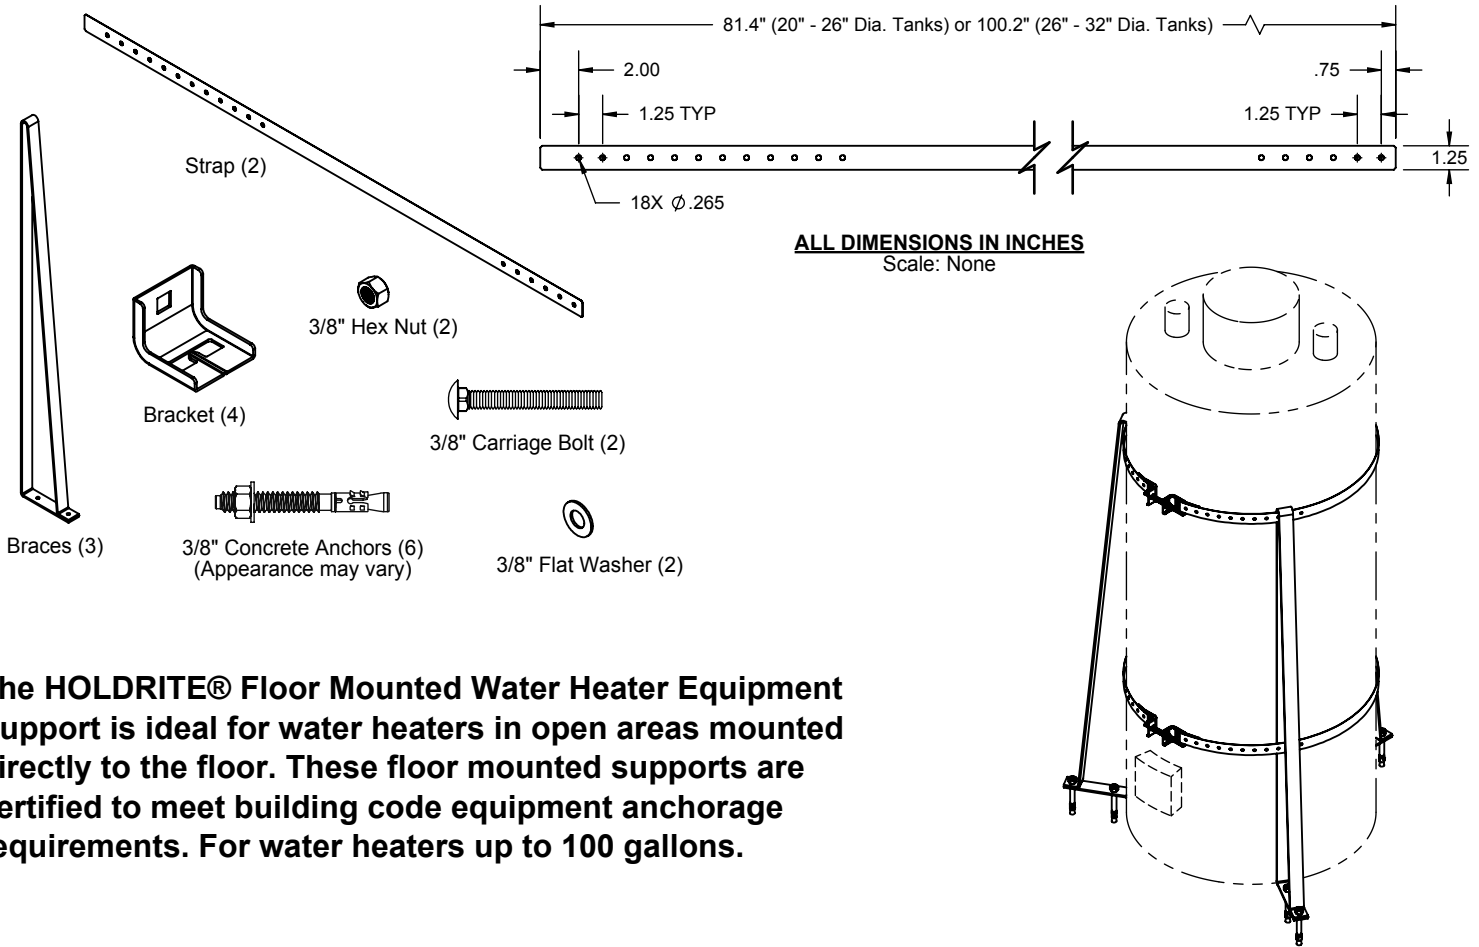

The **HOLDRITE® Floor Mounted Water Heater Equipment Support** is ideal for water heaters in open areas mounted directly to the floor. These floor mounted supports are certified to meet building code equipment anchorage requirements. For water heaters up to 100 gallons.

Product Information:

- Material:
 Braces: 3/16" Hot Rolled Steel, per ASTM-A36
 Strap: 28GA Galvanized Cold Rolled Steel
 Bracket: 16GA Cold Rolled Steel, Clear Zinc Finish
 Hardware: Galvanized or Zinc Plated Steel
- Includes concrete anchors (6) for slab mounting.
- May be mounted to wood surface floors with applicable hardware (not included).
- Registered Engineer Confirmation and Documentation available.

Model #	Tank Dia.	Gallons	Slab Thickness
20-FMWH-1	20" - 26"	75 Max	4-1/2" Min
20-FMWH-1A	20" - 26"	60 Max	4" Min
20-FMWH-2	26" - 32"	100 Max	4-1/2" Min

Anchorage of Non Structural Components Such as Water Heaters:
 Non-structural components weighing greater than 400 pounds, subject to a few specific exemptions, require permanent anchorage. Therefore, water heaters 40 gallons or larger will typically require anchorage. Also, in some jurisdictions, Code requires that even smaller units must be anchored. Check with your local jurisdiction with regards to equipment anchorage, or refer to ASCE 7-10 Chapter 13; 2013 CBC Sections 1613 and 1616A; and 2012 IBC Section 1613.

THIS INFORMATION IS PROPRIETARY TO HOLDRITE AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IT MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION.

Product Submittal	
Job Name:	
Date:	
Part Number:	Qty:
Architect / Owner:	
Contractor:	
Notes:	

