

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.



MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347  
SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961  
(502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

visit our web site:  
[zoellerengprod.com](http://zoellerengprod.com)



## PUMP STATION VALVES, FITTINGS AND ALUMINUM HATCHES AND COVERS



### 1-1/4" - 3" NPT CAST IRON CHECK VALVES

**#30-0163**

**1-1/4" CAST IRON NPT**

**#30-0152**

**2" CAST IRON NPT**

**#30-0164**

**1-1/2" CAST IRON NPT**

**#30-0160**

**3" CAST IRON NPT**



30-0163  
Pictured

Outside dimensions  
4-15/16" w x 4" x 6-3/16" h

- Vertical or horizontal installation
- Full flow design - no restrictions
- Stops back flow of water
- Neoprene polyester reinforced flapper - smooth edge design, with cast iron and noncorrosive metal backing plates & stainless steel fastener
- Rated at 50 PSI (115 feet of head) at 130 °F (54 °C)
- Stainless steel bolts
- Suitable for installation below basin cover



6030-0160  
Pictured

Outside dimensions  
6-5/8" w x 6-5/8" w x 8" h

### 1-1/4" - 3" PVC BALL VALVES



30-0167  
Pictured

- General purpose ball valve
- Ideal for a variety of applications

**#30-0175**

**1-1/4" SLIP TO SLIP W/ UNION - 150 PSI RATED**

**#30-0165**

**1-1/4" SLIP TO SLIP - 150 PSI RATED**

**#30-0166**

**1-1/2" SLIP TO SLIP - 150 PSI RATED**

**#30-0167**

**2" SLIP TO SLIP - 150 PSI RATED**

**#30-0221**

**3" SLIP TO SLIP - 150 PSI RATED**

### 1-1/4" & 2" BRASS/BRONZE CHECK VALVES



30-0223  
Pictured

**#30-0223 1-1/4" NPT BRASS**

**#30-0225 2" NPT BRONZE**


- 200 PSI WOG rated
- Metal to metal seals
- Vertical or horizontal installation
- Stops back flow of water
- Suitable for installation below basin cover

### 1-1/4" & 2" BRASS BALL VALVES

**#30-0213 1-1/4" NPT BRASS**

**#30-0226 2" NPT BRASS**

- 600 PSI WOG rated
- Full port
- Quarter-turn operation

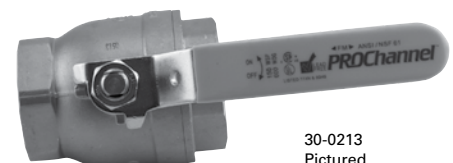

30-0213  
Pictured