




**SPECIFICATIONS**  
**INLINE**  
**EXHAUST FANS**

	<b>IL4: 130 CFM @ 0.2" SP.,</b>	<b>110 @ 0.4" SP.,</b>	<b>87 @ 0.6" SP., 38.5 Watts</b>
	<b>IL6: 240 CFM @ 0.2" SP.,</b>	<b>202 @ 0.4" SP.,</b>	<b>169 @ 0.6" SP., 84.7 Watts</b>
	<b>IL8: 470 CFM @ 0.2" SP.,</b>	<b>436 @ 0.4" SP.,</b>	<b>395 @ 0.6" SP., 127.0 Watts</b>
	<b>IL10: 560 CFM @ 0.2" SP.,</b>	<b>514 @ 0.4" SP.,</b>	<b>465 @ 0.6" SP., 142.0 Watts</b>
	<b>IL12: 700 CFM @ 0.2" SP.,</b>	<b>579 @ 0.4" SP.,</b>	<b>426 @ 0.6" SP., 205.0 Watts</b>

- Motor**  
 Enclosed 2 pole, life time lubrication, ball bearing motor. Suitable for continuous operation. Maximum air temperature 140° F. Suitable for use with fan speed controller. 115 Volts, 60Hz.
- Blower Wheel**  
 Backward inclined, balanced polymeric single inlet blower wheel.  
  
**Model IL12:** Backward inclined, balanced metal single inlet blower wheel.
- Electrical Connections**  
**Power Unit:** 1/2" electrical knockouts provided with internal terminal block.
- Unit Mounting**  
**Power Unit:** Metal fan mounting bracket included with the unit.

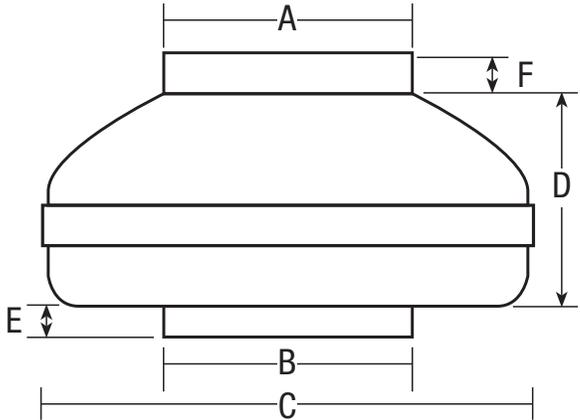

Model	A	B	C	D	E	F
IL4	3 7/8"	3 7/8"	9 1/2"	7"	1 1/8"	5/8"
IL6	5 7/8"	5 7/8"	10 5/8"	6 1/4"	1"	3/4"
IL8	7 7/8"	7 7/8"	13 1/2"	7"	1"	1 1/8"
IL10	9 3/4"	9 3/4"	13 1/2"	6 7/8"	1"	1 1/8"
IL12	11 7/8"	11 7/8"	15 3/4"	12 3/8"	1 1/8"	1 1/8"

<b>EXPANDED PERFORMANCE</b>													
<i>Air Flow - CFM</i>	<i>Static Pressure (inches of w.g.)</i>									<i>Fan Speed RPM</i>	<i>ENERGY STAR</i>	<i>Power Watts</i>	<i>Amps</i>
	0	0.1	0.125	0.2	0.25	0.3	0.375	0.4	0.6				
<b>IL4</b>	151	141	138	130	125	120	112	110	87	2919	No	38.5	0.4
<b>IL6</b>	270	257	253	240	231	222	208	202	169	2647	No	84.7	0.7
<b>IL8</b>	498	484	481	470	462	454	441	436	395	3096	No	127	1.3
<b>IL10</b>	600	581	576	560	549	538	520	514	465	3050	No	142	1.5
<b>IL12</b>	771	748	740	700	685	657	607	579	426	2443	No	205	2.0

Please note: The Home Ventilation Institute (HVI) does not currently have a sound test standard for remote mounted fans. As a result sound levels (sones) are not listed. In most cases, a remote fan will be quieter than one mounted within the living area.

<b>PROJECT</b>							<b>ARCHITECT</b>						
<b>LOCATION</b>							<b>ENGINEER</b>						
<b>CONTRACTOR</b>							<b>SUBMITTED BY</b>					<b>DATE</b>	
FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS				



**U.S.:** 820 Lincoln Avenue  
 West Chester, Pennsylvania 19380-4466  
 Tel: (610) 692-7400 • 877-304-3785  
 Fax: (610) 696-8048

**Canada:**  
 Brampton, Ontario  
 Tel: 800-250-8767  
 Fax: (905) 456-1015