

INSTALLATION INSTRUCTIONS

Item#3336-84 (New. 3/31/2021)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig. 1 & Fig. 4)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove old fixture, including mounting hardware.
2. Carefully remove the fixture from the carton and check that all parts are included as shown in the illustration.
3. Adjust arms to proper position equal distance apart. (Fig.4)
4. Attach fixture loop (A) all thread (B).
5. Thread long all thread (G) to bottom of the fixture body. Slide cap (H) over long all thread (G) and secure with finial (I).

HANGING THE FIXTURE (Fig. 2)

6. Thread the all thread into ceiling loop until snug.
7. Thread the other end of the all thread into the crossbar. Note: The length of the all thread into the crossbar may be adjusted, if necessary.
8. Secure the all thread to the crossbar using the lock washer and hex nut.
9. Take this crossbar assembly and mount it to the ceiling outlet box with mounting screws (Size: #8-32N*L0.5"). The side of crossbar marked with "GND" must face out.
10. Determine the desired hanging height and use a pair of proper chain pliers to remove and discard the excess chain.
11. Open one link at the end of chain and attach it to fixture loop. Close the link. Slip lock collar and canopy over chain and allow them to rest on the fixture body. Open the link at the other end of the chain and attach it to ceiling loop. Close the link.
12. Carefully lace the fixture's wires through the chain. Feed the fixture wires through the loop and all thread assembly.

CONNECTING THE WIRE (Fig. 3)

13. Connect the electrical wires as shown in figure 3, making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture ground wire directly to the crossbar using the green screw provided.
14. Tuck these wire connections neatly into the outlet box. Slide canopy over the ceiling loop and secure with lock collar.

FINISHING THE FIXTURE (Fig.1)


15. Place candle covers (D) over sockets (E).
16. Install (6) six candelabra base bulbs (C) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

Set# A-010
-Crossbar
-Ground screw
-Mounting screw*2

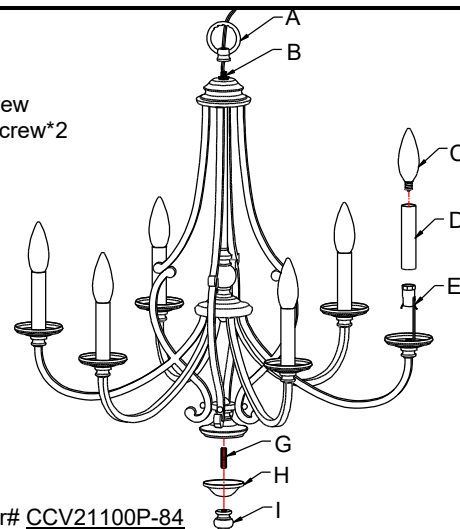

Candle cover# CCV21100P-84

Fig. 2

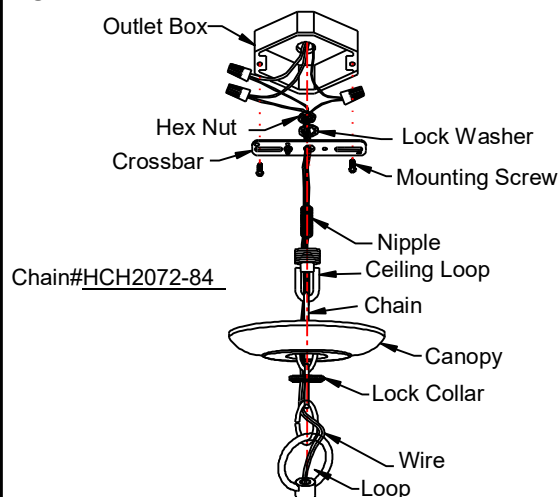


Fig. 3


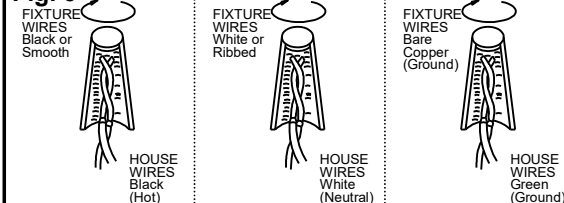


Fig. 4



Notice: It is important to use proper chain pliers (not included) To OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.



LA-3348E