


INJECTION MOLDED BELL/BELL COUPLER

| PART # | PIPE SIZE | A | B | C | JOINT |
|--------|------------------------------|--------------------|---------------------|---------------------|-------|
| 0413WT | 4 × 4 in (100 × 100 mm) | 2.3 in (59 mm) | 4.7 in (119 mm) | 5.6 in (141 mm) | WT |
| 0613WT | 6 × 6 in (150 × 150 mm) | 3.5 in (88 mm) | 6.9 in (176 mm) | 7.9 in (201 mm) | WT |
| 0813WT | 8 × 8 in (200 × 200 mm) | 4.3 in (108 mm) | 8.6 in (217 mm) | 10.4 in (263 mm) | WT |
| 1013WT | 10 × 10 in (250 × 250 mm) | 5.5 in (140 mm) | 11.0 in (279 mm) | 12.9 in (326 mm) | WT |

NOTE:

FITTINGS WHOSE PART NUMBERS END WITH "WT" HAVE WATER TIGHT BELL CONNECTIONS. WATER TIGHT BELLS ARE SHOWN HERE IN THIS DRAWING AND REQUIRE GASKETS TO BE FITTED TO DUAL WALL PIPE TO FORM A WATER TIGHT JOINT. (GASKETS INCLUDED)

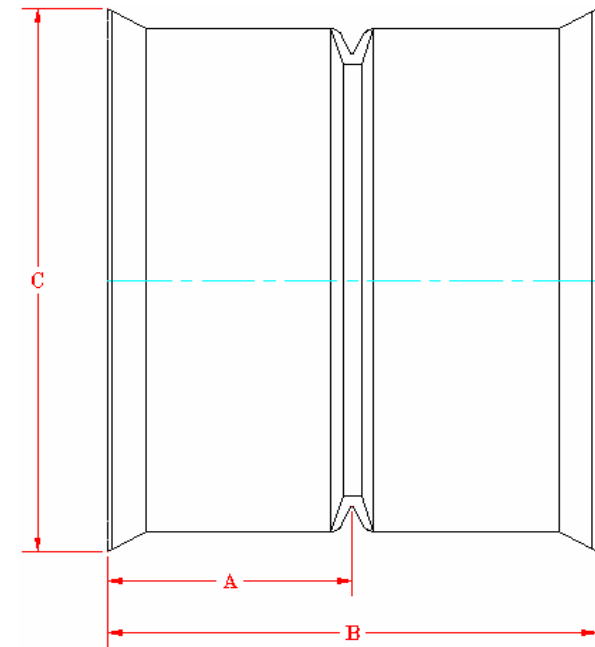

NOTE: ALL FITTINGS DIMENSIONS ARE FOR REFERENCE ONLY



| | | |
|--------------|------|----------|
| DRAWING #: | 3600 | |
| DRAWN BY: | JCB | 03.28.07 |
| APPROVED BY: | | |
| REVISIONS: | TJR | 10.17.07 |
| | | |
| | | |