

4U SERIES - LED

Select Appropriate Light Fixture, Color Temperature, Size and Finish

2700K – WARM WHITE

4U27K08 BZT, WHT ♦

- 8" L x 4.5" W x 1.1" H
- 175 Lumens
- 4 Watts

4U27K12 BZT, WHT ♦

- 12" L x 4.5" W x 1.1" H
- 250 Lumens
- 5 Watts

4U27K22 BZT, WHT ♦

- 22" L x 4.5" W x 1.1" H
- 485 Lumens
- 10 Watts

4U27K30 BZT, WHT ♦

- 30" L x 4.5" W x 1.1" H
- 650 Lumens
- 14 Watts

♦ Available April 2016.

3000K – PURE WHITE

4U30K08 BZT, WHT ♦

- 8" L x 4.5" W x 1.1" H
- 200 Lumens
- 4 Watts

4U30K12 BZT, WHT ♦

- 12" L x 4.5" W x 1.1" H
- 285 Lumens
- 5 Watts

4U30K22 BZT, WHT ♦

- 22" L x 4.5" W x 1.1" H
- 560 Lumens
- 10 Watts

4U30K30 BZT, WHT ♦

- 30" L x 4.5" W x 1.1" H
- 750 Lumens
- 14 Watts

Under Cabinet Accessories (optional)

10571 BK, WH

- 9" Interconnect cable

10572 BK, WH

- 14" Interconnect cable

10573 BK, WH

- 21" Interconnect cable

10570 BK, WH

- Wire module
- 7-3/4" L x 2-5/8" W x 1" H

10588 SI


- Duplex BX cable connector

10589 SI (included with fixture)

- Connector for NM & BX cable

6UCORD BK, WH

- 60" under-cabinet interconnect prong cord



Standard Wall Dimmer Selection Tips:

Pairing fixtures with a standard wall dimmer can help increase the versatility of the light. It's helpful to know that dimmers consume some of the power into the fixture, and some dimmers perform better than others, so a slight decrease in the initial lumen output (overall brightness) can be expected.


Dimmer switch type*	What to expect
Standard triac	Will reduce initial lumen output from 94% to 76%
Rotary	Will dim 100% to black
Electric low voltage	Will create a smaller dim range, typically from 80% to 62%

* Kichler has tested this LED fixture against a variety of popular and readily available dimmer switches. Visit Kichler.com for installation video and a recommended dimmer list.

BACK OF CABINET DESIGN – DIRECT WIRE CONNECT



FRONT MOUNT – USE WIRE MODULE AND INTERCONNECT CABLE

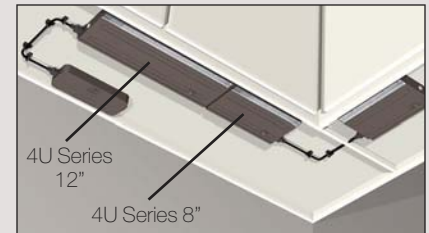

PRODUCT BENEFITS:

- Quality, diffused light output
- 90 CRI, energy efficient, LED light source
- Durable powder coat finish
- Dimmable with standard wall dimmer
- 3-year residential warranty

INSTALLATION BENEFITS:

- Captive screws for quick installation
- Direct wire and linkable
- 1" profile, 4 1/2" depth