

PFSH308G SHOWER HEAD



Product Features

- Metal ball joint & ABS construction
- 1/2" connection
- Single function showerhead
- Easy-clean nozzles
- Max. flow rate 1.75 gpm (6.6 L/min) at 80 psi




Codes and Certifications



PFSH308GCP

- Certified to ASME A112.18.1 / CSA B125.1
- cUPC/IAPMO listed
- EPA WaterSense certified

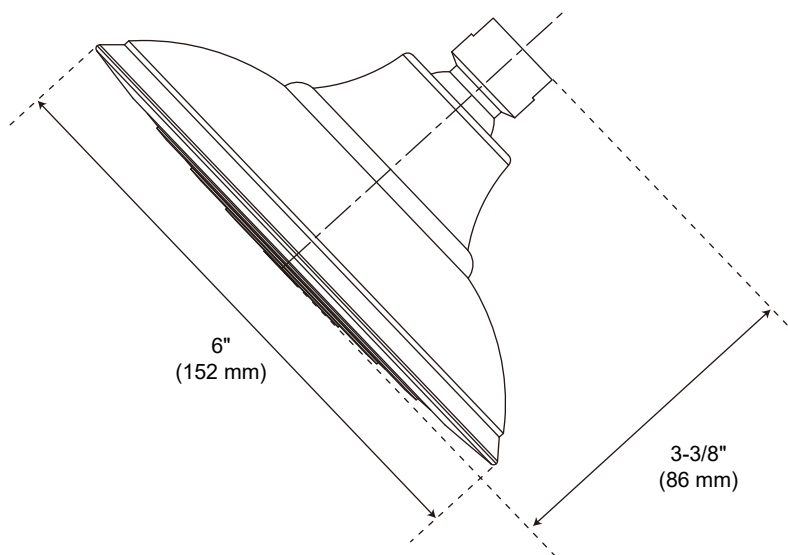

For detailed warranty information, visit [ferguson.com/proflo-faucet-warranty](https://www.ferguson.com/proflo-faucet-warranty).