



Location:

SYMMONS® Origins®

the smart choice™

9605-PLR, 9605-PLR-TRM, 9605PLRTRMTC
 Shower/Hand Shower Trim
Specification Submittal



Feature Highlights

- Origins Shower/Hand Shower System or Trim
- Requires Temptrol® Pressure Balancing Shower Valve (included with 9605-PLR)
- Requires Symmons Dual Outlet Diverter Valve (included with 9605-PLR)
- Adjustable stop screw to limit handle turn (included with 9605-PLR)
- Metal lever handles
- ADA 36" grab bar for hand shower wand
- Dual checks for backflow protection
- 60" flexible metal hose
- ADA 1 mode hand shower wand with non-positive shutoff
- 1 mode showerhead with easy to clean nozzles
- 2.5 gpm (9.5 L/min) flow restrictors
- Tub spout not included
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9605PLRTRMTC)
- For optional in-line vacuum breaker order p/n EF-109

Model Numbers

- 9605-PLR**
Shower/Hand Shower Trim with Temptrol Pressure Balancing Shower Valve and Symmons Dual Outlet Diverter Valve
- 9605-PLR-TRM**
Shower/Hand Shower Trim, Temptrol Pressure Balancing Shower Valve and Symmons Dual Outlet Diverter valve ordered separately
- 9605PLRTRMTC**
Shower/Hand Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap

Compliance

- ASME A112.18.1/CSA B125.1
- Buy American Act (9605-PLR only)
- WaterSense @ 1.5 gpm and 2.0 gpm (does not apply to L3 modification)



Warranty


Limited Lifetime - to the original end purchaser in consumer/residential installations.
5 Years - for industrial/commercial installations.
 Refer to www.symmons.com/warranty for complete warranty information.
 Go to www.symmons.com/register to register your Symmons product.

Options/Modifications

- 1.5** **CG** 1.5 gpm (5.7 L/min) flow restrictor
- 2.0** 2.0 gpm (7.6 L/min) flow restrictor
- 72** 72" hose in place of 60" hose
- B** Brass escutcheon (chrome only)
- CHKS** Integral check stops - for use in installations where a positive shut-off device is used downstream of mixing valve
- L1** Less showerhead
- L2** Less hand shower wand
- L3** Less showerhead & hand shower wand
- L4** Less showerhead, shower arm & flange
- L5** Less hand shower system (less bar/cradle, hose, wand & elbow)
- L7** Less handle
- NS** **CG** Non-shared diverter valve
- R** 60" white vinyl hose in place of 60" metal hose
- VP** Vandal resistant escutcheon screws in place of standard screws
- X** Integral service stops - allows water shut off at valve for service
- STN** Satin Nickel finish

Note: Append appropriate -suffix to model number.

Dimensions

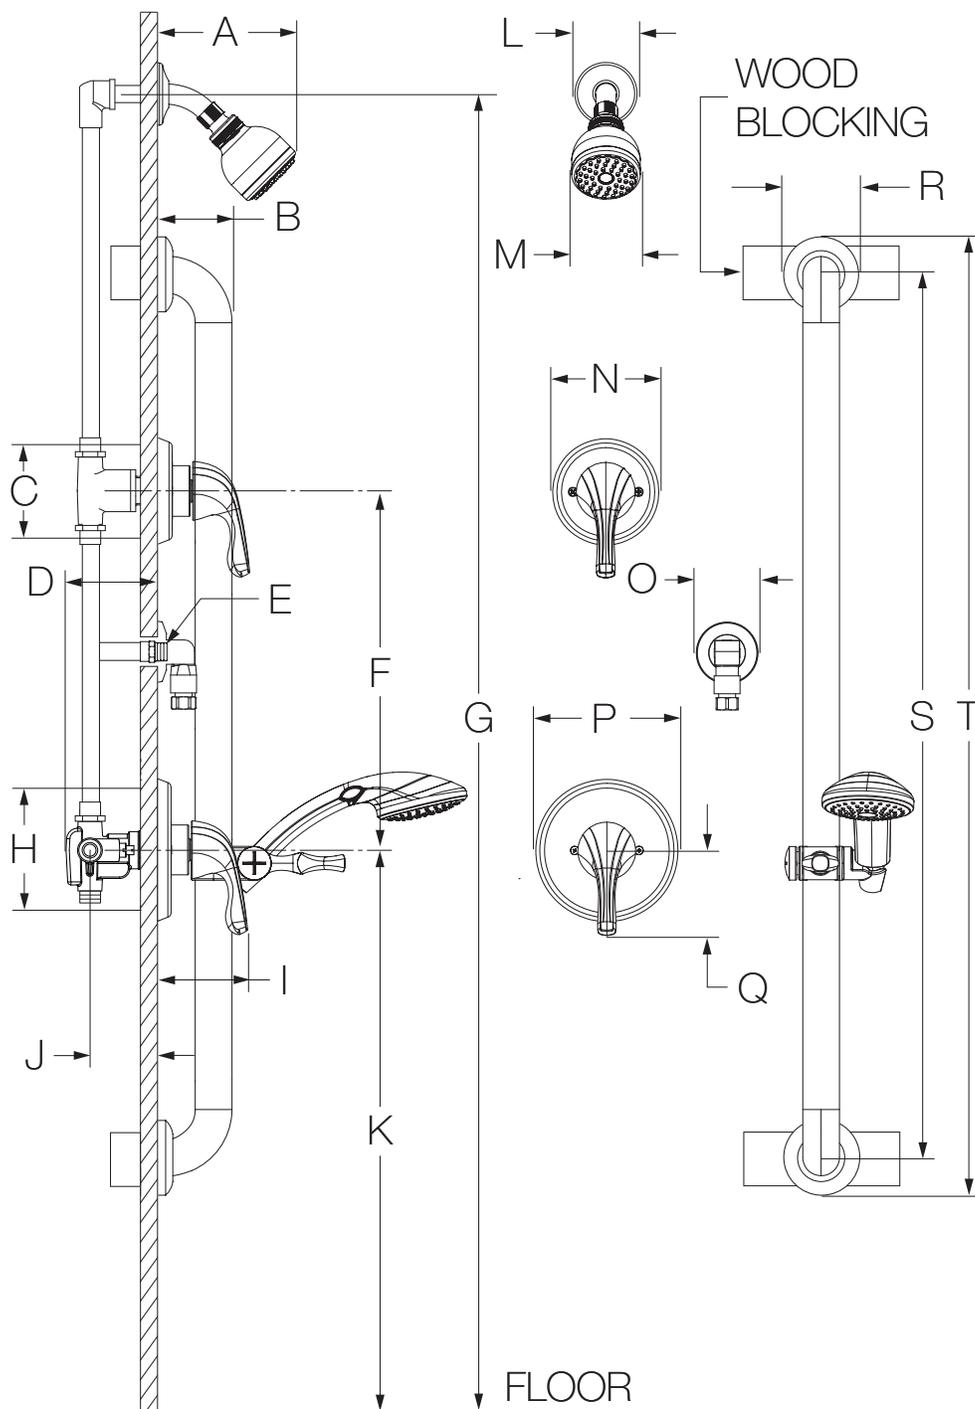

| Measurements | |
|--------------|--|
| A | 6-3/8", 162 mm |
| B | 3", 76 mm |
| C | Diverter Valve Hole Size Min. Ø 3", 76 mm Max. Ø 3-1/4", 83 mm |
| D | 3-1/2", 89 mm |
| E | Male 1/2" NPT fitting must protrude 3/8" from finished wall |
| F | Ref. 10", 254 mm |
| G | Ref. 77", 1956 mm |
| H | Shower Valve Hole Size Min. Ø 3", 76 mm Max. Ø 4", 102 mm |
| I | 3-5/8", 92 mm |
| J | Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm |
| K | Ref. 42", 1067 mm |
| L | Ø 2-1/2", 64 mm |
| M | Ø 2-3/4", 70 mm |
| N | Ø 4-1/4", 108 mm |
| O | Ø 2-1/2", 64 mm |
| P | Ø 5-3/4", 146 mm |
| Q | 3-3/8", 86 mm |
| R | Ø 3-1/8", 79 mm |
| S | 36", 914 mm |
| T | 39", 991 mm |

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see J as reference).
- 4) Dimensions subject to change without notice.