

PF1825PTWH

High Efficiency Urinal Wash-out, Rear Outlet



Product Features

- Vitreous china
- High efficiency urinal (HEU)
- Wash-out flushing: 0.125 gpf/ 0.47 lpf (one pint) to 1.0 gpf / 3.8 lpf
- 3/4" top inlet spud
- 2" NPT inside thread outlet
- Elongated 14" rim
- Hanging bracket included
- Flush valve not included



PF1825PTWH

Codes and Standards

- ADA
- IAPMO/UPC
- ASME A112.19.2
- CSA
- Watersense: WaterSense compliant when used with a 0.125 gpf or 0.5 gpf WaterSense-compliant flushometer

Included Components

- Mounting brackets
- Inlet spud
- Outlet spud

Specified Model

Model	Model Description	Color Finishes
PF1825PTWH	Washout, 3/4" T/S Rear Outlet	○ White

Technical Information

Fixture:	
Configuration	wash-out urinal, rear outlet
Water per flush	0.125gpf-1.0 gpf / 0.47lpf-3.8lpf
Spud size	3/4" top
Passageway	2" outlet



PF1825PTWH


High Efficiency Urinal Wash-out, Rear Outlet



Product Specification:

Wash-out urinal shall be made of vitreous china with a 3/4" top spud. Urinal shall include inlet and spuds and brackets.

Urinal shall use 0.125 gpf - 1.0 gpf (0.47 lpf - 3.8 lpf). Urinal shall be PROFLO model PF1825PTWH. Recommended working pressure between 25 and 80 psi. Provide suitable reinforcement for wall support.

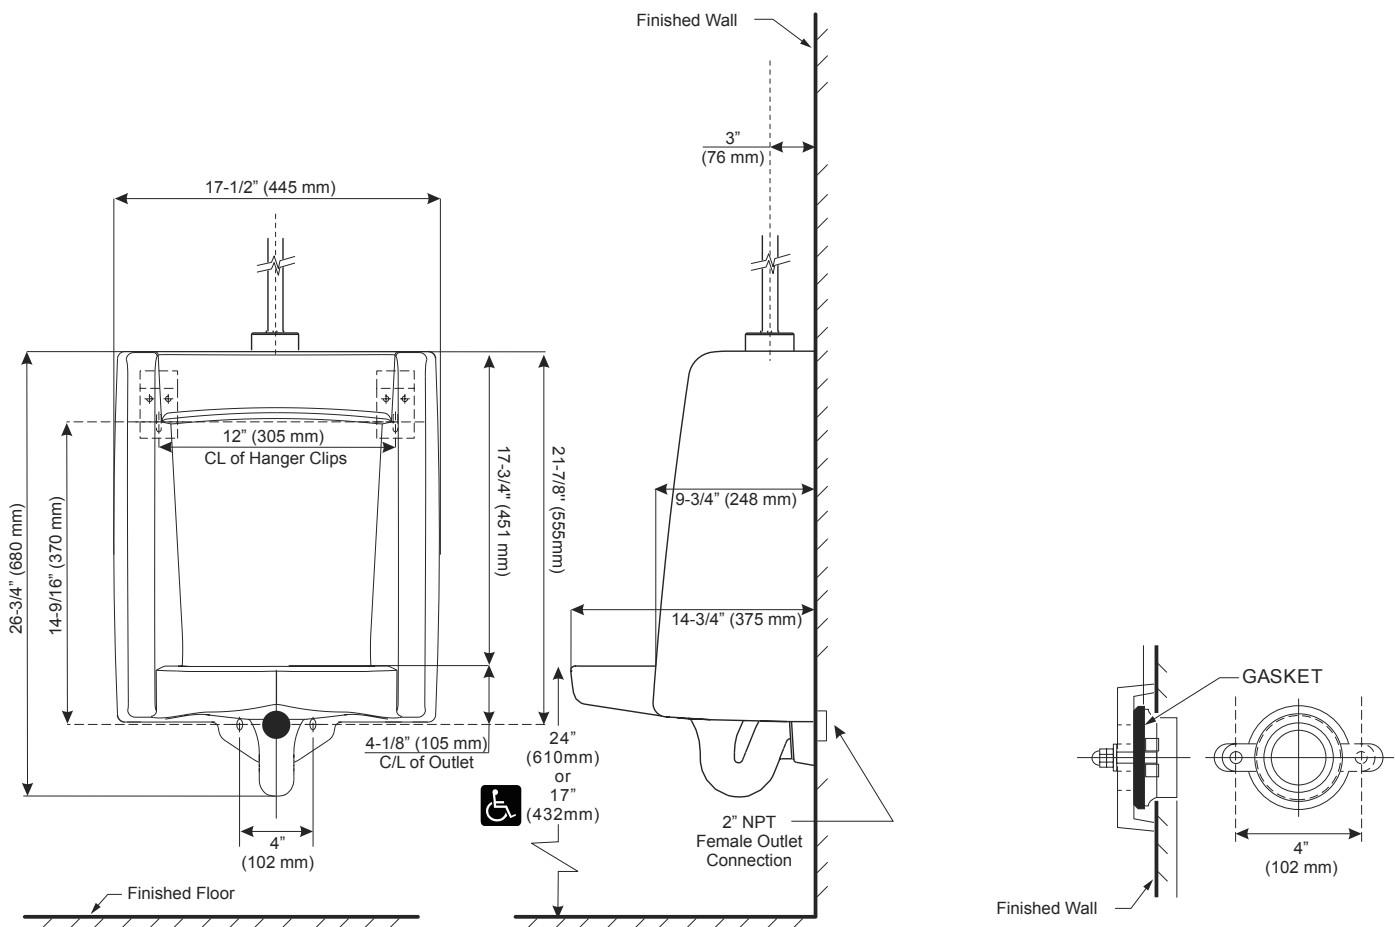

Warranty and Codes

This product comes complete with installation, operating, care and maintenance instructions. All PROFLO fixtures carry a 1- year limited warranty. This product meets or exceeds ASME/ ANSI A112.19.2M. In an effort to continually improve our products, we will make design changes from time to time. We reserve the right to ship newly designed product to fill any order unless we agree in writing to do otherwise. Meets the Americans Disabilities Act guidelines and ANSI A11.17.1 when installed to 17" height from finished floor.

