

# PE2EU SERIES

## LED Emergency Light

### Specifications:

#### Description:

The PE2EU Series offers quality and value with a compact and attractive LED based emergency light. The white housing and lamp-heads are fully adjustable and glare-free. Snap together design for quick and easy installation with option of Wall or Ceiling mount. Remote capacity unit will run a double-head remote or 2 single-head remotes of the PERHC Series.

#### Features:

- LED life-cycle of more than 10 years
- Quick Installation
- Dual-voltage 120 or 277V AC input
- Includes long-life Nickel Cadmium battery for UL recognized 90 minute emergency lighting
- Remote capacity or extended runtime option
- Damp Location Listed
- Fully adjustable lamp-heads
- Provided with test switch and AC-On indicator
- Wall or Ceiling mount
- 3 VDC
- 1 Watt

#### Application:

The PE2EU Series can be applied in stairwells, hallways, offices and other commercial applications.

#### Energy Consumption:

	120 VAC	277 VAC
PE2EU-30	0.56W	1W
PE2EU-30-RC	0.92W	1.62W

#### Accessories:

- PERHC – SG – ID – 30
- PERHC – DB – ID – 30
- PERHC – SG – OD – 30
- PERHC – DB – OD – 30



SG-ID



SG-OD



DB-ID




DB-OD

#### Images:



#### Dimensions:

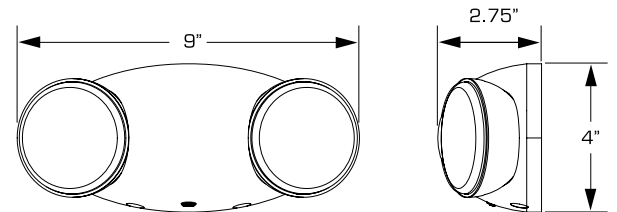

#### Warranty:

2 year full unit warranty

#### Compliances:

- UL924 Listed for Damp Location
- NFPA 101 and NFPA 70
- OSHA

#### Catalog number:

Base	Material	Input	Finish	Remote Capacity
PE2EU	Thermoplastic	120/277	30 - White	RC - Remote Capacity