


TWO-HANDLE WIDESPREAD LAVATORY FAUCET
WITH RIGID/SWIVEL GOOSENECK SPOUT WITH 8" REACH AND FLEXIBLE UNDERBODY



6540.278 Shown

MODEL NUMBER:

- ❑ **6540.277 Widespread Lavatory**
Flexible underbody for installation on 6" - 12" centers. 0.5 gpm Pressure compensating multi-laminar spray. Field-convertible rigid/swivel gooseneck spout with 8" reach. Vandal-resistant wrist blade handles. Less drain and pop-up hole.
- ❑ **6540.278 Widespread Lavatory**
Flexible underbody for installation on 6" - 12" centers. 1.5 gpm Pressure compensating aerator. Field-convertible rigid/swivel gooseneck spout with 8" reach. Vandal-resistant wrist blade handles. Less drain and pop-up hole.

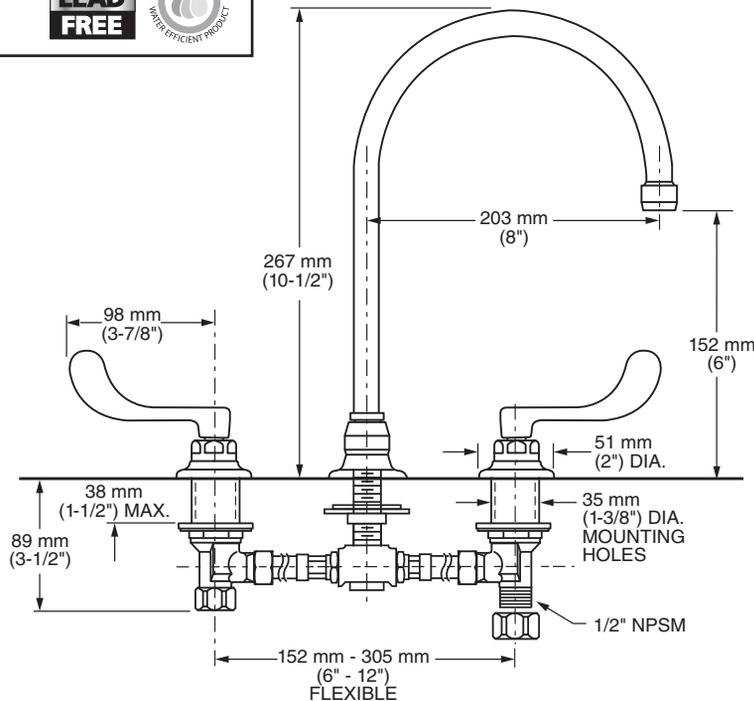

GENERAL DESCRIPTION:

Durable cast brass construction. Cast brass valve bodies with flexible underbody for installation on 6" - 12" centers. 1/2" male threaded inlet shanks with brass coupling nuts. 1/4 turn ceramic disc valve cartridges. Field-convertible rigid/swivel gooseneck spout with 8" reach. Vandal-Resistant Wrist Blade handles with blue & red color indexes.

PRODUCT FEATURES:

Pressure Compensating Aerator: Provides a constant water flow throughout the pressure range.

Solid Brass Construction: Durable. Excellent in high use applications. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridges: Assure a lifetime of drip-free performance.

Field-Convertible Rigid/Swivel Spout with 8" Reach: Easily converted in the field.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.

SUGGESTED SPECIFICATION

Two handle widespread lavatory faucet shall feature cast brass valve bodies with flexible underbody compression fittings for installation on 6" - 12" centers. Shall feature water-conserving pressure compensating flow outlets. Vandal-Resistant wrist blade handles. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature convertible rigid/swivel spout with 8" reach. Fitting shall be American Standard Model # 6540.27_.002.




MONTERREY®

**TWO-HANDLE WIDESPREAD LAVATORY FAUCET
WITH RIGID/SWIVEL GOOSENECK SPOUT WITH 8" REACH AND FLEXIBLE UNDERBODY**

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ASME A112.18.1**
- CSA B125.1**
- NSF 372**

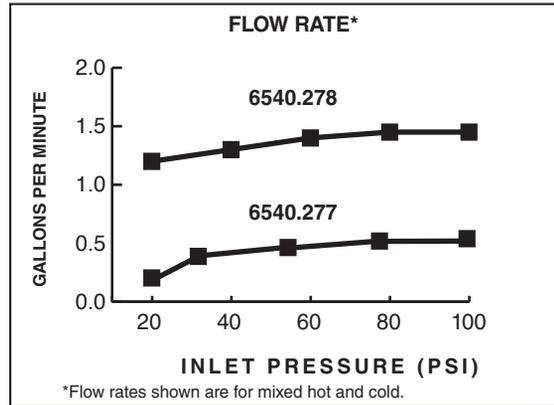

Product Number	Description	Finish
		Polished Chrome
		002
6540.277	Widespread lavatory faucet with field-convertible gooseneck spout with 8" reach. Flexible underbody for installation on 6" - 12" centers. 0.5 gpm/1.9 L/min pressure compensating multi-laminar spray. Vandal-resistant wrist blade handles. Less drain & pop-up hole.	
6540.278	Widespread lavatory faucet with field-convertible gooseneck spout with 8" reach. Flexible underbody for installation on 6" - 12" centers. 1.5 gpm/5.7 L/min pressure compensating aerator. Vandal-resistant wrist blade handles. Grid strainer drain.	



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES

Other Aerators Available:

Part Suffix	Description
LV15	1.5 gpm (5.7 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet
V15	1.5 gpm (5.7 Lpm) Vandal-Resistant PCA Aerator
LV10	1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet
V10	1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Aerator
V035*	0.35 gpm (1.3 Lpm) Vandal-Resistant PCA Multi-Laminar Spray

PCA - Pressure Compensating

*Meet CALGreen Code