


**COLONY® PRO
DECK MOUNT TUB FILLER**

Thank you for selecting American Standard...
the benchmark of fine quality for over 100 years.

To ensure that your installation proceeds smoothly-please
read these instructions carefully before you begin.

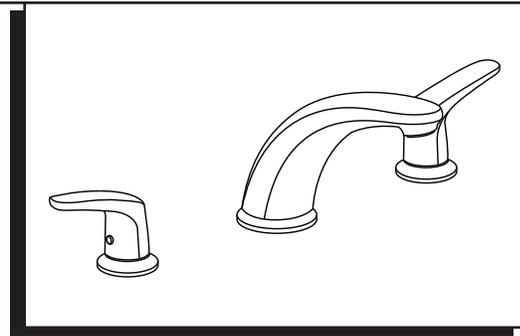

Certified to comply with ANSI A112.18.1M
U.S. Patent No. D403,750

RECOMMENDED TOOLS



Flat Blade Screwdriver



*Hex Key



Adjustable Wrench





Channel Locks

*Supplied with Fittings

1 SPOUT INSTALLATION


CAUTION Turn off hot and cold water
supplies before beginning.

- Complete FINISHED DECK (A) before trim installation.
- Turn off the water supplies.
- Remove the GUARDS (1) from the VALVE BODIES (2). Remove the SPOUT GUARD (3) and 1/4" PLUG (4) from the SPOUT SHANK (5).
- The SPOUT SHANK (6) height should be 1" to 2" above the FINISHE DECK (A). Cut the SPOUT SHANK (5) if necessary. Remove all burrs and bevel the end of the shank. Failure to do so may damage the SPOUT O-ring during installation and cause water leakage.
- Lubricate the SPOUT O-RING (6).
- Remove the PLUG BUTTON (7) from the SPOUT (8).
- Position the RUBBER RING (9) in the GROOVE (B) in the base of the SPOUT (8). Push the SPOUT (8) down onto the SPOUT SHANK (5) in the FINISHED DECK (A).
- Tighten the SET SCREW (10) securely with the 5mm HEX KEY (11).
- Insert the PLUG BUTTON (7) into the SPOUT (8).

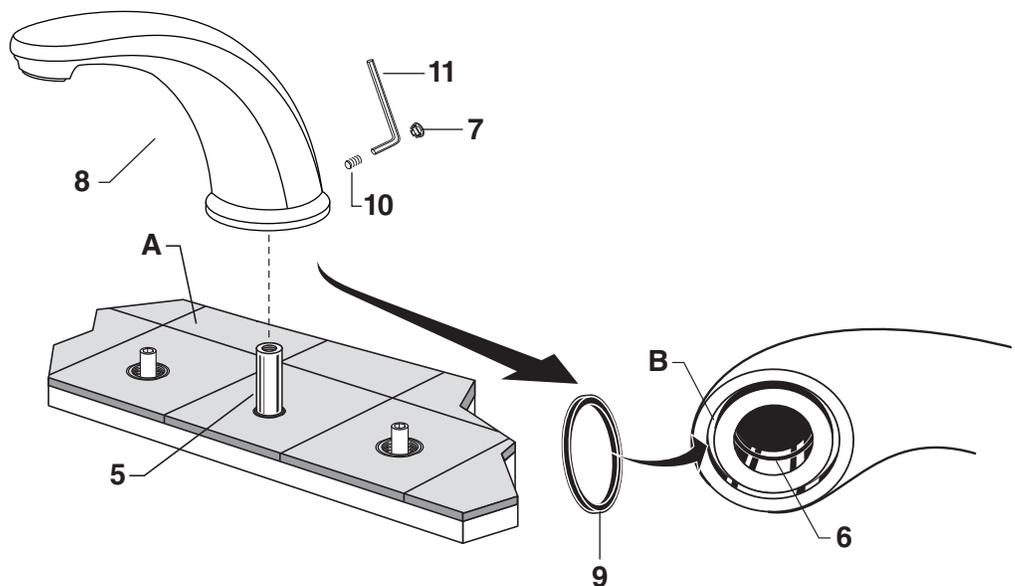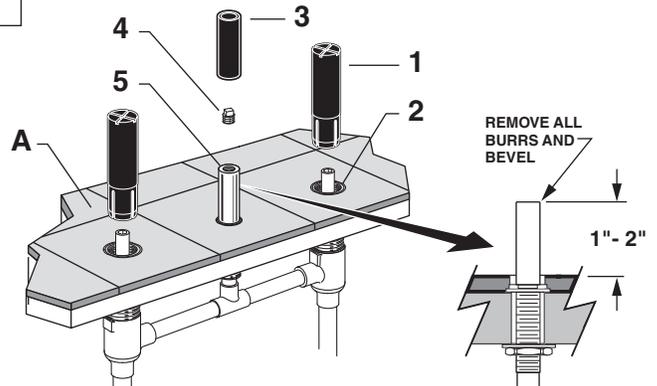


2 INSTALL VALVE TRIM

- Fit ESCUTCHEON SEALS (1) into underside of VALVE ESCUTCHEONS (2).
- Thread the VALVE ESCUTCHEONS (2) into the VALVE BODIES (3). Align the HANDLE STEM (4) with the SLEEVE (5) as necessary. Thread the VALVE ESCUTCHEON (2) into the BODIES (3) until the ESCUTCHEON (2) contacts the finished deck.

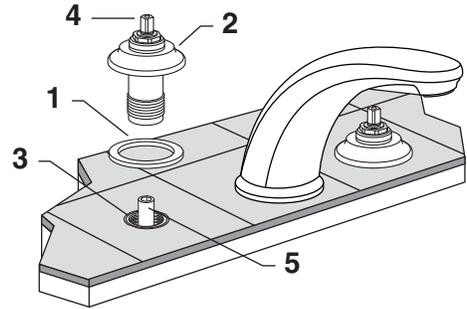


3 INSTALL HANDLE TRIM

- Turn HANDLE STEM (1) to "OFF" position.
- Place the HANDLE ADAPTER (2) on the HANDLE STEM (1).
- Position LEVER HANDLE (4) and place on ADAPTER (2). Install the HANDLE SCREW (5) and tighten securely.

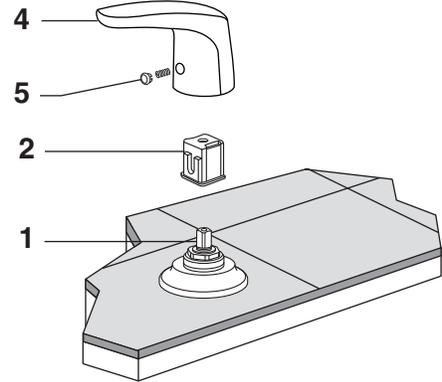


4 TEST INSTALLED FAUCET

- Remove STREAM STRAIGHTENER (1). With handles in OFF position, turn on water supplies and check all connections for leaks.
- Operate both handles to flush water lines thoroughly. Replace STREAM STRAIGHTENER (1).

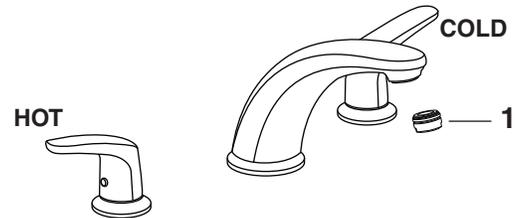

American Standard

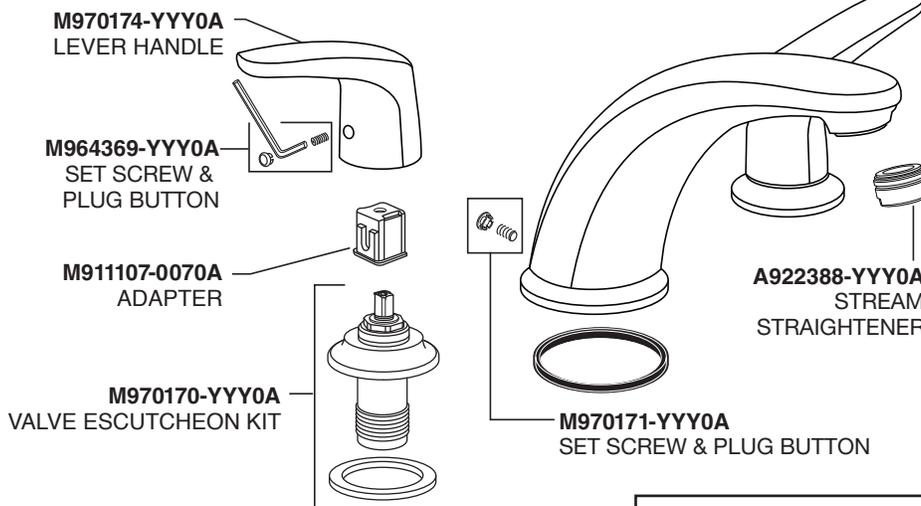

COLONY® PRO DECK MOUNT TUB FILLER

MODEL NUMBER

T075.900

Replace the "YYY" with
appropriate finish code

POLISHED CHROME	002
LEGACY BRONZE	278
SATIN NICKEL	295

HOT LINE FOR HELP

For toll-free information and answers to your questions, call: 1 (800) 442-1902
Mon. - Fri. 8:00 a.m. to 8:00 p.m. EST
Saturday 10:00 a.m. to 4:00 p.m. EST

IN CANADA 1-800-387-0369
(TORONTO 1-905-306-1093)
Weekdays 8:00 a.m. to 7:00 p.m. EST
IN MEXICO 01-800-839-1200



PART OF LIXIL