



INSTALLATION, OPERATION & MAINTENANCE INSTRUCTIONS

1455 Kleppe Lane ♦ Sparks, NV 89431-6467 ♦ (775) 359-4712 ♦ Fax (775) 359-7424
E-mail: haws@hawsco.com ♦ website: www.hawsco.com

No. 0510000490(3)

Model 1920/1920HPS/1920W Bottle Filler

NOTE TO INSTALLER: Please leave this information with the Maintenance Department.

LIMITED WARRANTY

HAWS warrants that this specific product is guaranteed against defective material or poor workmanship for a period of **one year from date of shipment**. HAWS liability under this warranty shall be discharged by furnishing without charge F.O.B. HAWS Factory any goods, or part thereof, which shall appear to the Company upon inspection to be of defective material or not of first class workmanship, provided that claim is made in writing to Haws within a reasonable period after receipt of the product. Where claims for defects are made, the defective part or parts shall be delivered to the Company, prepaid, for inspection. HAWS will not be liable for the cost of repairs, alterations or replacements, or for any expense connected therewith made by the owner or his agents, except upon written authority from HAWS, Sparks, Nevada. HAWS will not be liable for any damages caused by defective materials or poor workmanship, except for replacements, as provided above. Buyer agrees that HAWS shall not be liable for general, special, or consequential damages claimed to arise under the contract of sale. The drinking fountain manufactured by HAWS is warranted to function if installation and maintenance instructions provided are adhered to. The units also must be used for the purpose for which they were intended.

**NO OTHER WARRANTIES EXPRESSED OR IMPLIED ARE AUTHORIZED,
PROVIDED OR GIVEN BY HAWS.**

**SHOULD YOU EXPERIENCE DIFFICULTY WITH THE INSTALLATION OF THIS
MODEL PLEASE CALL:**

TECHNICAL SUPPORT: 1-800-766-5612

FOR CUSTOMER SERVICE: 1-888-640-4297

REQUIRED TOOLS: Tubing cutter, 3/32" and 5/32" hex key set, adjustable wrench or socket.

LOCATION OF UNIT: The Model 1920/1920HPS/1920W bottle filler water dispenser can be installed in various applications. Possible installations include indoor over an existing drinking fountain, outdoor over an existing fountain, or a standalone wall-mounted bottle filler. When installing this unit, local, state or federal codes should be adhered to.

SUPPLY LINE: The minimum recommended line size is 3/8"O.D. copper or plastic tubing with 30-90 psi (2-6 ATM) pressure. Where sediment or mineral content is a problem, an inlet filter is recommended.

PLUMBING CONNECTIONS: Inlet is 3/8"O.D. push-in type fitting.

MAINTENANCE: Periodically clean the strainer. Refer to 5874 Series Valve Manual for more information.

INSTALLATION PROCEDURE

GENERAL NOTES:

1. For all plastic push-in type fitting connections, only connect NSF-61 copper or plastic tubing. Stainless steel or glass tubing is not recommended. The following assembly instructions must be followed to ensure a watertight connection:
 - a. Cut tubing square and clean.
 - b. Mark from end of tube the length of insertion (See table below).
 - c. Push tube into the fitting until it bottoms out.
 - d. To remove, depress collet and pull tubing out.

Tube Sizes	O.D. Tolerance	Insertion Depth
1/4"	±.005"	11/16"
3/8"	±.005"	3/4"
1/2"	±.005"	7/8"

CLEANING INSTRUCTIONS FOR HI-POLISHED STAINLESS PRODUCTS:

Haws' recommended cleaning procedure for hi-polished stainless products is as follows: Use a mild detergent or soap and water for removing stains and fingerprints or use a clean cloth with window cleaner.

BOTTLER FILLER BRACKET:

If installing the bottler filler in new construction, use Model 6700 or 6700.4L Mounting Plate. Follow the installation instructions supplied with the 6700 or 6700.4L for mounting dimensions. Reference Page 5-9 of this document for 1920/1920HPS/1920W button heights when mounted over different Haws drinking fountains.

If installing as a retrofit in old construction, it is recommended to use Model 6700 or 6700.4 Mounting Plate behind the finished wall. If that is not possible, it is recommended to install wood stud cross-braces behind the wall and mount the 1920/1920HPS/1920W directly to the wood support. If that is not possible, Model 6700R Retrofit Plate may be used. Follow the installation instructions supplied with the 6700R.


If installing as a standalone bottle filler, use the mounting hole location diagram on Page 5 and bolt the 1920/1920HPS/1920W securely to the wall.

TROUBLESHOOTING	
PROBLEM	REPAIR CHECKLIST
1. Insufficient water flow.	1a. Check that any inlet screwdriver stop valve (not supplied) is wide open. Turn counterclockwise. b. Verify minimum 30 psi flowing supply pressure. c. Clean strainer. See 5874 Series Valve Manual. d. Adjust valve to increase flow. Use front adjust screw or see 5874 Series Valve Manual. e. Make sure nozzle is free of debris.
2. Excessive water flow.	2a. Adjust valve to decrease flow. Use front adjust screw or see 5874 Series Valve Manual.
3. Water flow is crooked or splatters.	3a. Make sure nozzle is free of debris. b. Verify that bottle filler is installed level and straight. c. Adjust valve to decrease flow. Use front adjust screw or see 5874 Series Valve Manual.



For more information about Haws products, see our website: www.hawsc.com

ITEM	DESCRIPTION	PART NO.
1	VALVE REPAIR KIT HF	VRK5874HF
2	PUSH BUTTON ASSY	PBA6



PARTS BREAKDOWN

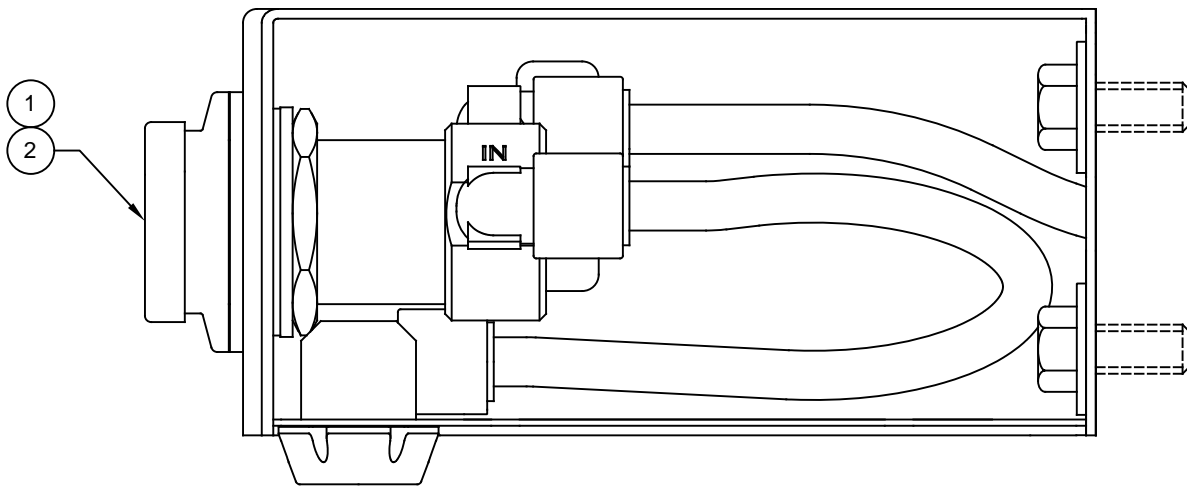

		Haws [®]		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM			
				ECN NO. 5081 DRAWN MJ APPROVED FV	REVISED PER ECN: 5188 DATE 06/08/16 DATE 07/06/17	BY JP CHKD VWC	MODEL(S) 1920/1920HPS/1920W
WHEN ORDERING PARTS PLEASE SPECIFY MODEL NUMBER.				SCALE: 1:14	DRAWING TYPE: PARTS BREAKDOWN	SIZE: A	SHEET 1 OF 1

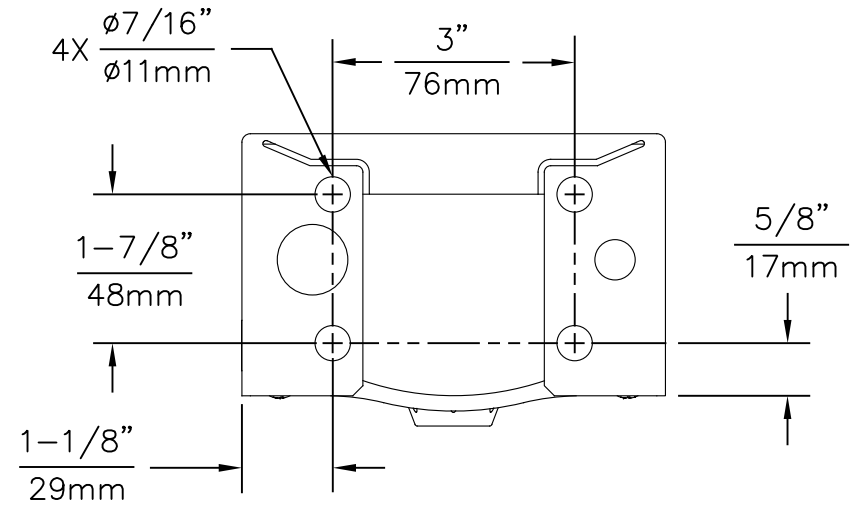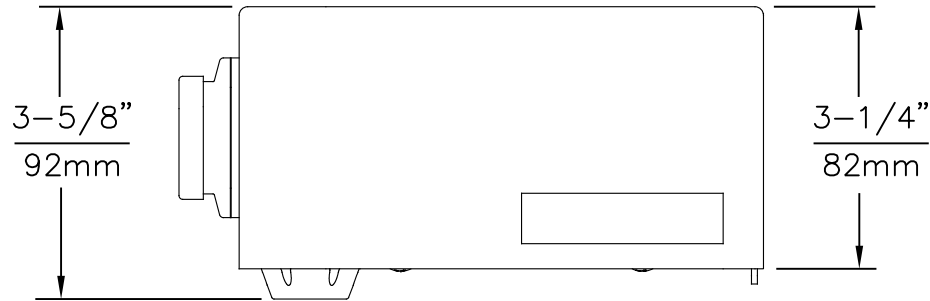


1920 MOUNTING HOLE LOCATIONS

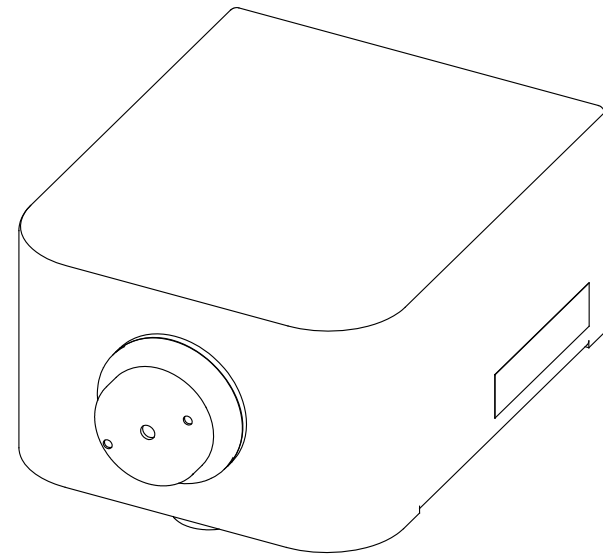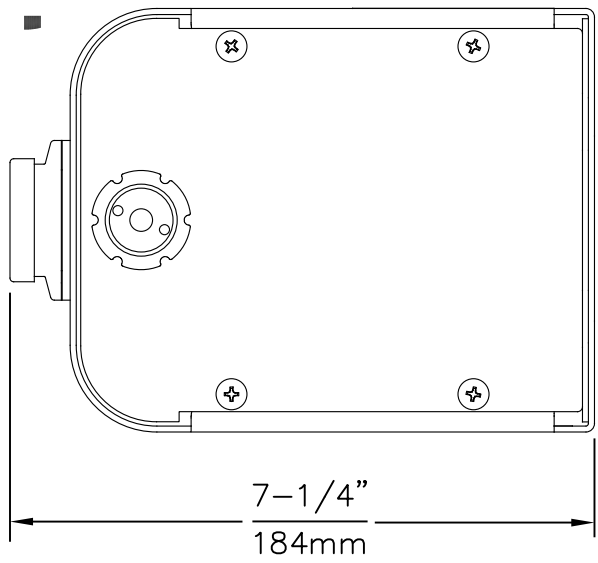

NOTES:


1. SEE SEPARATE INSTALLATION DRAWINGS FOR MOUNTING PLATES AND BACKPANELS
2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.

 Haws®		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM	
		ECN NO. 5081 DRAWN: DS APPROVED: FV	REVISED PER: ECN: 5188 DATE: 05/25/16 DATE: 07/06/17
PART NUMBER 0510000490.D			REVISION 3
SCALE: N/A		DRAWING TYPE: INSTALLATION	SIZE: A SHEET 1 OF 5

6700.4L MOUNTING PLATE
(BEHIND FINISH WALL)
- OR -
6700R RETROFIT PLATE
(ON TOP OF FINISH WALL)

1920/1920HPS

BP32/BP32HPS
(IF FOUNTAIN
HIGH/LOW SIDES
ARE REVERSED
USE BP32R)

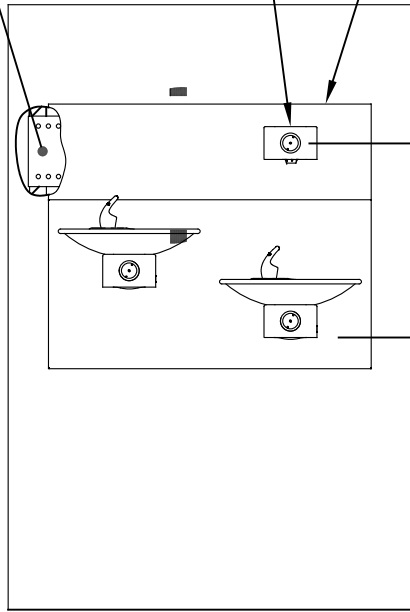

(46-1/4")
(1175mm)
BUTTON
HEIGHT
FOR ADA
COMPLIANCE


(27")
(686mm)

**INSTALLATION ABOVE HAWS 1011, 1011HPS,
1011HPSMS, 1011MS, H1011.8, H1011.8HO, H1011.8HPS**

6700 MOUNTING PLATE
(BEHIND FINISH WALL)
- OR -
6700R RETROFIT PLATE
(ON TOP OF FINISH WALL)

1920/1920HPS

BP15/BP15HPS

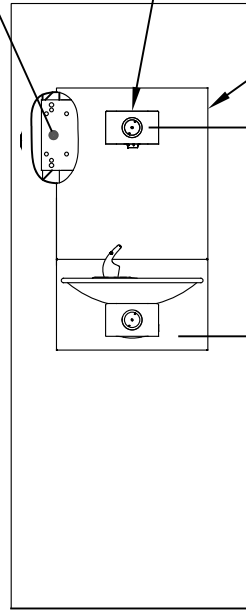


(47-1/2")
(1206mm)
BUTTON
HEIGHT
FOR ADA
COMPLIANCE

(27")
(686mm)

**INSTALLATION ABOVE HAWS 1001, 1001HPS,
1001HPSMS, 1001MS, H1001.8, H1001.8HPS**

5-5/8"
143mm


7-1/4"
184mm

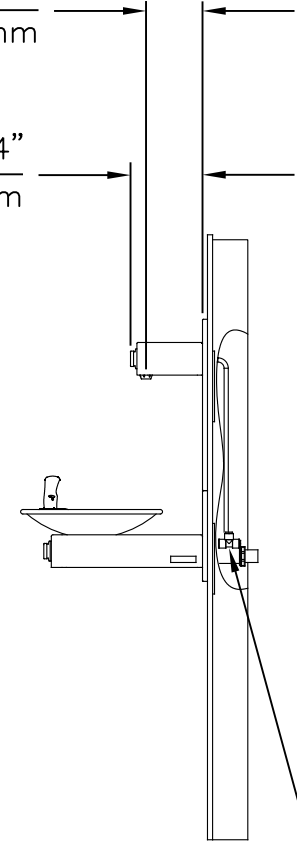

3/8" PUSH IN TEE
(CONNECT TO
FOUNTAIN SUPPLY)


* IF YOUR FOUNTAIN IS THIS STYLE USE
THESE DIMENSIONS

1. SEE SEPARATE INSTALLATION DRAWINGS FOR MOUNTING PLATES AND BACKPANELS
2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.

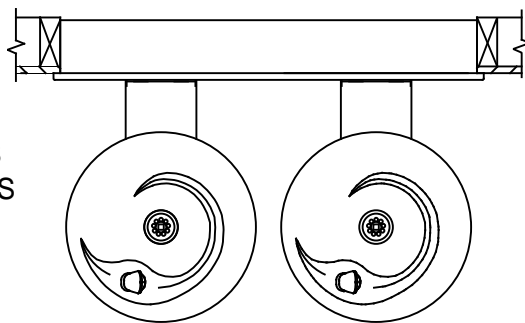


		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM	
		ECN NO. 5081 DRAWN: MJ APPROVED: FV	REVISED PER: 5188 DATE: 01/30/17 DATE: 07/06/17
PART NUMBER 0510000490.D			REVISION 3
SCALE: N/A		DRAWING TYPE: INSTALLATION	SIZE: A SHEET 2 OF 5

6700.4L MOUNTING PLATE
(BEHIND FINISH WALL)
- OR -
6700R RETROFIT PLATE
(ON TOP OF FINISH WALL)

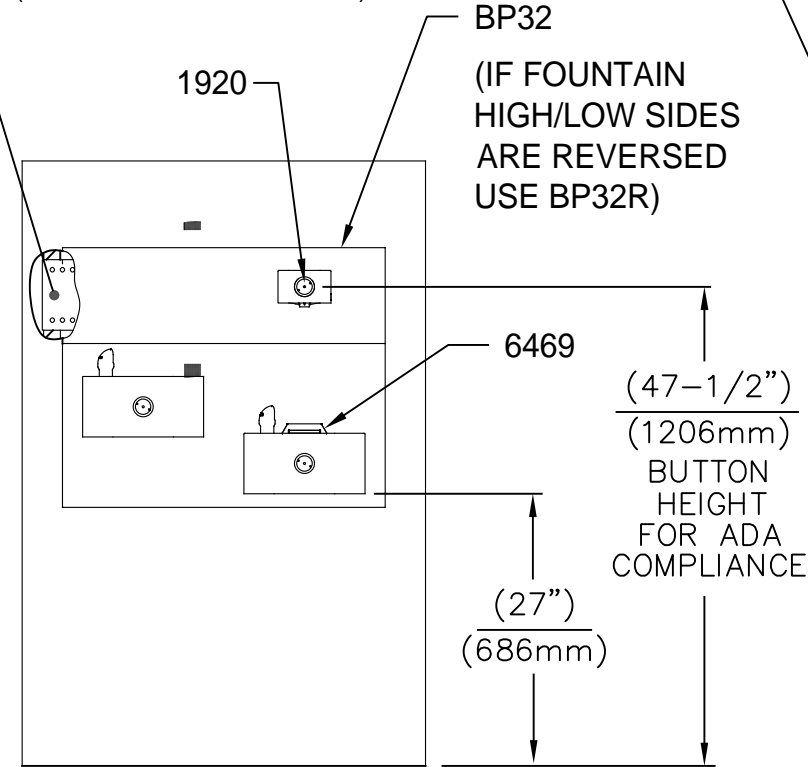


INSTALLATION ABOVE HAWS 1119, 1119.14, H1119.8

6700 MOUNTING PLATE
(BEHIND FINISH WALL)
- OR -
6700R RETROFIT PLATE
(ON TOP OF FINISH WALL)

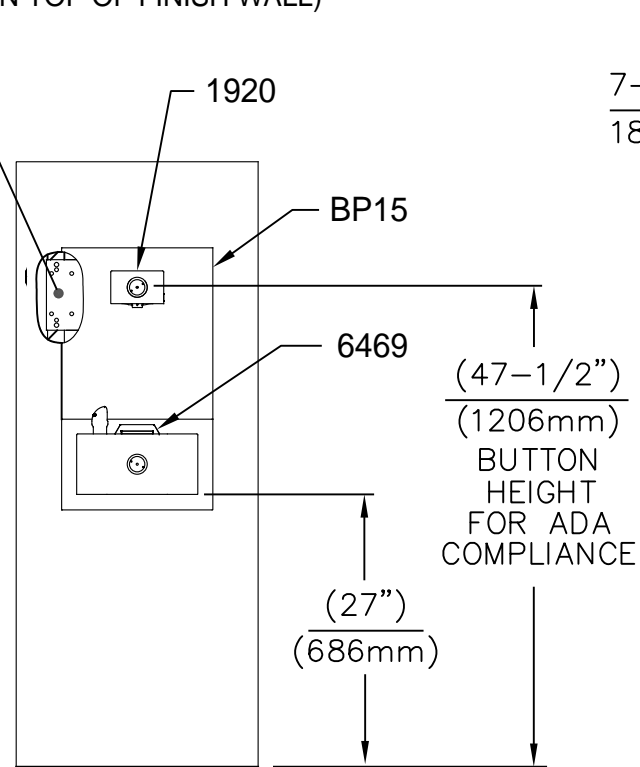


**INSTALLATION ABOVE HAWS 1109,
1109.14, H1109.8**

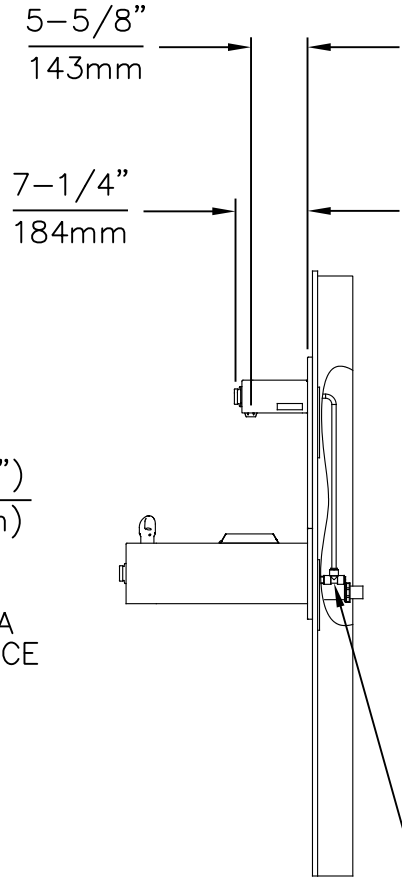

3/8" PUSH IN TEE
(CONNECT TO
FOUNTAIN SUPPLY)


* IF YOUR FOUNTAIN IS THIS STYLE USE THESE DIMENSIONS

1. SEE SEPARATE INSTALLATION DRAWINGS FOR MOUNTING PLATES, BACKPANELS & DRIP TRAY
2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.

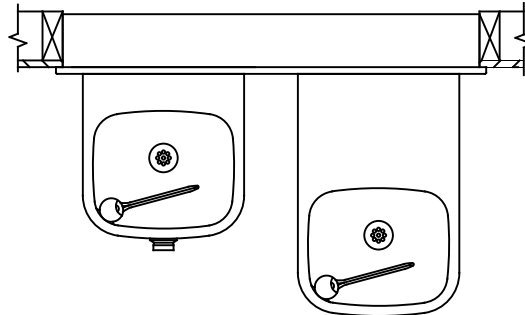


		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM	
ECN NO. 5081	REVISED PER ECN: 5188	BY: JP	MODEL(S)
DRAWN: MJ	DATE: 01/30/17	CHK'D.: VWC	MODEL 1920/1920HPS/1920W
APPROVED: FV	DATE: 07/06/17	SCALE: N/A	DRAWING TYPE: INSTALLATION
PART NUMBER 0510000490.D			REVISION 3
SHEET 3 OF 5			SIZE: A

6700.4L MOUNTING PLATE
(BEHIND FINISH WALL)
- OR -
6700R RETROFIT PLATE
(ON TOP OF FINISH WALL)

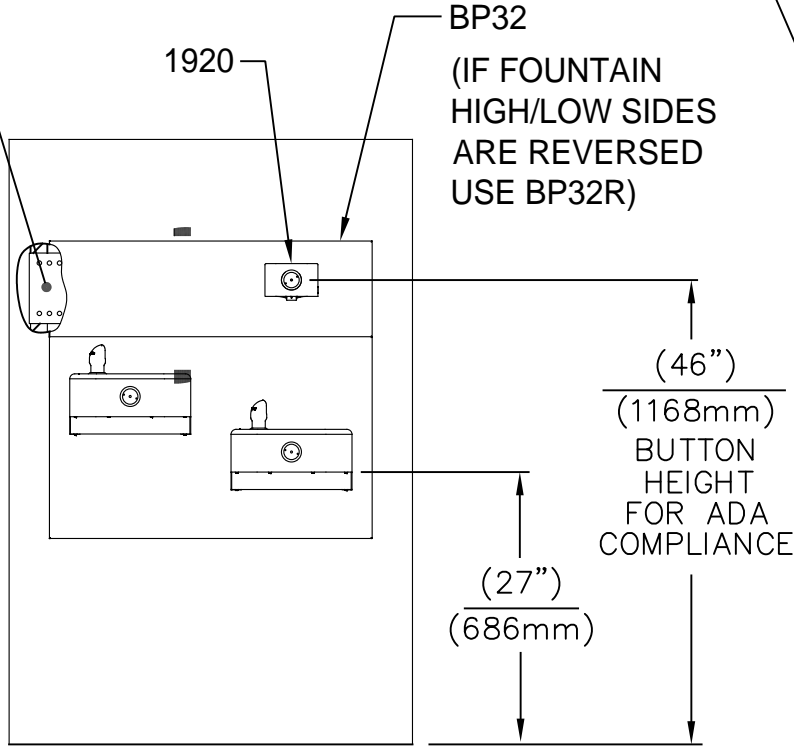


INSTALLATION ABOVE HAWS 1117L, H1117.8

6700 MOUNTING PLATE
(BEHIND FINISH WALL)
- OR -
6700R RETROFIT PLATE
(ON TOP OF FINISH WALL)

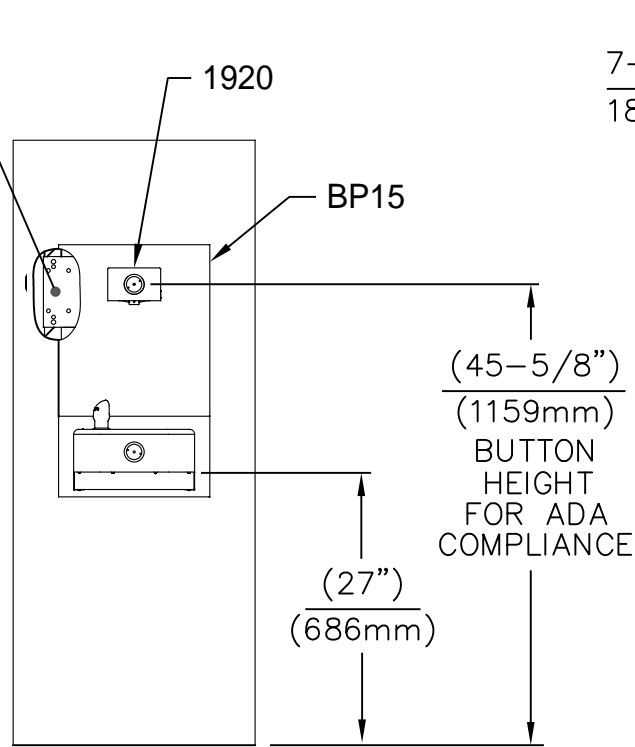


INSTALLATION ABOVE HAWS 1107L, H1107.8

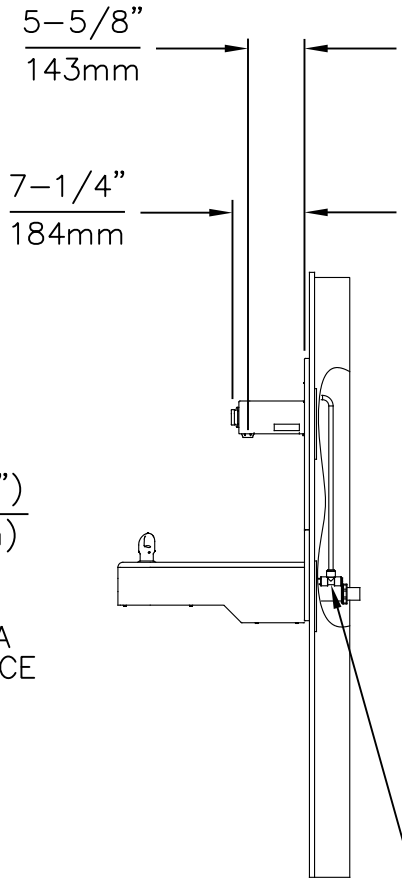

3/8" PUSH IN TEE
(CONNECT TO
FOUNTAIN SUPPLY)


* IF YOUR FOUNTAIN IS THIS STYLE USE THESE DIMENSIONS

1. SEE SEPARATE INSTALLATION DRAWINGS FOR MOUNTING PLATES AND BACKPANELS
2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.

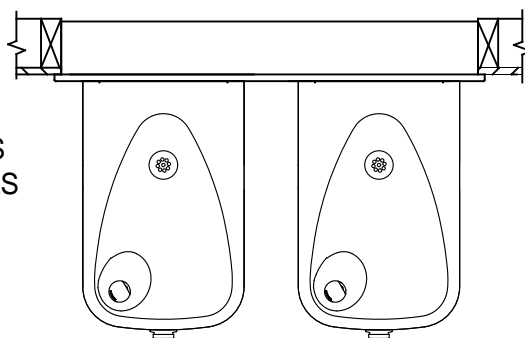


		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM	
ECN NO. 5081	REVISED PER ECN: 5188	BY: JP	MODEL(S)
DRAWN: MJ	DATE: 01/30/17	CHK'D: VWC	MODEL 1920/1920HPS/1920W
APPROVED: FV	DATE: 07/06/17	SCALE: N/A	DRAWING TYPE: INSTALLATION
PART NUMBER 0510000490.D			REVISION 3
SHEET 4 OF 5			SIZE: A

6700.4L MOUNTING PLATE
(BEHIND FINISH WALL)
- OR -
6700R RETROFIT PLATE
(ON TOP OF FINISH WALL)

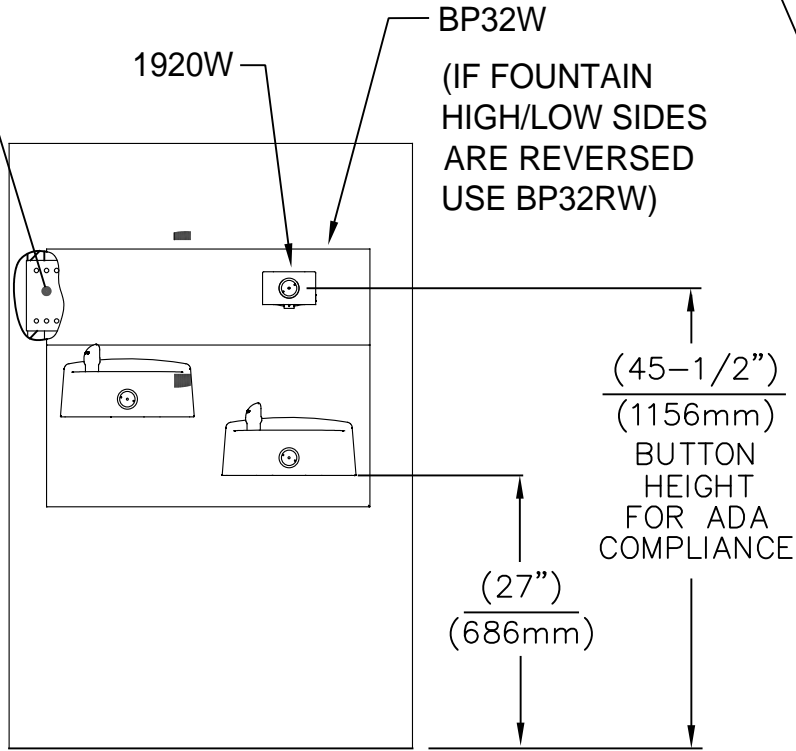


INSTALLATION ABOVE HAWS 1501

6700 MOUNTING PLATE
(BEHIND FINISH WALL)
- OR -
BOLT 1920 ON TO
EXISTING WALL

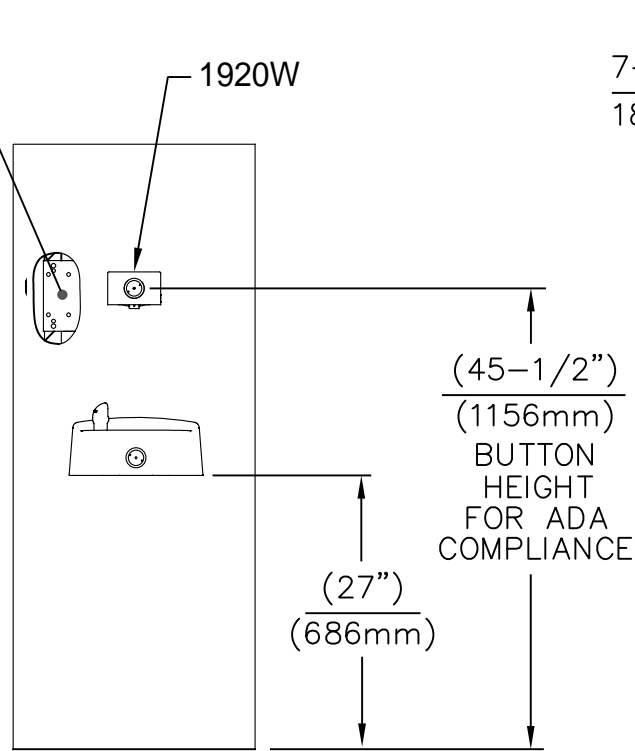


INSTALLATION ABOVE HAWS 1311

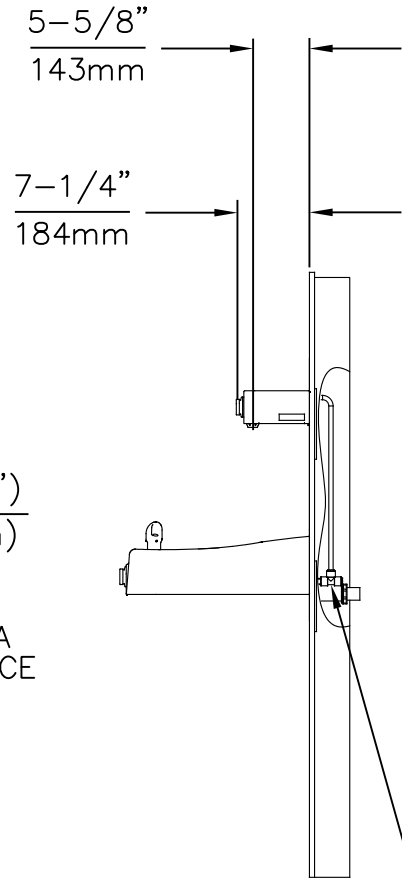

3/8" PUSH IN TEE
(CONNECT TO
FOUNTAIN SUPPLY)

* IF YOUR FOUNTAIN IS THIS STYLE USE THESE DIMENSIONS

1. SEE SEPERATE INSTALLATION DRAWINGS FOR MOUNTING PLATES AND BACKPANELS
2. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION LOCATIONS, WASTE & SUPPLY REQUIREMENTS OTHER THAN SHOWN.

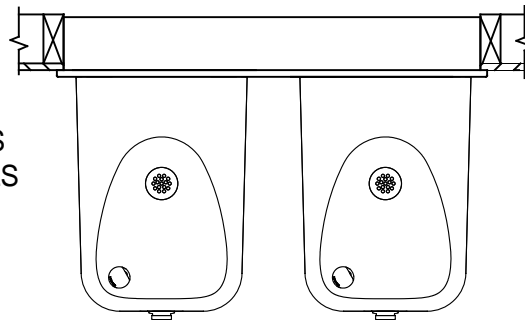

		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM	
ECN NO. 5081	REVISED PER: ECN: 5188	BY: JP	MODEL(S)
DRAWN: MJ	DATE: 02/13/17	CHK'D.: VWC	MODEL 1920/1920HPS/1920W
APPROVED: FV	DATE: 07/06/17	SCALE: N/A	DRAWING TYPE: INSTALLATION
PART NUMBER 0510000490.D			REVISION 3
SHEET 5 OF 5			SIZE: A