

## TECHNICAL DATA SHEET

### DESCRIPTION

Dayton Superior Slab Bolster is a continuous reinforcing bar support.

### APPLICATION

Slab Bolster is used to support the lower slab reinforcing bar on a continuous 5ft long top wire.




### FEATURES

- Available in cover heights from 3/4" to 3" in 1/4" increments
- Top wire corrugations are spaced on 1" centers and serve as guides for reinforcing bar spacing
- Available in plain, epoxy or galvanize coatings and stainless steel
- 5' lengths standard, other lengths available as special order

### BENEFITS

- Continuous design reduces labor time placing rebar

### TECHNICAL DATA

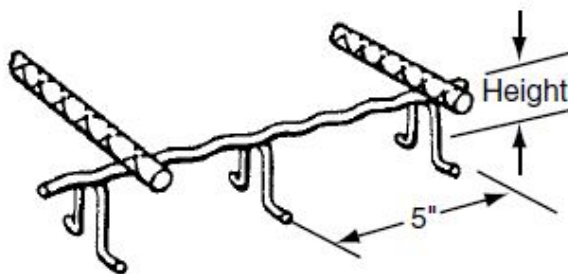

Leg spacing: 5 inch centers

### APPROVALS / COMPLIANCE

- CRSI RB4.1-2014
- ACI-50-66
- ACI315 and AC-315R

### INSTALLATION

1. Per CRSI RB4.1-2014 bar supports spacing guidelines

### RELATED PRODUCTS

- SBU Slab Bolster Upper
- BB Beam Bolster
- BBU Beam Bolster Upper

### HOW TO ORDER

- Specify: (1) Linear feet required, (2) Slab Bolster (3) Finish (plain, epoxy, galv, stainless steel) (4) feet: plain, dipped or tipped

### ORDERING INFORMATION

#### PLAIN (CLASS 3)

Product Code	Description	Weight
70100	3/4" X 5'	0.1787 LB
70200	1" X 5'	0.18 LB
70300	1-1/4" X 5'	0.1908 LB
70400	1-1/2" X 5'	0.1938 LB
70410	1-3/4" X 5'	0.1971 LB
70420	2" X 5'	0.216 LB
70430	2-1/4" X 5'	0.236 LB
70440	2-1/2" X 5'	0.245 LB
70450	2-3/4" X 5'	0.26 LB
70460	3" X 5'	0.2588 LB

#### PLASTIC TIPPED (CLASS 1)

Product Code	Description	Weight
70106	3/4" X 5'	0.1818 LB
70206	1" X 5'	0.1844 LB
70306	1-1/4" X 5'	0.1922 LB
70406	1-1/2" X 5'	0.1928 LB
70416	1-3/4" X 5'	0.2001 LB
70426	2" X 5'	0.21 LB
70436	2-1/4" X 5'	0.213 LB
70446	2-1/2" X 5'	0.235 LB
70456	2-3/4" X 5'	0.2444 LB
70466	3" X 5'	0.2455 LB

#### GALVANIZED & TIPPED (CLASS 1)

Product Code	Description	Weight
70209	1" X 5'	0.18 LB
70309	1-1/4" X 5'	0.18 LB
70409	1-1/2" X 5'	0.18 LB
70419	1-3/4" X 5'	0.21 LB
70429	2" X 5'	0.21 LB
70439	2-1/4" X 5'	0.21 LB
70449	2-1/2" X 5'	0.24 LB
70459	2-3/4" X 5'	0.24 LB
70469	3" X 5'	0.25 LB

**TECHNICAL DATA SHEET**
**PLASTIC DIPPED (CLASS 1)**

Product Code	Description	Weight
70103	3/4" X 5'	0.19 LB
70203	1" X 5'	0.19 LB
70303	1-1/4" X 5'	0.2 LB
70403	1-1/2" X 5'	0.202 LB
70413	1-3/4" X 5'	0.21 LB
70423	2" X 5'	0.23 LB
70433	2-1/4" X 5'	0.25 LB
70443	2-1/2" X 5'	0.26 LB
70453	2-3/4" X 5'	0.27 LB
70463	3" X 5'	0.28 LB

**EPOXY COATED (CLASS 1A)**

Product Code	Description	Weight
70107	3/4" X 5'	0.1768 LB
70207	1" X 5'	0.183 LB
70307	1-1/4" X 5'	0.1984 LB
70407	1-1/2" X 5'	0.2127 LB
70417	1-3/4" X 5'	0.2206 LB
70427	2" X 5'	0.2242 LB
70437	2-1/4" X 5'	0.235 LB
70447	2-1/2" X 5'	0.2464 LB
70457	2-3/4" X 5'	0.26 LB
70467	3" X 5'	0.2684 LB

**EPOXY COATED & PLASTIC DIPPED (CLASS 1A)**

Product Code	Description	Weight
701073	3/4" X 5'	0.19 LB
702073	1" X 5'	0.19 LB
704073	1-1/2" X 5'	0.21 LB
704273	2" X 5'	0.23 LB
704473	2-1/2" X 5'	0.26 LB
704673	3" X 5'	0.28 LB

**MANUFACTURER**

Dayton Superior Corporation  
 1125 Byers Road  
 Miamisburg, OH 45342  
 Customer Service: 888-977-9600  
 Technical Services: 877-266-7732  
 Website: [www.daytonsuperior.com](http://www.daytonsuperior.com)

**WARRANTY (ACCESSORIES)**

Limited Warranty. Dayton warrants, for a period of 60 days from the date of shipment (three years from the date of shipment in the case of formwork, excluding any consumable Products included with such formwork), that Products and any associated application drawings and engineering services provided by Dayton ("Ancillary Services") will be free from defects in material and workmanship and, in the case of custom designed formwork, that the formwork will meet the specifications set forth in the design drawings approved by Dayton and Customer. Any claim under this warranty must be made in writing within such warranty period. If any Product and/or Ancillary Service covered by a timely claim are found to be defective, Dayton will, within a reasonable time, make any necessary repairs or corrections or, at Dayton's option, replace the Product. Unless pre-authorized by Dayton in writing, Dayton will not accept any charges for correcting defects or accept the return of any Product. This warranty will not apply to any Products that have been subjected to misuse, neglect, storage damage, misapplication, accident or any other damage caused by any person other than Dayton, or that have not been maintained in accordance with Dayton's specifications. THIS LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AS TO THE PRODUCTS AND ANCILLARY SERVICES. DAYTON MAKES NO OTHER WARRANTIES OR GUARANTEES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE. THE REMEDIES SET FORTH IN THIS SECTION ARE CUSTOMER'S EXCLUSIVE REMEDY FOR BREACH OF WARRANTY.