



# Primme® Manual | K-76318

Urinal flushometer, 0.5 gpf

## Features

- Fixture-mount design
- Chloramine resistance on all rubber components exposed to waterway
- Includes vacuum breaker and control stop



## Sustainability



## Available Colors/Finishes

*Color tiles intended for reference only.*

■ CP Polished Chrome



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
4-15-2026 3:15 - US-CA

THE BOLD LOOK  
OF **KOHLER**®

## Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

*This product should be used with a WaterSense labeled counterpart with the same rated flush volume to ensure the complete system meets the requirements of this specification for water efficiency and performance.*



ASSE 1037/ASME A112.1037/CSA B125.37

EPA WaterSense®

ADA

ICC/ANSI A117.1

CSA B651

OBC

## Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty

## Technical Information

*All product dimensions are nominal.*

### Handle

Handle Style/ Type: Lever

## Pressure/Fixture Supply Requirements

Minimum Flowing Pressure: 25 psi (172.4 kPa)

Minimum Flow Rate: 9 gpm (34.1 l/min)

## Material

- Durable brass construction

## Recommended Products/Accessories

K-23723 Faucet cleaner

## Technology

- Nonhold open piston technology for accurate activation




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

4-15-2026 3:15 - US-CA

\*10-3/4" (273 mm) minimum with a  
6" (152 mm) critical level above the fixture

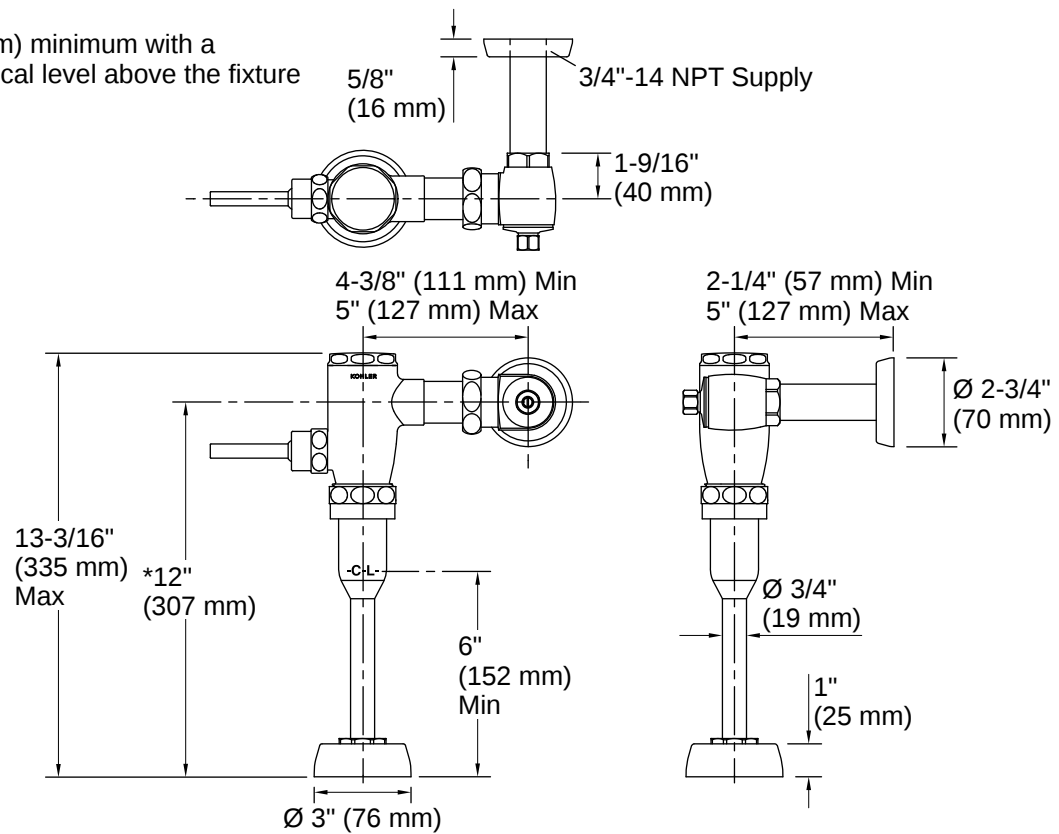

## Installation

- Intended for urinal installations with 3/4" (19 mm) top spud coupling connection

## Installation Notes

*Install this product according to the installation instructions.*

This product should be used with a WaterSense labeled counterpart with the same rated flush volume to ensure the complete system meets the requirements of this specification for water efficiency and performance.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.

4-15-2026 3:15 - US-CA