

Features

- Engineered for optimal performance with KOHLER Highcliff™ Ultra, Wellcomme™ Ultra, Juvenile Ultra, and Primary™ Ultra toilets.
- Fixture-mount design.
- 1.1 gpf (4.2 lpf) toilet valve use at least 31 percent less water than standard 1.6 gpf (6.0 lpf) toilet valve while still meeting strict performance guidelines.

Material

- Durable brass construction.
- Chloramine resistance on all rubber components exposed to waterway.

Technology

- Non-hold open piston technology for accurate activation.

Installation

- Intended for toilet installations with 1-1/2" (38 mm) top spud coupling connection.
- Includes vacuum breaker and control stop.

Recommended Products/Accessories

K-23723 Faucet cleaner



ADA

CSA B651

OBC

Codes/Standards

ASSE 1037/ASME A112.1037/CSA B125.37
EPA WaterSense®
ADA
ICC/ANSI A117.1
CSA B651
OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description



CP Polished Chrome

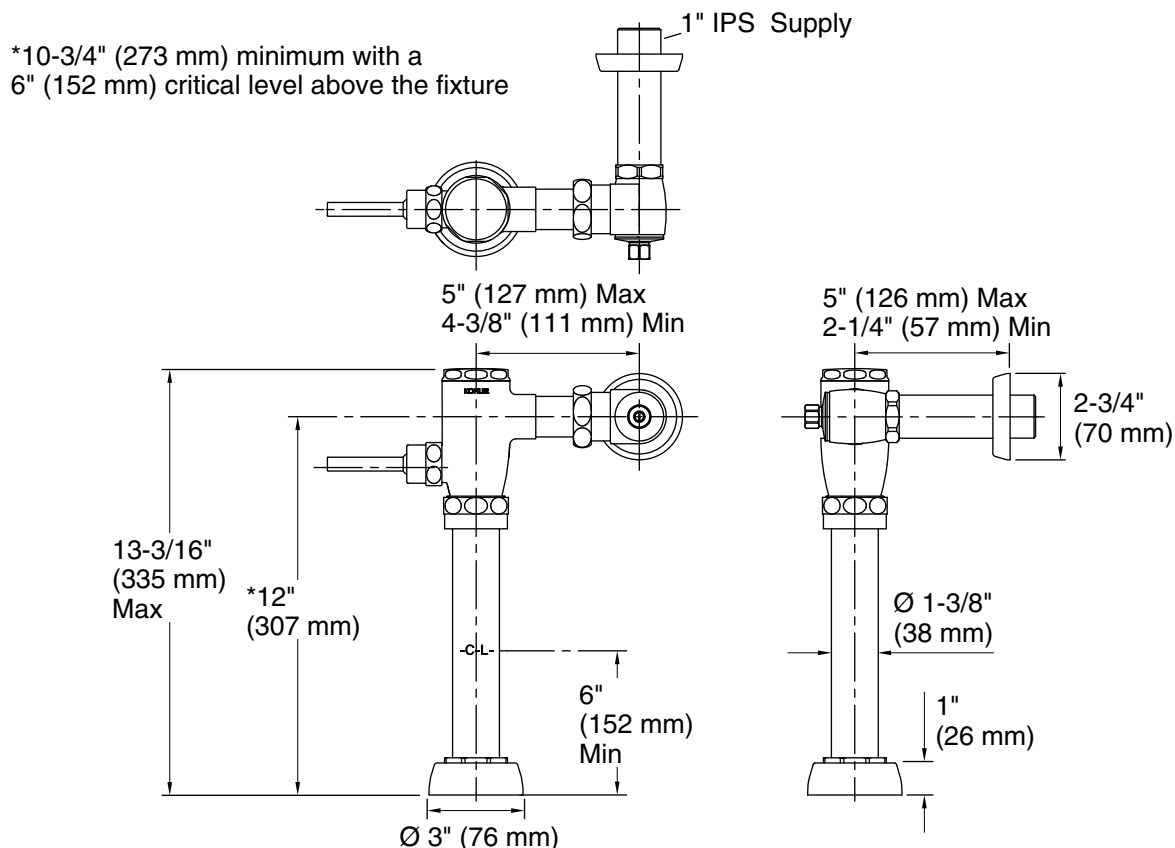

Technical Information

All product dimensions are nominal.

Fixture pressure 80 psi (551.6 kPa)
max (static):

Pressure and Supply Requirements

Fixture pressure min 35 psi (241.3 kPa)
(static):

Fixture Supply Requirements

Min static pressure: 35 psi (241.3 kPa)
Max static pressure: 80 psi (551.6 kPa)
Min flowing pressure: 25 psi (172.4 kPa)
Min flow rate: 25 gpm (94.6 lpm)

Notes

Install this product according to the installation guide.

Use only with toilets designed for use with 1.1 gpf (4.16 lpf) flushometers.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.