

#### Features

- Includes face plate with handle, shower arm with flange and showerhead.
- Single handle controls both on/off activation and temperature setting.
- Supplied with ADA compliant metal cross handle.
- Includes single function 2.5 gpm (9.5 l/min) showerhead.
- Showerhead features MasterClean<sup>™</sup> sprayface for easy cleaning.
- Complements the Pinstripe faucet and accessory collections.

#### Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing, exceeding industry durability standards.

#### Installation

• Trim set requires valve to complete installation.

#### **Required Accessories**

K-304/K-P304 Series Rite-Temp® Valves

or

K-8304/K-P8304 Series Rite-Temp $\ensuremath{\mathbb{R}}$  Valve & Cartridge Kits or

K-8300/K-P8300 Series Rite-Temp® Valve Body Rough-ins K-8305/K-P8305 Series Rite-Temp® Cartridges

or

K-2971-KS 3/4" Pressure-balancing Valve

#### **Optional Accessories**

K-10350 Deep Rough-In Kit For K-8305 Cartridges K-10351 Test Cap For K-8300 Series Valve Bodies



Rite-Temp® Shower Valve Trim



#### Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992

## KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

#### **Available Color/Finishes**

Color tiles intended for reference only.

#### Color Code Description

CP	Polished Chrome
SN	Vibrant® Polished Nickel

BN Vibrant® Brushed Nickel




## **Pinstripe**®

K-TS13134-3B

# KOHLER. Faucets

### Pinstripe® Rite-Temp® Shower Valve Trim K-TS13134-3B

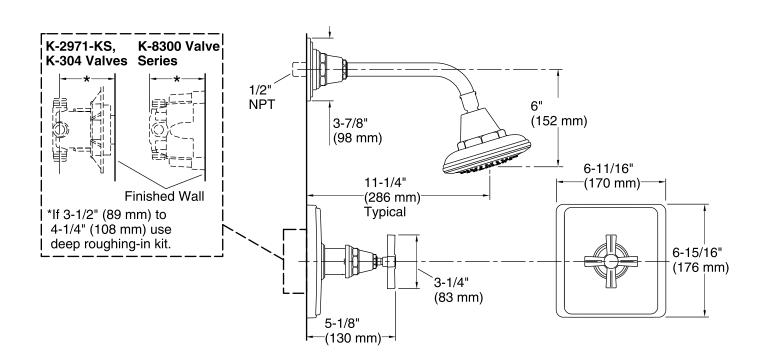

#### **Technical Information**

All product dimensions are nominal.

#### Showerhead:

Rated maximum flow:2.5 gal/min (9.5 l/min)Pressure:80 psi (5.5 bar)

#### Notes

Install the product according to the installation guide.

NOTICE: Risk of product damage. Long screws for installing trim can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

