

Flush Mount

Ceiling mounted • Damp location listed



Description:

One-light LED flush mount features a modern square pattern in a Brushed Nickel metal shade that surrounds a summer linen fabric shade with a glass diffuser. 3000K, 90+ CRI 1,211 lumens 71.2 lumens/watt per module (source).

Specifications:

- Brushed Nickel (-09) (plated)
- Steel Construction
- Fabric Shade glass shade
- LED Module is replaceable (part # 93053641)
- Concentric circular pattern in a Brushed Nickel metal shade.
- Contemporary styling.
- Dimmable to 10% with many ELV dimmers
- 3000K color temperature, 90+ CRI.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified

Performance:

Number of Modules	1
Input Power	17w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1211/71.2 (LM-82)
Lumens/LPW (Delivered)	795.42/49.1 (LM-79)
CCT	3000 K
CRI	90+
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Damp location listed
	ENERGY STAR® qualified

P2330-0930K9

Images:



Dimensions:

Diameter: 11"
Height: 5-7/8"

Flush Mount

Ceiling mounted • Damp location listed



Photometrics:


P2330-0930K9

ELECTRICAL DATA		P2330-0930K9
Input Voltage		120 V
Input Frequency		60 Hz
Input Current		0.142 A
Input Power		17
Power Factor		Greater than 0.90
THD		<20%
FCC		Meets FCC Title 47, Part 15 Class B
Operating Temperature		-30 °C to 30 °C
Dimming		Yes*

*See Dimming Notes for more information

P2330-0930K9

LED Light Engine: 3000 K 90+
System Wattage: 17
Fixture delivered lumens: 795.42
Fixture Efficacy: 49.1
Spacing Criteria: 1.2

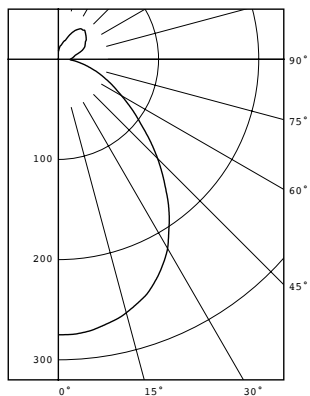

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	275	
5	274	26
15	262	74
25	237	109
35	193	120
45	140	108
55	92	83
65	58	58
75	33	35
85	15	17
90	11	
95	14	15
105	19	21
115	29	28
125	34	30
135	38	29
145	37	23
155	27	13
165	17	5
175	11	1
180	8	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	209	26.3
0-40	329	41.4
0-60	519	65.4
0-90	630	79.2
90-120	64	8.1
90-130	94	11.9
90-150	146	18.4
90-180	165	20.8
0-180	795	100.0

Test 16.00718 Test Date 03/16/16

P2330-0930K9**Dimming Notes:**

P2330 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Nova T NTELV-300

Lutron Vienti VTELV-600

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Leviton Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.
Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.