

Assembly Instruction Sheet #IS-MHE8410 For Styles MHE8410K and MHE8410VN

Please go to www. quozel. com for product cleaning tips. Go to the **Care + Maintenance** selection.

Tools Required: Flathead screwdriver, Phillips screwdriver, pliers, wire cutters, wire strippers, electrical tape, safety glasses.

Light Source: (3) Candelabra Base 60W Maximum

Estimated Assembly Time: 20-30 minutes

Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement parts.



Warnings and Cautions


Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt.

These instructions are provided for your safety. It is very important you read them completely before installing the fixture. We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal. Do not subject glass parts to any shock while in operation or shattering may result.

Package Contents

Part	Description	Quantity
A	Crossbar	1 pc.
B	Mounting Screw	2 pcs.
C	Lock Washer	2 pcs.
D	Hex Nut	2 pcs.
E	Lock Ball	2 pcs.
F	Fixture Loop	1 pc.
G	Fixture Body	1 pc.
H	Panel	4 pcs.
I	Cage	1 pc.
J	Lock Screw	2 pcs.
K	Alternate Mounting Screw	2 pcs.

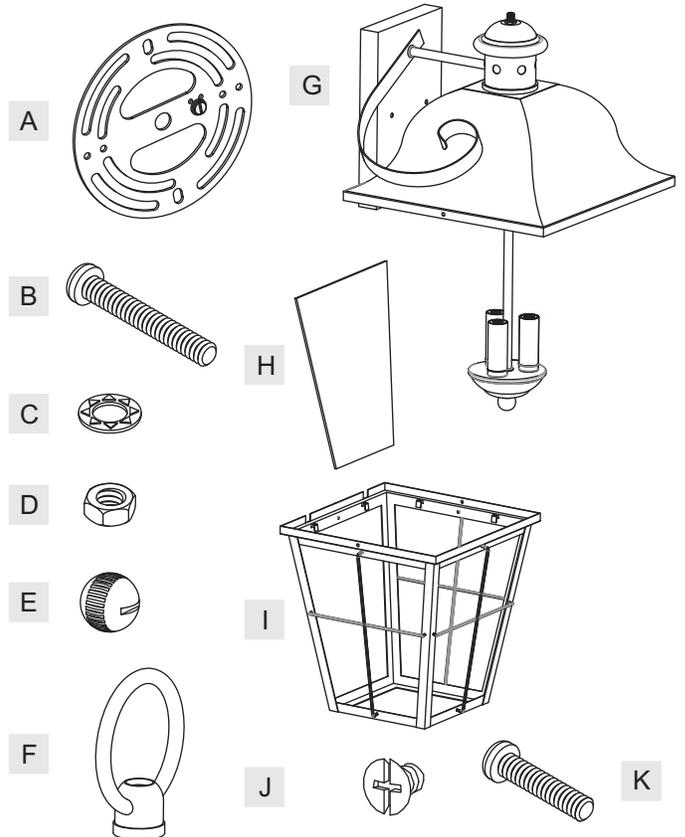

Thank you for purchasing a Quoizel product.






Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
 or visit us on-line at www. quozel. com

MHE8410K

MHE8410VN

FINISH: MYSTIC BLACK

FINISH: VENETO

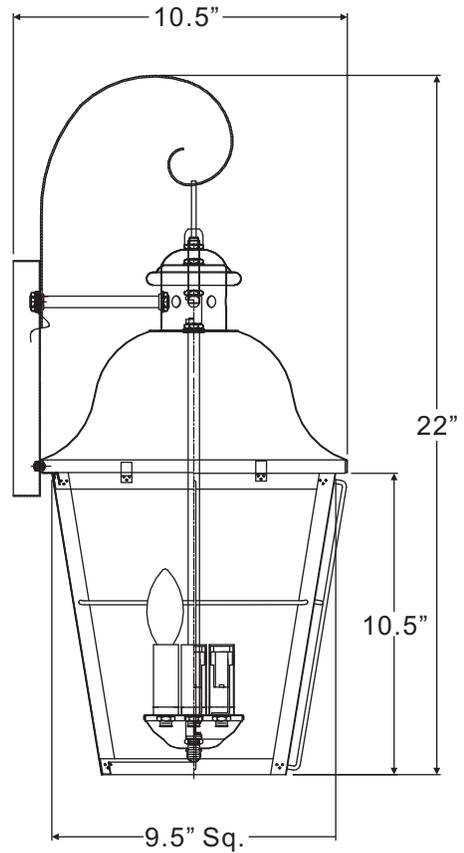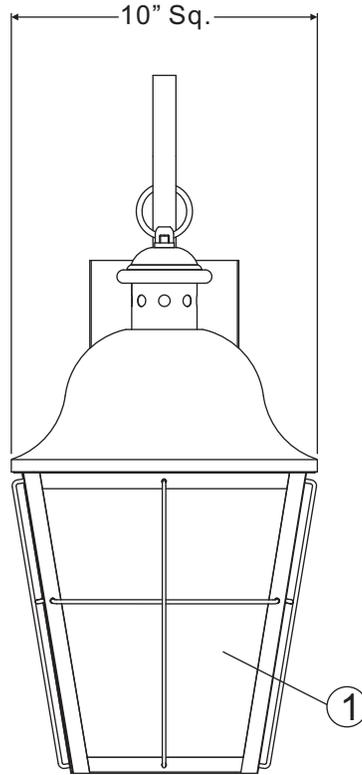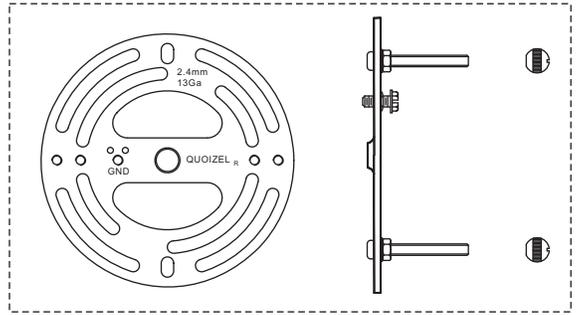

(3) 60W Candelabra
Base Bulbs
(No Supplied)

NOTE: ALL DIMENSIONS ARE ROUNDED UP TO THE NEAREST 1/2"

NO.	PART NUMBER	REPLACEMENT PART DESCRIPTION	REQ.
1	G3780PA	CLEAR SEEDY GLASS PANEL	4

STEP 1 – Attach Fixture Loop onto Fixture Body

- A. Thread the Fixture Loop (F) onto the Nipple on the top of Fixture Body (G). Hand tighten until snug.

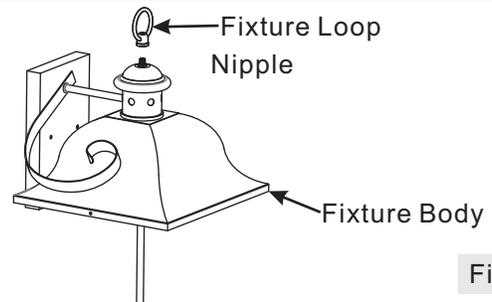


Figure 1

STEP 2 – Fix the Flat Scroll in place

- A. Rotate the Flat Scroll to the top of the fixture. Pull the scroll end into the Fixture Loop (F).

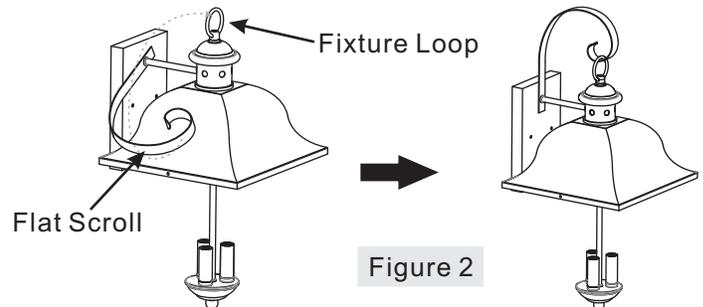


Figure 2

STEP 3 – Attach panel to Cage

- A. Insert Panels (H) into the Slot in the bottom of the Cage (I) then fold the Tabs in the top of the Cage (I) to secure the Panels (H).

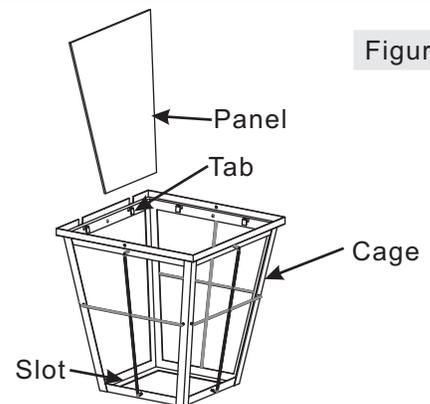


Figure 3

STEP 4 – Attach Cage with Panels to Fixture Body

- A. Align Slots on the top of Cage (I) with the Studs inside of Fixture Hood, the Hole on the Fixture Hood with the Mounting Hole on the Cage, secure by thread Lock Screw (J) into the Mounting Hole. Tighten until snug.

Note: please make sure have Slot side of Cage over against the backplate.

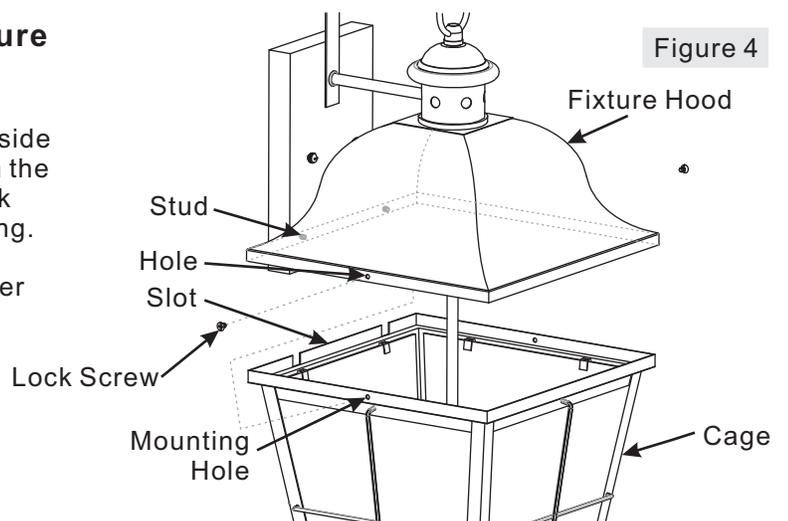


Figure 4

Thank you for purchasing a Quoizel product.

Need assistance with parts or assembly? Call Quoizel customer service at 1-631-273-2700
or visit us on-line at www. quozel. com

STEP 5 – Attach Mounting Screws, Lock Washers and Hex Nuts to Crossbar

- A. Line up a set of holes on the Crossbar (A) and Holes on the Backplate of the Fixture Body (F).
- B. Thread Mounting Screws (B) or alternate short mounting screws (K) into the holes on the Crossbar (A), pass Lock Washers (C) and thread Hex Nut (D) onto the Mounting Screws (B) or alternate short mounting screws (K) . Hand tighten until snug.

Note: Use the Alternate Shorter Mounting Screw (K) if your installation requires a shorter mounting screw.

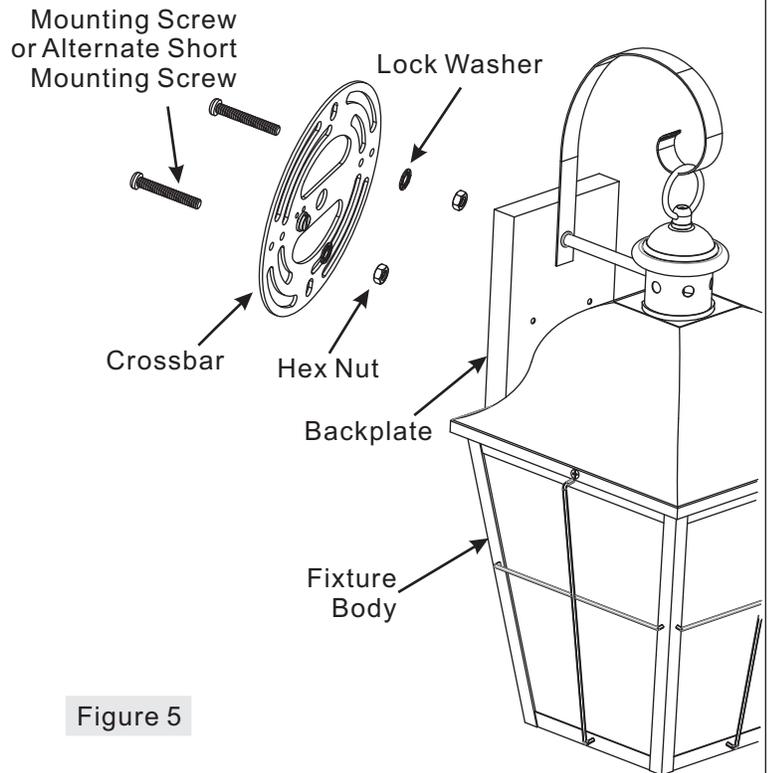


Figure 5

STEP 6 – Attach Crossbar to Outlet Box

- A. Attach the Crossbar (A) to Outlet Box and secure by threading Outlet Box Screws (not supplied) into the Mounting Holes on the Outlet Box. Tighten until snug.

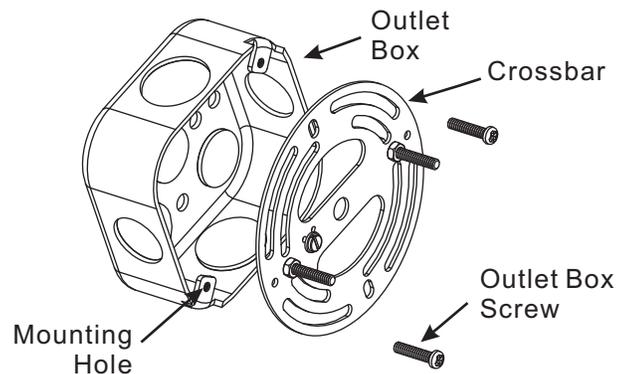


Figure 6

Thank you for purchasing a Quozel product.

Need assistance with parts or assembly? Call Quozel customer service at 1-631-273-2700
or visit us on-line at www. quozel. com

STEP 7 – Make Wire Connections

- Use standard wire connectors to make all wire connections. (Connectors are not included with fixture.) Strip and prepare wire ends according to instructions supplied with connectors.
- Connect White Supply Wire from the Outlet Box to White Wire from fixture.
- Connect Black (or Red) Supply Wire from the Outlet Box to Black Wire from fixture.
- Connect Ground Wire from the Outlet Box to Ground Wire from fixture.
- Twist connectors until wires are tightly joined together.
- Wrap each connection with approved electrical tape and carefully stuff all the connected wires into the Outlet Box.

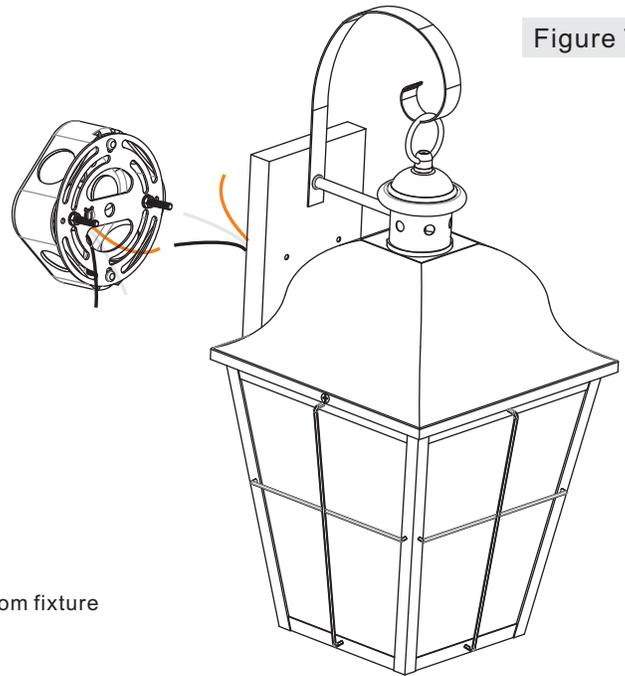


Figure 7

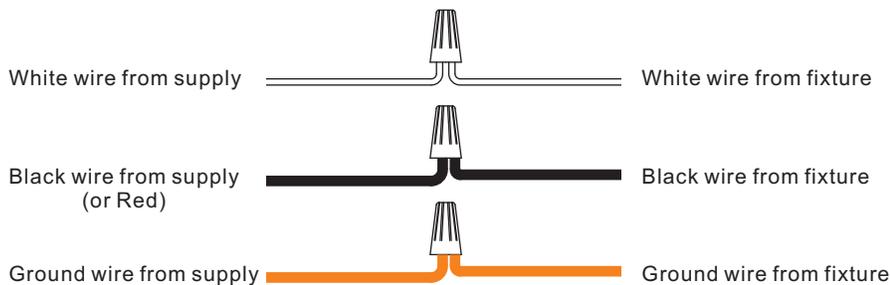


Figure 8

STEP 8 – Attach Fixture Body to Mounting Screw

- Place the Backplate of the Fixture Body (F) over the Mounting Screws (B) or Alternate Short Mounting Screw (K). Place caulk (not supplied) into threads of Mounting Balls (E) and thread them onto the Mounting Screws (B) or Alternate Short Mounting Screw (K). Hand tighten until snug.

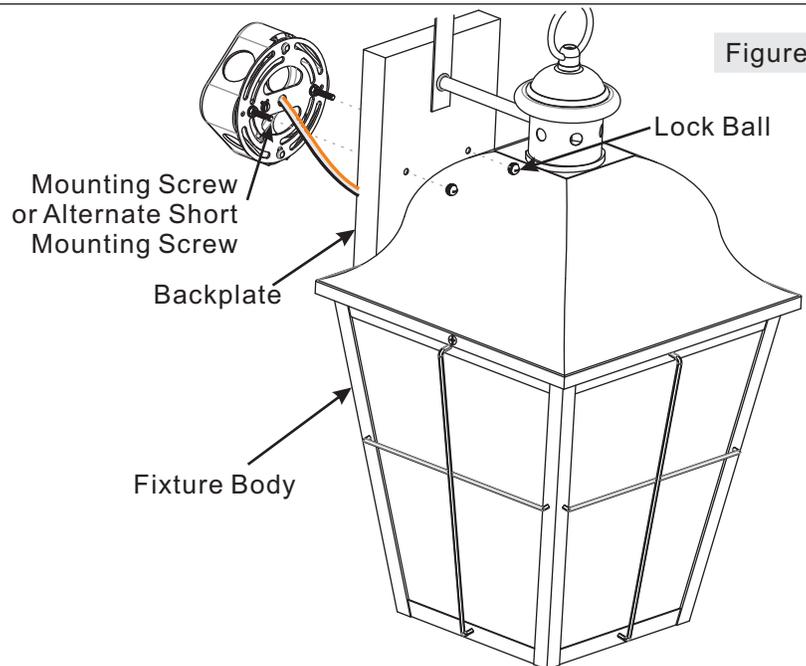


Figure 9


Thank you for purchasing a Quozel product.

Need assistance with parts or assembly? Call Quozel customer service at 1-631-273-2700
or visit us on-line at www. quozel. com

STEP 9 – Install Bulb

- A. This fixture uses standard bulbs with a standard screw base. Maximum 60 watts.
- B. Insert bulb and screw properly into place.

Figure 10

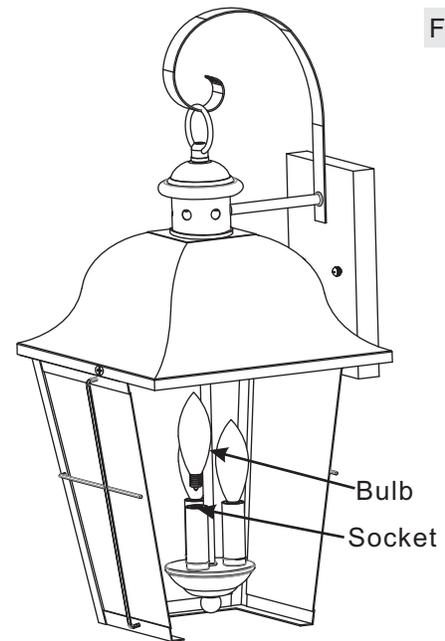


STEP 10 – Apply Silicone Sealer

- A. Make sure exterior wall surface and fixture backplate are free of dirt before applying caulk. Using exterior grade caulk, caulk over top of backplate and down other side. Do not caulk bottom of fixture backplate to ensure proper moisture drainage.

Your fixture is now assembled and ready to use.
Enjoy!

Figure 11

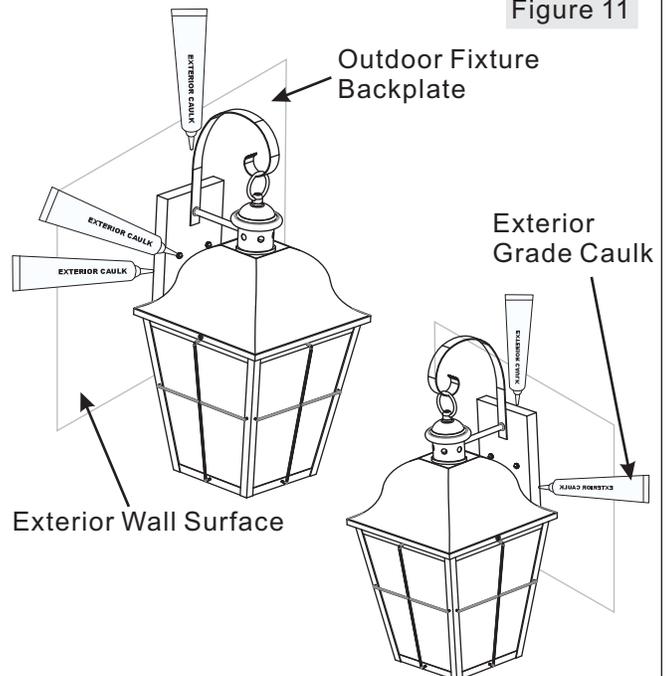

Thank you for purchasing a Quozel product.
Need assistance with parts or assembly? Call Quozel customer service at 1-631-273-2700
or visit us on-line at www. quozel. com