

ELKAY[®]

SPECIFICATIONS

Model LK4460YHHB Yard Hydrant (Hose Bib) and
 Model LK4461YHLHB Yard Hydrant (Locking Hose Bib)
**Please see table below for entire sku*

MODELS: LK4460YHHB and LK4461YHLHB

GENERAL

Pedestal Steel yard hydrant with textured powder coat finish and E-Coat immersion for year-round beauty with minimum maintenance. The E-Coat immersion process coats the outside and inside of the hydrant for the ultimate in corrosion protection. Hydrant provides ability to connect garden hoses or fill pails in outdoor applications. Ideal for golf courses, ball parks and swimming pools for irrigation purposes. This hydrant is rated for inlet water pressure of 20-105 psi. Model LK4460YHHB is hydrant with non-locking hose bib. Model LK4461YHLHB includes panel and a door that can be secured with a standard padlock (not included).

WATER INLET & DRAIN OUTLET

Inlet: 1/2" O.D. Tubing

SUGGESTED SPECIFICATIONS

Hydrant shall include 10" domed cap with vandal-resistant screws. Model LK4460YHHB has access panel with recessed hose bib. Model LK4461YHLHB has access panel with recessed hose bib and a door that can be secured with a standard padlock (not included). Not designed for sub-freezing applications.

Note: Continued product improvement makes specifications subject to change without notice. See the Elkay website for the most current spec sheet.

Yard Hydrant



Model LK4460YHHB

Model LK4461YHLHB

***FINISH COLOR OPTIONS – Choose color option to complete your model number, add as suffix example: LK4460YHHBEVG or LK4461YHLHBEVG**

Matte finish: Evergreen = **EVG**

Gloss finish:

- | | | |
|---------------------------------------------|----------------------------------------------|--------------------------------------------------|
| <input type="checkbox"/> Beige = BGE | <input type="checkbox"/> Gray = GRY | <input type="checkbox"/> Terracotta = TER |
| <input type="checkbox"/> Black = BLK | <input type="checkbox"/> Orange = ORN | <input type="checkbox"/> White = WHT |
| <input type="checkbox"/> Blue = BLU | <input type="checkbox"/> Purple = PUR | <input type="checkbox"/> Yellow = YLW |
| <input type="checkbox"/> Brown = BRN | <input type="checkbox"/> Red = RED | |

Now Available
in 12 Colors!



Each LK4460 / LK4461 consists of 1 carton of the following:
Hydrant

Service Stop not included.

Job Name: _____

Model: _____ Qty. _____

Contact: _____

Approval Signature: _____

Notes:

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producer's offerings, be certain these features are not overlooked.

MODELS LK4460YHHB and LK4461YHLHB Tubular Yard Hydrant

(CONTINUED)

MOUNTING INSTRUCTIONS and PLUMBING CONNECTIONS
Provide solid, well-drained surface to mount hydrant (concrete pad recommended.) (6) 3/8" minimum fasteners (not included) should be attached securely to mounting surface in order to secure fountain. (Refer to rough-in diagram.)

Locate and install plumbing through ground as required.

NOTE: Hydrant is not furnished with service valve.


Position hydrant over plumbing and secure base to fasteners. Remove access panel and connect supply and water lines. Turn on water supply and check for leaks. Reassemble access panel to pedestal. Refer to owners' manual for detailed instructions.

Hydrant is rated for inlet water pressure of 20-105 psi. A pressure reducing regulator should be used if the inlet water supply exceeds 105 psi.


NOTE: Not designed for sub-freezing applications.

OPERATING PRESSURES:
Supply water 20 – 105 psi maximum

Model LK4460YHHB

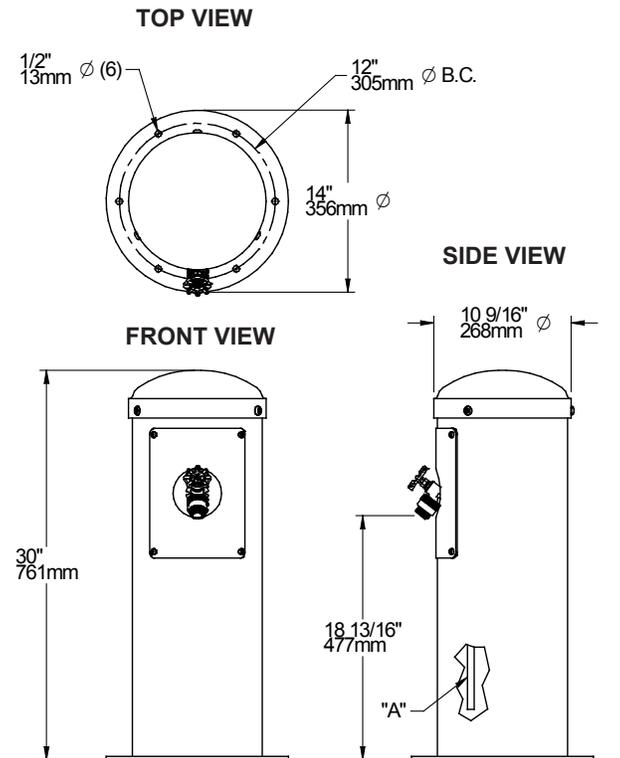

Model LK4461YHLHB

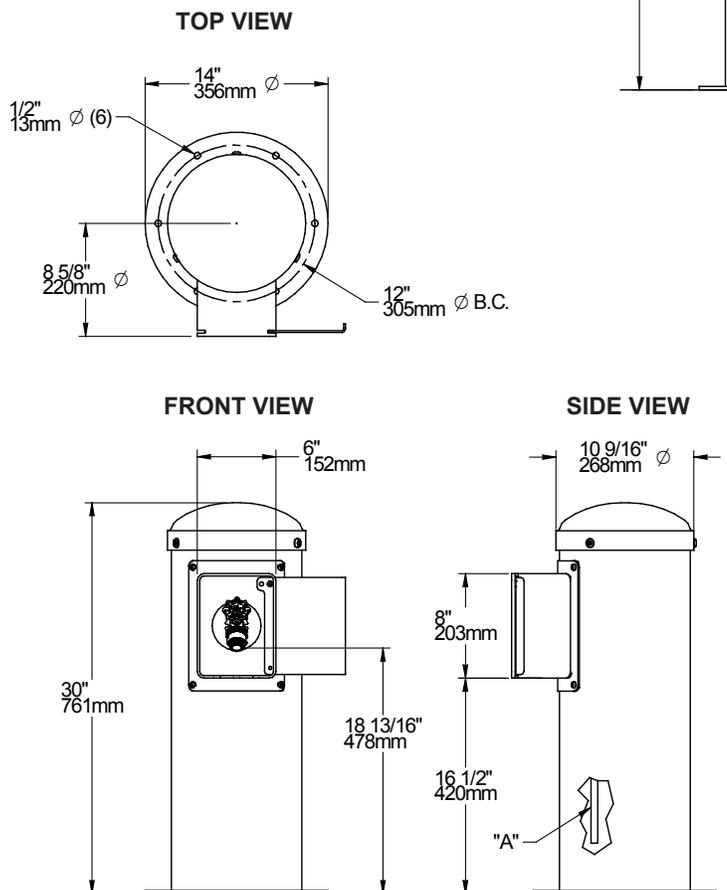

A = 1/2" O.D. UNPLATED COPPER TUBE CONNECT SHUT OFF VALVE BY OTHERS