


316 Stainless Steel Mini Ball Valves



1000 CWP 150 WSP Service
for 1/8" - 3/8"
800 CWP 150 WSP 1/2"
NSF/ANSI 61-8 and NSF/ANSI 372 Approved
for Potable Water Service
Suitable for Vacuum Service to 29.9" Hg
1/8" - 3/8" Full Port
1/2" Regular Port
Temperature Range: -20°F to 370°F
316 Stainless Steel One Piece Body
Blow Out Proof Stem
316 Stainless Steel Ball
PTFE Ball Seat and Viton® O-Ring
Double Ball Seats Allow Valve
to Be Operated in Either Direction
Zinc Wedge Handle
MPT x FPT Connection
ISO Registered Factory
MSS SP-110 Approved
RoHS Compliant

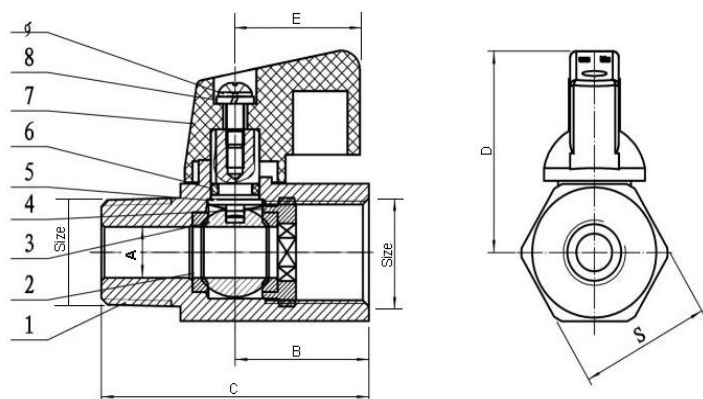

Part No.	Size	A (In)	B (In)	C (In)	D (In)	E (In)	S (In)	Cv	Wt. (lbs.)	Carton Qty
SSMM-18NL	1/8"	0.24	0.93	1.79	1.24	1.12	0.85	6.00	0.24	80
SSMM-25NL	1/4"	0.315	0.93	1.79	1.24	1.12	0.85	8.23	0.22	80
SSMM-38NL	3/8"	0.315	0.93	1.79	1.24	1.12	0.85	8.23	0.22	80
SSMM-50NL	1/2"	0.39	1.10	2.22	1.32	1.12	1.00	15.00	0.37	80

Weights Are $\pm 3\%$

Part No.	Description	Material
1	Body	S.S.316
2	Seat	PTFE
3	Ball	S.S.316
4	Cap	S.S.316
5	Stem	S.S.316
6	Stem Seal	Viton®
7	Handle	Zinc Cast
8	Washer	304 S.S.
9	Screw	304 S.S.

Drawing Date: 11/2014
Rev. Level-Date: R4 12/2021



WARNING: This product can expose you to chemicals, including Hexavalent Chromium, which is known to the State of California to cause cancer and reproductive harm.
For more information go to www.P65Warnings.CA.gov