

Features

- Brass valve bodies.
- Quarter-turn washerless ceramic disc valves.
- Less drain.
- Standard aerator.
- Variety of handle style options.
- 5-1/4" (133 mm) gooseneck spout.
- For 8" (203 mm) or 16" (406 mm) centers.
- 0.5 gal/min (1.9 l/min) maximum flow rate [max at 60 psi (4.14 bar)].

Material

- Brass construction.

Required Accessories

- K-16012-2 Standard Handles for Widespread Base Faucet
or
K-16012-3 Cross Handles for Widespread Base Faucet
or
K-16012-4 Lever Handles for Widespread Base Faucet
or
K-16012-5 Wristblade Handles for Widespread Base Faucet

Optional Accessories

- 1160595 .35 gpm Aerator, Medium



Codes/Standards

ASME A112.18.1/CSA B125.1
NSF 61
NSF 372
All applicable US Federal and State material regulations
DOE - Energy Policy Act 1992
California Energy Commission (CEC)


KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome

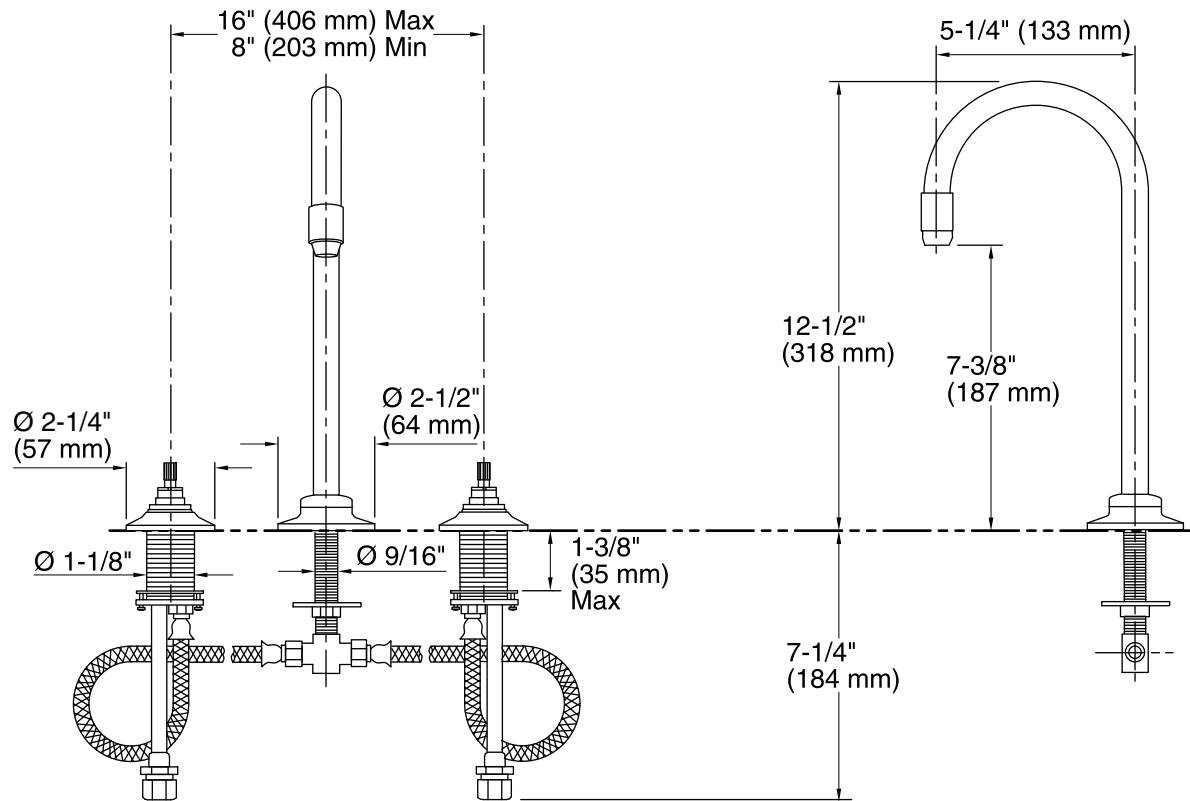

Technical Information

All product dimensions are nominal.

Spout:

Spout reach: 5-1/4" (133 mm)

Faucet:

Flow rate: 0.5 gal/min (1.9 l/min)

Pressure: 60 psi (4.1 bar)

Notes

Install this product according to the installation guide.