

TRENCH DRAIN GRATE

» 865 SERIES

FastTrack™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief 865 Series stainless steel slotted grating shall be used where necessary with FastTrack trench drain channels. Grating shall be corrosion resistant and approved for use in high-traffic, light-duty areas for pedestrian, bicycle and two-wheeled hand cart applications. Grating shall have large, open slots for increased flow capacity into channel and fasten to anchors with screws.

ADA: No

Heel-Proof: No*

Load Rating:

DIN EN 1433: Class A15

ASME A112.6.3: Light Duty

MATERIALS

Grate: 304 Stainless steel - 16 gauge

Screws: Stainless steel


FREE-AREA

60.0 in²

DIMENSIONS

A: Length	36"
B: Width	6"
C: Thickness	3/4"
D: Slot length	5"
E: Slot opening	7/16"

* Per ASME A112.6.3 requirements

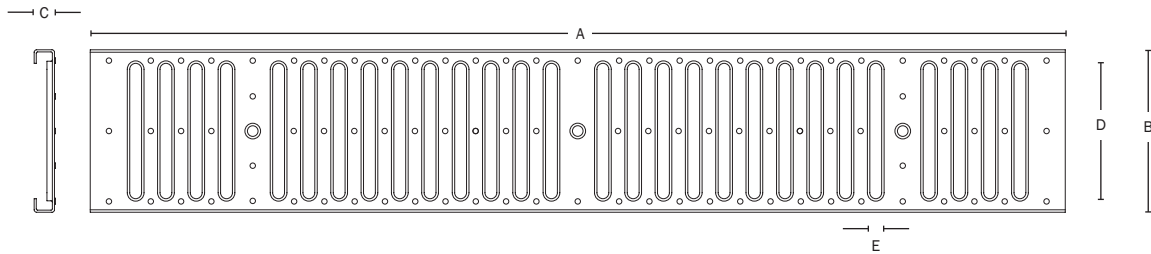

Item Number

865-GSS