

DESCRIPTION

- Brass construction with chrome plated finish
- 4" centerset
- 1/2" IPS connections
- Vandal resistant aerator

OPERATION

- 2-1/2" lever style handles with hot and cold color indicators*
- *Smooth handle models have hot and cold color indicator at torx head screw
- Vandal resistant torx head screws


FLOW

- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
 - 1.2 gpm max (4.5L/min) at 60 psi

CARTRIDGE


- Brass shell, ceramic disc cartridge
- 1/4 turn operation

STANDARDS

- Third party certified to WaterSense®, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking
- **ADA**  for lever handles

WARRANTY

- Warranted for five years against material or manufacturing defects

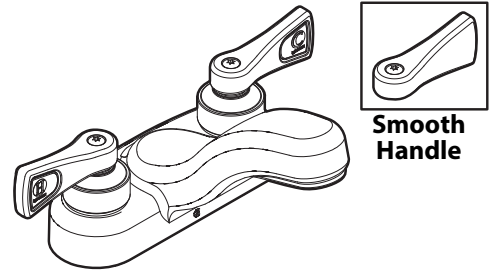


Two-Handle Lavatory Faucet

| MODEL | FLOW (gpm/Lpm) | DRAIN | HANDLE STYLE | WATERSENSE CERTIFIED |
|-----------|----------------|---------|--------------|----------------------|
| 8210F12 | 1.2 | Without | Decal | X |
| 8210SMF12 | 1.2 | Without | Decal | X |



NOTE: Designed to be installed through 2 holes - 1" (25mm) min. dia.

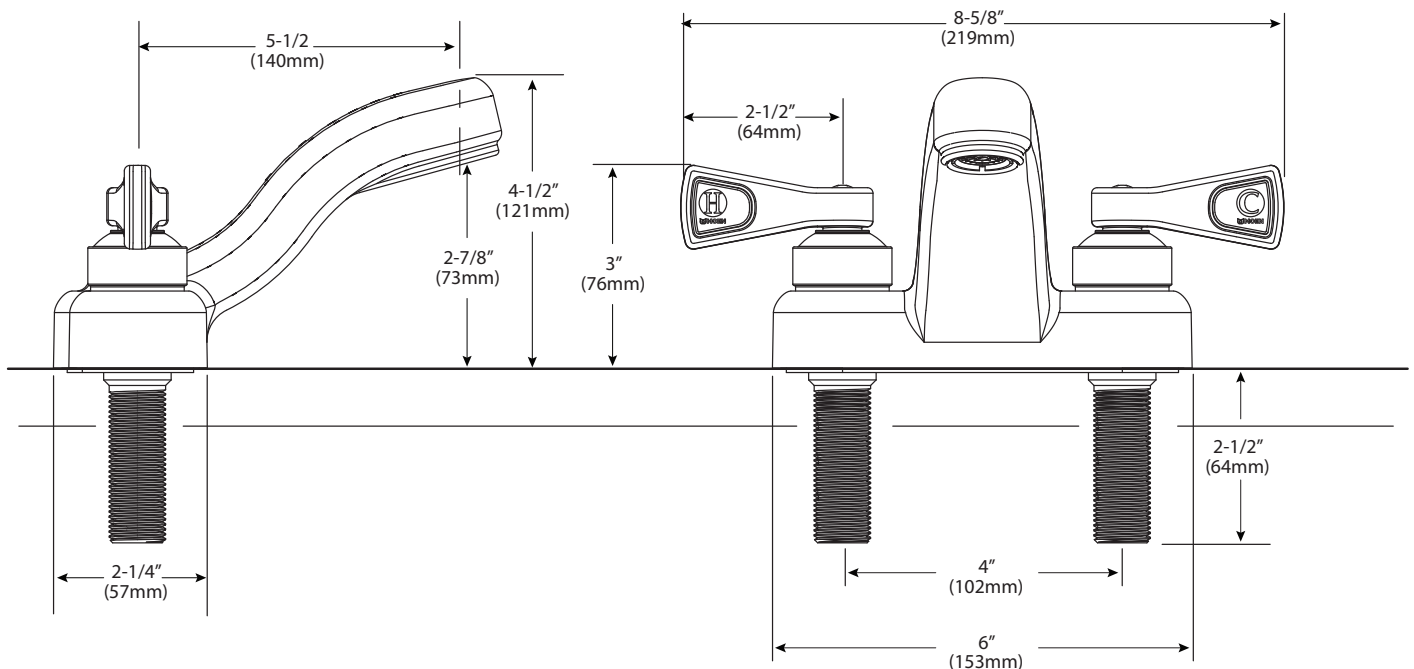

CRITICAL DIMENSIONS

(DO NOT SCALE)