



Buy it for looks. Buy it for life.®

# Specifications

## FAUCET DESCRIPTION

- Metal construction with various finishes identified by suffix
- Spot Resist™ finish available
- Power clean spray
- Duralock™ quick connect installation
- Pullout spray with 68" braided hose
- Flexible supplies with 3/8" compression fittings

## OPERATION

- Lever style handle
- Temperature controlled by 120° arc of handle travel
- Spout rotation is 120°
- Operates with less than 5lbs. of force
- Operates in stream, pause or spray mode in the pullout or retracted position

## FLOW

- Aerator is limited to 1.5 gpm (5.7 L/min) max.

## CARTRIDGE

- 1255™ Duralast™ cartridge for single-handle faucets
- Engineered polymers, nonferrous and stainless steel materials

## STANDARDS


- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- Third party certified to IAPMO Green ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements

- **ADA**  for lever handle

- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

## WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

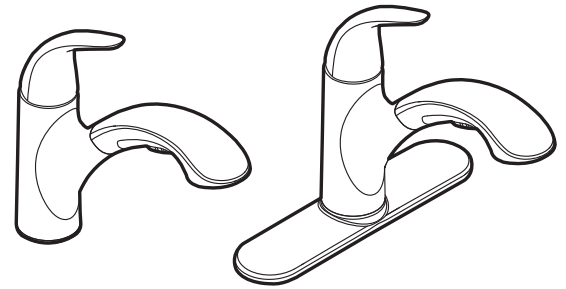

## Medina™ Single-Handle Kitchen Pullout Faucet

**Models:** 87039 SERIES

**NOTE:** DESIGNED TO INSTALL  
THRU 1 OR 3 HOLES 1-1/2" (38mm) DIA.

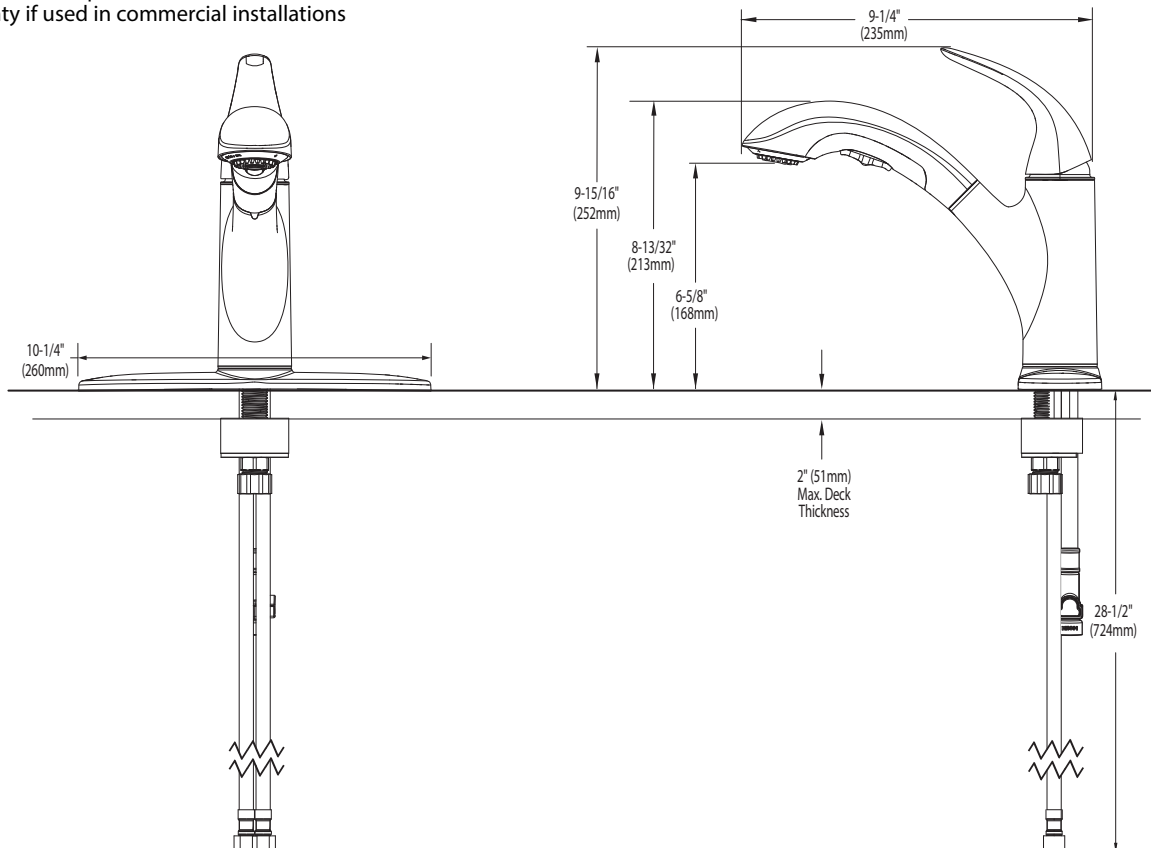

## CRITICAL DIMENSIONS

(DO NOT SCALE)