MOEN

Buy it for looks. Buy it for life.®

Specifications

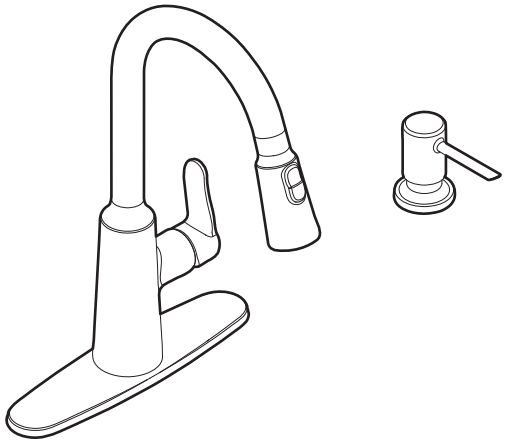

Edwyn™ Single Handle Pulldown Kitchen Faucet

Model: 87028 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1, 2, 3 and 4 HOLE, 1-1/2" (38mm) MIN. DIA.

(1 HOLE FOR SOAP DISPENSER)

DESCRIPTION
- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- Metal construction with various finishes identified by suffix
- Duralock® quick connect installation
- PowerClean Spray
- Flexible supply lines with 3/8"CC fittings connect directly to supply stop
- High arc spout provides height and reach to fill or clean large pots while pull out wand provides the maneuverability for cleaning or rinsing
- 360˚ rotating spout

OPERATION
- Lever style handle
- Temperature controlled by 100˚ arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position

FLOW
- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

CARTRIDGE
- 1255™ Duralast™ cartridge for Single-Handle Faucets

STANDARDS
- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two inde pendently operating check valves, a primary and a secondary which prevent backflow
- ADA for lever handle

WARRANTY
- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

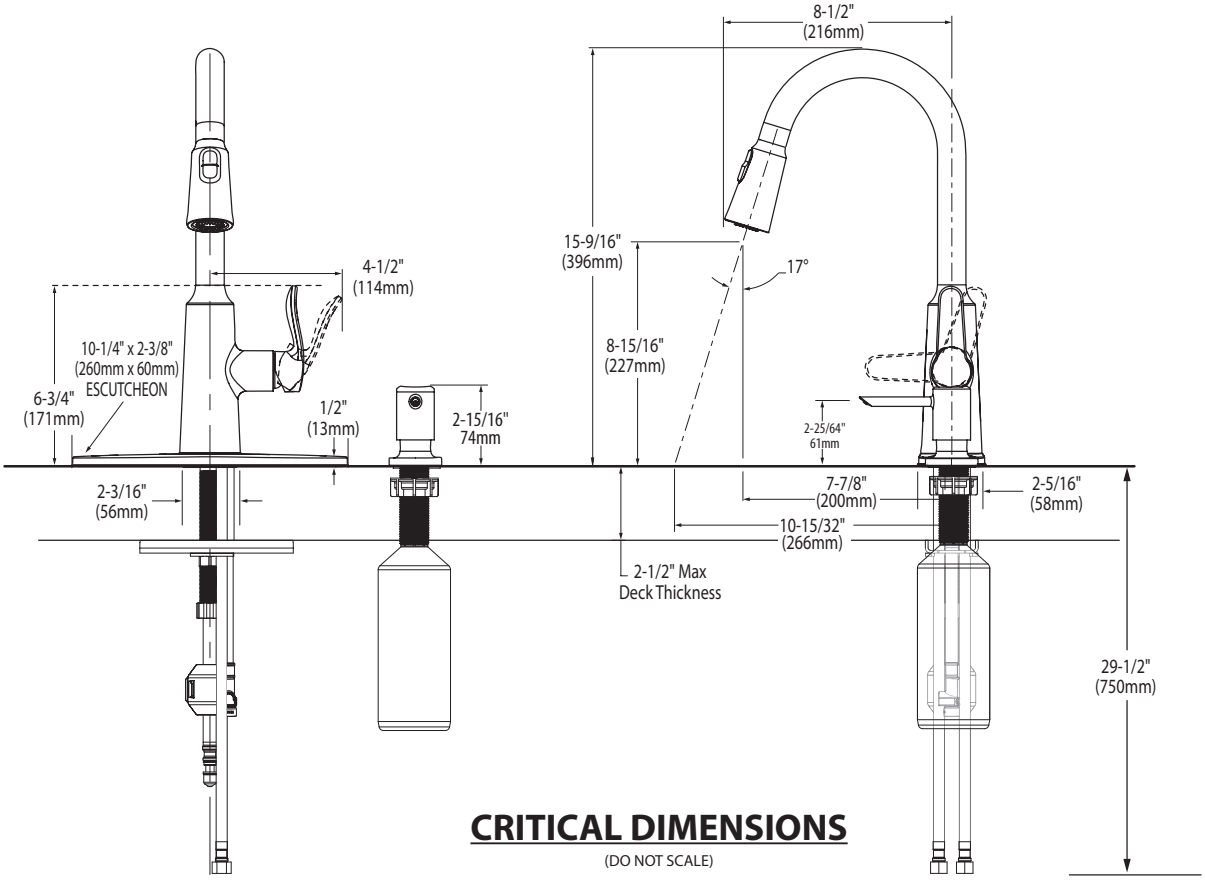

CRITICAL DIMENSIONS

(DO NOT SCALE)

Rev. 5/16

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

10/05/2016 SPC-1-047 5000023166
Released 01