


# SPECIFICATION SHEET



## SINGLE HANDLE PRESSURE BALANCE TUB AND SHOWER VALVE ONLY



# P-2300B SHOWN

Model #:

Specific Features:

Project Name:

Submitted For:


Date:

- Combo CXC and IPS Inlet and Outlet Connections
- Pressure Balance Spool Included
- Brass Inlet Stops
- Ceramic Disc Cartridge With Temperature Limit Stop
- Back to Back Installation



Model #	Features	Finish	
P-2300B		CP	
P-2300B-B	Builder Tract Pack	CP	

P-2300B Flow Rate (GPM) Vs Pressure (PSI) For Tub Port\*


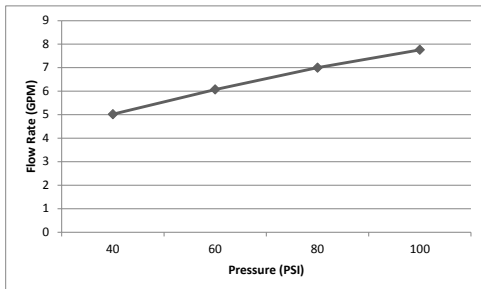


\*Note:- This information is provided for reference only. Actual Flow Rate may vary depending on installation and inlet pressures.


Olympia products are engineered and manufactured to meet the following standards and codes:

ASME A112.18.1  
IAPMO LISTED

**Note:-** Valve can be tested When Cartridge installed with air (100 PSI) or water (150 PSI) and when test cap (X-4400087 can be purchased separately) installed with air (200 PSI) or water (300 PSI).

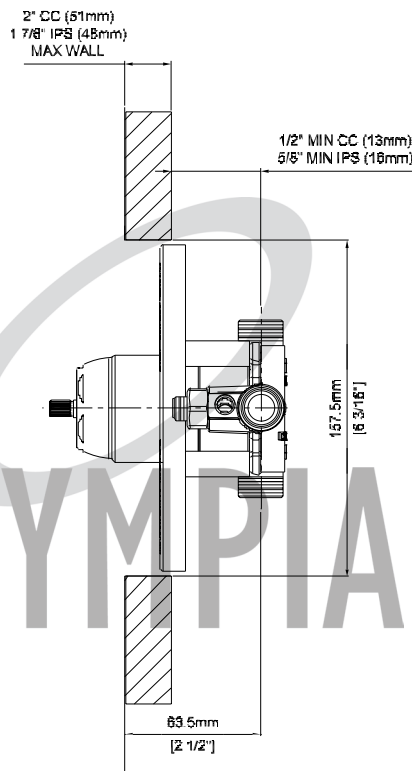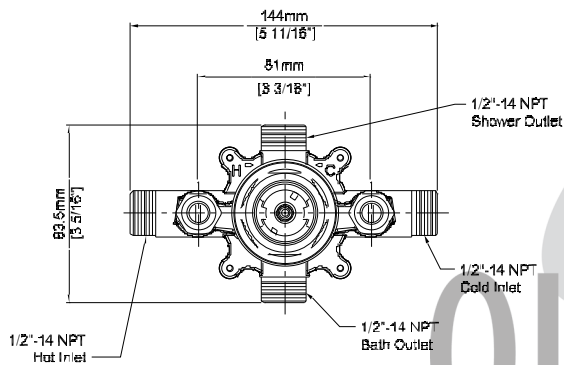

THICK WALL

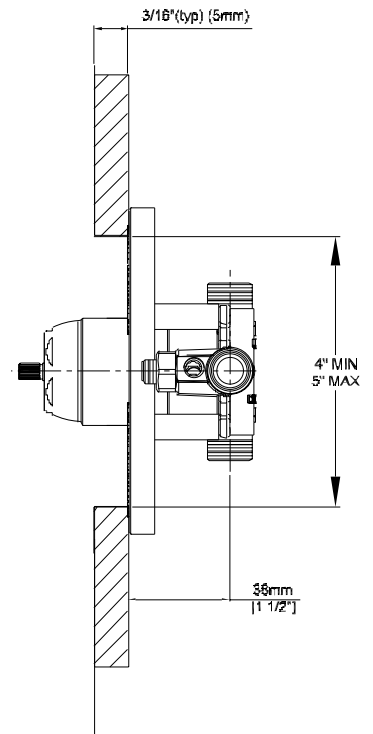

THIN WALL