



PFPCVC500HJ

PVC Sump Pump Swing Check Valve

Product Features

- Constructed from durable Type 1 PVC
- Weighted Buna-N flapper seal for low pressure seal
- Full flow design reduces flow loss
- Compression end connections for easy installation
- Includes 1-1/4" and 1-1/2" Buna-N compression gaskets for use with both 1-1/4" or 1-1/2" pipe.
- Can be installed vertically or horizontally
- Pressure rating: 125 PSI at 75° F (24° C)
- Conforms to ASTM D2466
- Not for use with compressed air, gases or potable water
- Maximum fluid temperature 140° F (60° C)

Product Codes

PFPCVC500HJ 1-1/4 1-1/2 PVC COMP SUMP CHK VLV

Dimensional Data

Model	PFPCVC500HJ	
Dimensions	In	mm
IPS Pipe Size	1-1/4" or 1-1/2"	38.1
Weight	.7 lbs.	.3 kg
A	2.88	73.2
B	2.18	55.4
C	5.73	145.5
D	2.95	75.0


Product Specifications

NO.	PART	MATERIAL	QTY
1	Compression Nut	PVC	2
2	Compression Gasket*	BUNA-N	4
3	Upper Body	PVC	1
4	Flapper Disc	PVC	1
5	Flapper Seat	BUNA-N	1
6	Lower Body	PVC	1

*Both 1-1/2" & 1-1/4" compression gaskets are included. 2 of each size.



PFPCVC500HJ

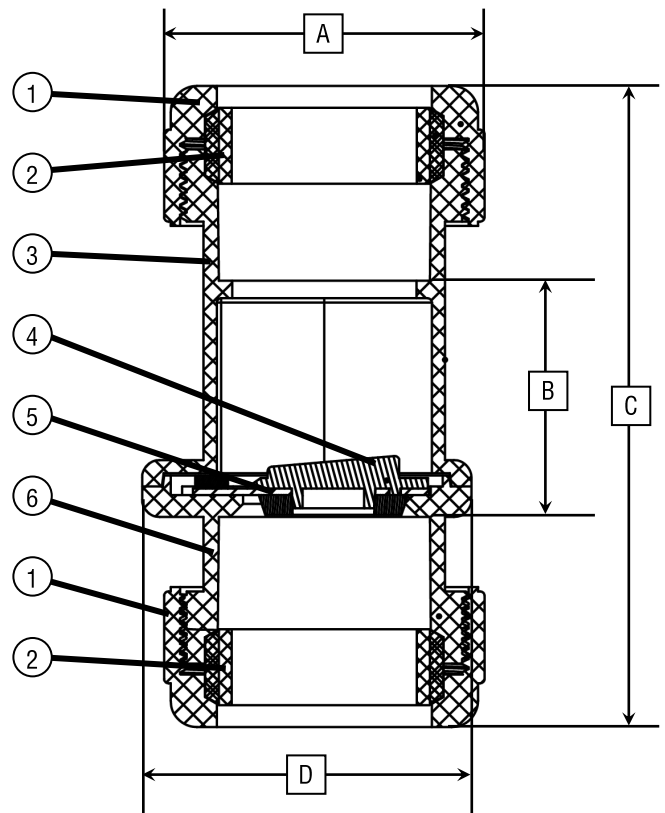

Warranty and Codes

This PROFLO product carries a 1-year limited warranty.