

Features


 Includes (3) 48"x96" wall panels and (2) color-matched corner joints.

Material

- Walls made from Serica[™] composite material.
- Durable, non-porous, 0.2" thick compression-molded walls that are easy to clean and resist chipping and cracking.

Installation

Trimmable to customize size and installation.







Codes/Standards

ASTM E162 ASTM E662 Greenguard UL 2818 - Gold

KOHLER[®] Limited Warranty – Choreograph[™] Walls and Accessories See website for detailed warranty information.


Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|------------------|------|-------------------------------|
| | 0 | White |
| | 96 | Biscuit |
| | 47 | Almond |
| | NY | Dune |
| | 95 | lce™ Grey |
| | G9 | Sandbar |
| | 7NY | Veincut Dune/Dune Combo |
| | 896 | Veincut Biscuit/Biscuit Combo |
| | 9G9 | Veincut Sandbar/Sandbar Combo |
| | W07 | Veincut in Dune |
| | W08 | Veincut in Biscuit |
| | W09 | Veincut in Sandbar |
| and and a second | W10 | Crosscut in Dune |
| The start | W11 | Crosscut in Biscuit |





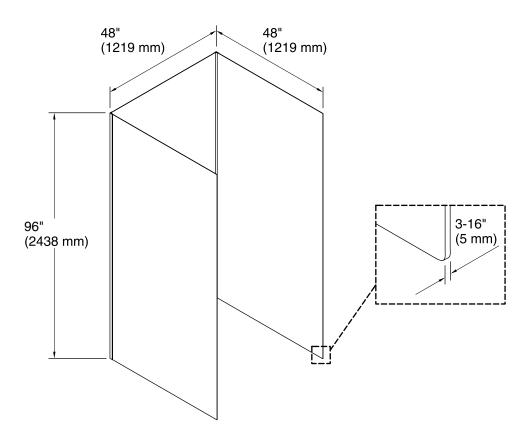

Technical Information

All product dimensions are nominal. Installation: 3-Wall Alcove

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

Use non-solvent based construction adhesive. For installation over tile, use 100% silicone sealant.

Corner joints allow for 3/8" (10 mm) adjustment for out-of-plumb conditions or uneven cuts.

If installing accessories, install 2x4 backing for handrails, shelves, and shower hooks, and 2x10 backing for the flip-down seat.

