



SPECIFICATION SHEET

16-150



G-TEK® POLYKOR™ BLENDED SHELL WITH POLYURETHANE COATED SMOOTH GRIP

- Seamless construction offers increased comfort and breathability
- PolyKor™ blended shell is lightweight and provides excellent dexterity, tactile sensitivity and cut resistance
- Polyurethane coated palm and fingertips for great abrasion resistance, excellent puncture resistance and outstanding wet/dry grip
- Knit Wrist helps prevent dirt and debris from entering the glove
- Washable, resistant to chemicals, water, and ultraviolet light
- This style is also available tri-folded and shrink-wrapped for carefree dispensing through vending machines (16-150V)

APPLICATIONS

- Electronics
- Glass cutting
- Sheet metal handling
- General duty
- Parts assembly
- Sharp small parts handling

CARE INSTRUCTIONS

Recommend washing gloves in slightly warm water not exceeding 40°C. A mild non-ionic detergent should be used. A 5-10 minute cycle time should be employed. Tumble dry on low - maximum temperature 140°F (60°C).

TECHNICAL DATA

MATERIAL	Shell: PolyKor™ / Coating: Polyurethane						
CONSTRUCTION	Seamless Knit						
COLOR	Shell: ■ Salt & Pepper / Coating: ■ Gray						
CUFF STYLE	Continuous knit						
SIZES	XS - XXXL						
PACKAGING	1 pair per polybag, 12 pairs per dozen, 6 dozen per case						
CASE	16.7" x 11.2" x 11.2" / 42.5cm x 28.5cm x 28.5cm						
CASE WEIGHT	XS	S	M	L	XL	XXL	XXXL
	7.7 lbs 3.5 kg	7.9 lbs 3.6 kg	8.4 lbs 3.8 kg	8.8 lbs 4.0 kg	9.5 lbs 4.3 kg	9.9 lbs 4.5 kg	11.0 lbs 5.0 kg
COO	China						



DIMENSIONS (in/cm)


	XS	S	M	L	XL	XXL	XXXL
A	7.5 / 19	8.3 / 21.0	9.1 / 23.0	9.4 / 24.0	9.8 / 25.0	10.0 / 25.3	10.6 / 27.0
B	3.3 / 8.5	3.5 / 9.0	3.7 / 9.3	3.9 / 10.0	4.1 / 10.3	4.1 / 10.5	4.3 / 10.8
H	■ Purple	■ Red	■ Yellow	■ Brown	■ Black	■ Blue	■ Gray

PERFORMANCE PROPERTIES

EN388: 4342	ASTM F2992-15 ANSI Cut Level A2 (Adopted by ANSI/ISEA 02/16) ASTM F1790-05 ANSI Cut Level 2					
ABRASION	0	1	2	3	4	-
CUT	0	1	2	3	4	-
TEAR	0	1	2	3	4	-
PUNCTURE	0	1	2	3	4	-

BARCODES

ITEM	BAG	DOZEN	CASE
■ 16-150/XS	616314168314	01616314168313	02616314168312
■ 16-150/S	616314168291	01616314168290	02616314168299
■ 16-150/M	616314168284	01616314168283	02616314168282
■ 16-150/L	616314168277	01616314168276	02616314168275
■ 16-150/XL	616314168307	01616314168306	02616314168305
■ 16-150/XXL	616314168321	01616314168320	02616314168329
■ 16-150/XXXL	616314168789	01616314168788	02616314168787

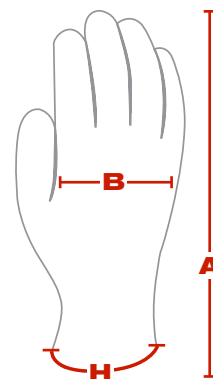

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.