



Rev. 1-15 Shaded area indicates changes

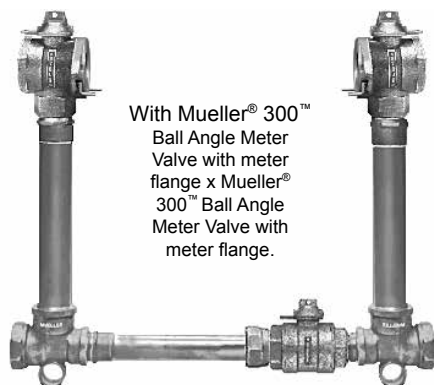

With Mueller® 300™ Ball Angle Meter Valve with meter flange x Mueller® 300™ Ball Angle Meter Valve with meter flange.

**B-2423N**


FIP end inlets and outlets

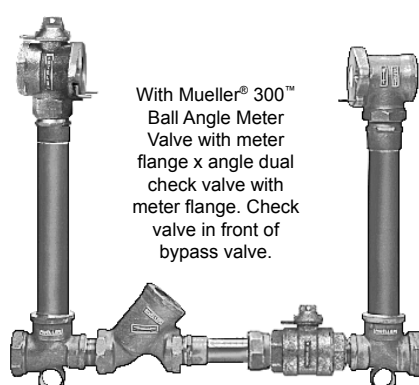

With Mueller® 300™ Ball Angle Meter Valve with meter flange x angle dual check valve with meter flange. Check valve in front of bypass valve.

**B-2423-2N**

FIP end inlets and outlets

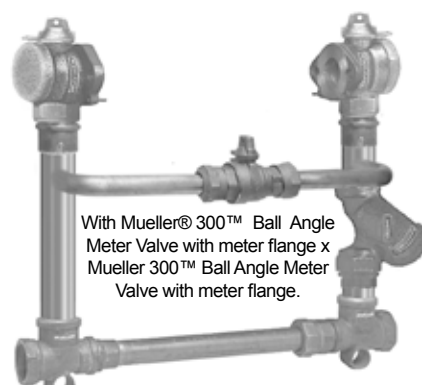

With Mueller® 300™ Ball Angle Meter Valve with meter flange x Mueller 300™ Ball Angle Meter Valve with meter flange.

**B-2423-2-99000N**



FIP end inlets and outlets

shown with check valve in optional location

**1-1/2" and 2" Copper meter setters (with by-pass)**

Catalog number	B-2423N	B-2423-2N/B-2423-2-01N*	B2423-99000N/B-2423-2-99000N
Description	With lock Mueller® 300™ Ball Angle Meter Valve with meter flange x lock wing ball angle meter valve with meter flange. By-pass with lock wing Mueller® Ball Valve	With lock Mueller® 300™ Ball Angle Meter Valve with meter flange x angle dual check valve with meter flange. By-pass with lock wing Mueller® Ball Valve and check valve (without by-pass check valve: B-1423-2-01).	With lock Mueller® 300™ Ball Angle Meter Valve with meter flange x lock wing ball valve with meter flange. Elevated by-pass with Mueller® Ball Valve with locking device (with check valve: B-1423-2-99000).

\*For ASSE Approved canister dual check - add 6A for regular or 6D for drain

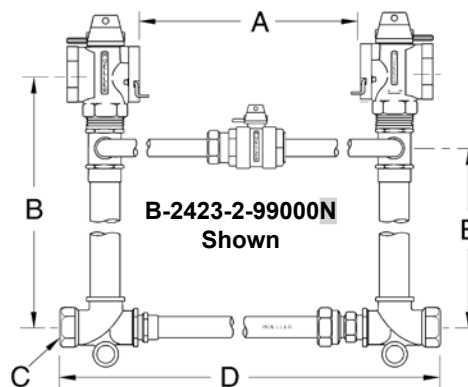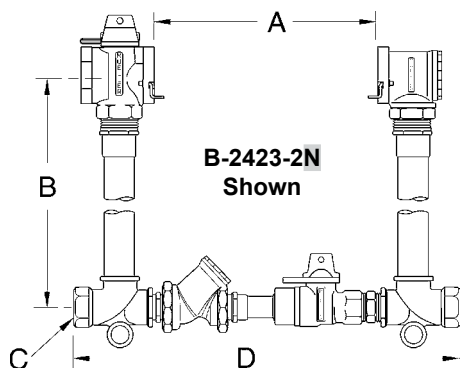**Dimensions**

Meter Sizes	1-1/2" B-2423N, B-2423-2N, and B-2423-2-01N	2" B-2423N, B-2423-2N, and B-2423-2-01N	1-1/2" B-2423-99000N and B-2423-2-99000N	2" B-2423-99000N and B-2423-2-99000N
A*	13.25"	17.25"	13.25"	17.25"
B - riser height	12", 15", 18", 21", 24", and 27"	12", 15", 18", 21", 24", and 27"	18", 21", 24", and 27"	18", 21", 24", and 27"
C - nominal pipe size of inlet and outlet	1-1/2"	2"	1-1/2"	2"
D*	21.50"	26.63"	21.50"	26.63"
E	-	-	7.25"	7.25"

\*Adjustable dimension. Copper tubing in the tie bar can be cut to accommodate shorter meters. Adjustment affects both A and D dimensions.

See section 6 for end connections that can be used with these yokes.

**SPECIFY METER SIZE, RISER HEIGHT AND CATALOG NUMBER**

Mueller Copper Meter Yokes are manufactured and tested in accordance with ANSI/AWWA C800. Components in contact with potable water will also comply with latest requirements of the Federal Safe Drinking Water Act.