

# Quick Reference Guide



## Foundation™ 3 to 5 Tons Packaged Rooftop Units Cooling & Gas/Electric

**Table 1. Model number description**

EBC	Packaged Cooling, Electric Heat (Optional)
GBC	Packaged Cooling, Gas Heat

May 2017

RT-PRC083B-EN  
© 2017 Ingersoll Rand



1

### List of Options

**Note:** Most Factory Installed Options are available for downflow air discharge units only. Verify with ordering system for availability.

**Table 1. List of options**

Factory Installed Options	Field Installed Options
Barometric Relief <sup>(a)</sup> (Downflow Low Leak Economizer Only)	Barometric Relief (Standard and Low Leak Economizer, Downflow and Horizontal Configuration)
Complete Coat™ Microchannel Condenser Coil	Crankcase Heater
Condensate Overflow Switch	Demand Control Ventilation with CO2 Sensor
Economizer (Downflow) <sup>(a)</sup>	Economizer (Horizontal)
Electric Heaters	Frostat™
Low Leak Economizer - Downflow	Low Ambient Kit
Manual Outside Air Dampers	Low Leak Economizer - Horizontal
Motorized Outside Air Dampers	LP Conversion Kit
Oversized Motor	Powered Exhaust
Reference or Comparative Enthalpy Economizer	Remote Potentiometer
Stainless Steel Heat Exchanger with 10 Year Warranty	Roof Curb
Through the Base Electrical Access	Thermostat
Through the Base Gas Piping	Tool-less Hail Guard
Unit Mounted Non-Fused Disconnect Switch <sup>(b)</sup>	

(a) Some field set up required.

(b) Must be ordered with Through-the-Base Electrical option.

2

**Table 2. 3-5 ton packaged rooftop performance data (gas or electric heat)**

Nominal Size (Ton)	3	4	5
<b>Cooling Performance<sup>(a)</sup></b>			
Gross Cooling Capacity	37,000	49,600	59,000
AHRI Net Cooling Capacity	36,000	48,000	57,500
Nominal Airflow CFM / ARI Rated CFM	1200/1200	1600/1600	2000/1600
EER <sup>(b)</sup>	12	12	12
Seasonal Energy Efficiency Ratio (SEER) <sup>(c)</sup>	14	14	14
<b>Gas Heating Performance</b>			
Low Heat (Input/Output) - (Btu/h)	72,000/ 57,600	72,000/ 57,600	72,000/ 57,600
Medium Heat (Input/Output) - (Btu/h)	100,000/ 80,000	115,000/ 92,000	115,000/ 92,000
<b>Other Information</b>			
Net Weight (Lbs) - Gas Heat	524	566	586
Net Weight (Lbs) - Electric Heat	473	516	536
Filters - Type Furnished	Throwaway	Throwaway	Throwaway
Number & Size Recommended	(4) 16x16x2	(4) 16x16x2	(4) 16x16x2

(a) Cooling Performance is rated at 95°F ambient, 80°F entering dry bulb, 67°F entering wet bulb.

(b) EER is rated at AHRI conditions and in accordance with AHRI standard 210/240.

(c) Seasonal Energy Efficiency Ratio (SEER) is rated in accordance with AHRI standard 210/240 and DOE test procedures.

3

**Table 3. Unit MCA & MOP electrical data (standard indoor fan motor - cooling or gas heat)**

E/GBC	Volts	MCA <sup>(a)</sup>	MOP
<b>036</b>	208-230	19.5	25
	460	10.5	15
	575	6.8	15
	380 <sup>(b)</sup>	10	15
<b>048</b>	208-230	23.6	35
	460	11	15
	575	8.1	15
	380 <sup>(b)</sup>	13	20
<b>060</b>	208-230	26.4	40
	460	12.9	20
	575	9.2	15
	380 <sup>(b)</sup>	13.6	20

(a) Values do not include Power Exhaust accessory.

(b) Unit will operate reliably at 400VAC.

**Table 4. Unit indoor fan data**


E/GBC	Volts	Standard (HP - RPM)	Oversized (HP - RPM)
<b>036</b>	208-230		
	460	1 - 1725	2 - 1725
	575		
	380 <sup>(a)</sup>		
<b>048</b>	208-230		
	460	1 - 1725	2 - 1725
	575		
	380 <sup>(a)</sup>		
<b>060</b>	208-230		
	460	1 - 1725	2 - 1725
	575		
	380 <sup>(a)</sup>		

(a) Unit will operate reliably at 400VAC.

**Table 5. Unit dimensional data**

	3-5 Ton
Unit Length UL	76.814"
Unit Width UW	47.934"
Unit Height UH	42.004"
Curb Length CL	70.871"
Curb Width CW	41.983"
Supply Length SL <sup>(a)</sup>	21.060"
Supply Width SW <sup>(a)</sup>	14"
Return Length RL <sup>(a)</sup>	32.188"
Return Width RW <sup>(a)</sup>	14.430"

(a) Dimensions are for curb openings and not duct inserts.  
Reference the product catalog for duct insert dimensions.

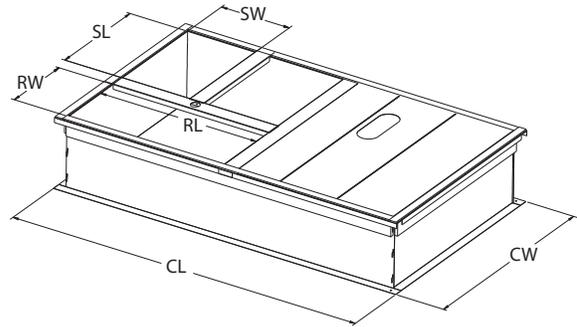

Ingersoll Rand (NYSE:IR) advances the quality of life by creating comfortable, sustainable and efficient environments. Our people and our family of brands—including Club Car®, Ingersoll Rand®, Thermo King® and Trane®—work together to enhance the quality and comfort of air in homes and buildings; transport and protect food and perishables; and increase industrial productivity and efficiency. We are a global business committed to a world of sustainable progress and enduring results.



[ingersollrand.com](http://ingersollrand.com)

Ingersoll Rand has a policy of continuous product and product data improvement and reserves the right to change design and specifications without notice.  
We are committed to using environmentally conscious print practices.