

# Safe & Efficient Transition Hose that's Easy to Install



## Flexible & Safe

DryerFlex™ combines the ease of use and flexibility of foil flex with the fire resistance and airflow efficiency of semi-rigid.

## Benefits

- Makes Connecting the Dryer Much Simpler
- Helps Protect Against Dangerous Kinks
- Resists Flame Spread (UL Tested)
- Maximizes Airflow Efficiency





UL2158A  
Listed

## Features

- UL2158A Class 0 Listed (0 Flame Spread and 0 Smoke)
- Crush and Puncture Resistant 100% Aluminum
- Operating Temperature: -22° — 482° F (Tested to 662° F)
- Internal Diameter 4" Whether Compressed or Extended

*"DryerFlex dryer transition duct is a cross between foil and semi-rigid aluminum, but it outperforms both of those materials in every way possible. We feel it's a far better transition duct than anything that's available at home improvement stores."*

– Reuben Salzman, ASHI Certified Inspector

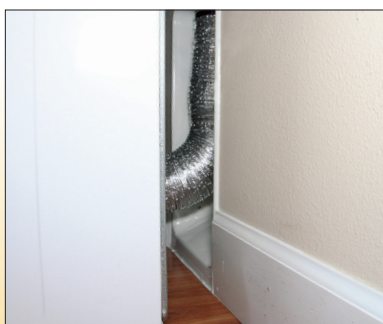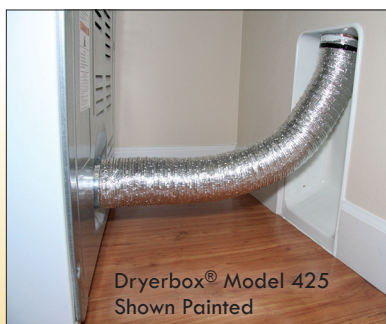

Extends and compresses smoothly while maintaining 4" inner diameter.

## A Better Clothes Dryer Transition Duct

Multiple layers of pure aluminum ribbon attached over hot galvanized zinc coated wire give DryerFlex its strength and flexibility while maintaining fire resistance. Ribbon is tightly wound with a maximum material thickness between wire coils so the interior is smoother which reduces airflow resistance.

DryerFlex: safe, efficient and easy to install.

## Aluminum Dryer Duct



Fire Resistant  
Flexible Hose



Model	Length
DFLX4	4-Feet (48")
DFLX8	8-Feet (96")




800-803-2537

250 South Central Boulevard • Suite 207 • Jupiter FL 33458-8812 • Fax: 561-745-9723

[www.DryerFlex.com](http://www.DryerFlex.com)



# Technical Product Specifications

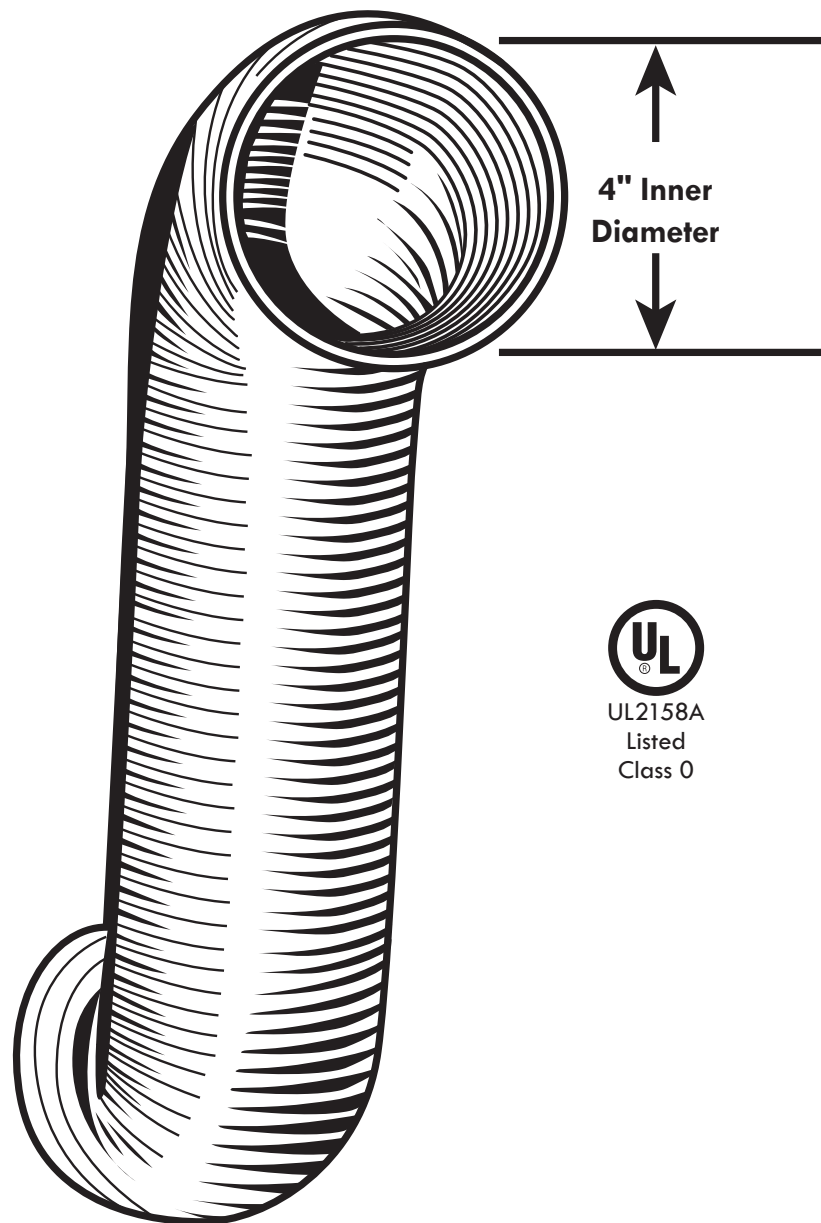

UL2158A  
Listed  
Class 0

Model	Applications
DFLX4	Building code/manufacture approved 4" dryer transition duct 4' length
DFLX8	Building code/manufacture approved 4" dryer transition duct 8' length
Performance Data	
<b>For Use:</b> <ul style="list-style-type: none"><li>• Dryer Exhaust Transition Hose</li><li>• Complies with IMC 504.4 &amp; IRC 1502.3</li><li>• UL 2158A Class 0 Listed</li></ul> <b>Material:</b> <ul style="list-style-type: none"><li>• 5 layers of 25 micron 100% aluminum ribbon attached over galvanized zinc coated wire.</li></ul> <b>Carton Weight</b> Model DFLX4: 29 lbs. / 36 Units per Carton Model DFLX8: 29 lbs. / 18 Units per Carton Model DFLX25: 20lbs / 4 Units per Carton	
General Information	
<b>Benefits:</b> <ul style="list-style-type: none"><li>• Simplifies connection of the dryer</li><li>• Helps protect against crushing</li><li>• Helps protect against flame spread</li><li>• Eliminates the need for a close elbow</li><li>• Improves efficiency shortens cycles, saves energy</li></ul> <b>Features:</b> <ul style="list-style-type: none"><li>• Maintains 4" Dia. Compressed or Extended</li><li>• Operating Temp: -22° — 482° (Tested to 662° F)</li><li>• Flame Spread: 0 / Smoke Developed: 0</li><li>• Crush &amp; Puncture Resistant 100% Aluminum</li></ul>	
Manufactured By	
<b>InOvate Technologies, Inc.</b> 250 S. Central Blvd. Suite 20 Jupiter, FL 33458 Telephone: 561-744-0473 Facsimile: 561-745-9723 <a href="http://www.DryerFlex.com">www.DryerFlex.com</a>	