

SPECIFICATIONS

FIGURE 7899MM COUPLING




METRIC INSULATION COUPLING

Insulation couplings for metric pipe

FEATURES

- UL Classified 2043 (25/50) for use in plenums and air handling systems
- Superior vapor barrier at suspension points
- Three times faster installation of fiberglass insulation than traditional methods
- Dramatically improved finished appearance of insulated tubing
- All metal components have a Trivalent (non-hex) plating
- Available in 304 and 316 stainless steel
- Available in metric sizes from 25mm to 110mm
- Insulation wall thickness sizes from 1" up to 1-1/2"
- Molded with high-strength Thermoplastic Olefin (TPO)
- Temperature rating: -60° F to +225° F

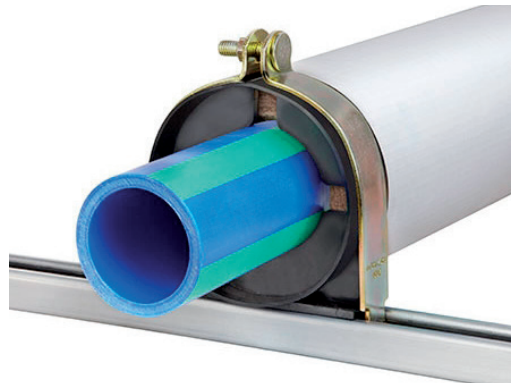

MADE IN THE
USA

PRODUCT SPECIFICATIONS

- Weld stud 5/16-18" x 1.25"
- 1" Wall thickness

a – Strut Mounted Coupling for 1" Wall Insulation

Catalog Number	b – Clamp ID	C
	Tube OD	in.
FNW7899GMM25	25mm	3.008
FNW7899GMM32	32mm	3.638
FNW7899GMM40	40mm	3.638
FNW7899GMM50	50mm	4.138
FNW7899GMM63	63mm	4.638
FNW7899GMM75	75mm	5.138
FNW7899GMM90	90mm	5.750

a – Strut Mounted Coupling for 1-1/2" Wall Insulation

Catalog Number	b – Clamp ID	C
	Tube OD	in.
FNW7899JMM25	25mm	4.130
FNW7899JMM32	32mm	4.630
FNW7899JMM40	40mm	5.140
FNW7899JMM50	50mm	5.140
FNW7899JMM63	63mm	5.690
FNW7899JMM75	75mm	6.870
FNW7899JMM90	90mm	6.870

