# **MOEN**<sup>®</sup>

### **DESCRIPTION**

- One piece, cast brass construction above-deck with various finishes identified by suffix
- Modern Style matches M•Power<sup>™</sup> lav (model 8559)
- Single mount
- Easily refillable 1500mL foam soap reservoir included
- Works with all commercial, non-pumice foam soaps (purchased separately)
- · Vandal resistant below-deck box with included mounting hardware
- Do not install or operate at temperatures below 32°F (0°C)

#### **OPERATION**

- "Touch free" operation for improved hygiene
- Adjustable sensor activation distance
- One ~1mL dispense per activation
- Maintenance/Cleaning Mode: Allows for a 30 second deactivation for maintenance or cleaning
- Low battery, low soap, and service indicator LED's
- (4) D batteries (included) with AC compatibility
- For AC connection: Transformer 104630 required for up to 8 devices, and 182538 connector for each device
- Battery life: 1 year or 50,000 cycles

### **STANDARDS**

- Meets the current requirements of the Buy American Act (BAA)
- ADA compliant
- · Third party certified to meet FCC part 15

### **WARRANTY**

• Warranted for 5 years against material or manufacturer defects

### **NOTES**

- Caution: Do not kink Soap Tube
- Ensure Pump Assembly is centered under Spout
- Soap may take up to approximately 20 dispense cycles to switch from liquid to foam form after installation.
- Soap dispenser may not operate with sinks that protrude above the deck mounting surface. Consult the Exploded Parts View for spacers that may be used in some of these installations.

### **Specifications**



M•Power™ Align® Style Electronic Soap Dispenser

**Models: 8560** 

**NOTE**: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1" MIN. DIA.



Refer to back for dimensions


Rev. 6/21

www.moen.com

# **MOEN**<sup>®</sup>

## **Specifications**

There is more than one version of this model. Page down to identify the version you have.

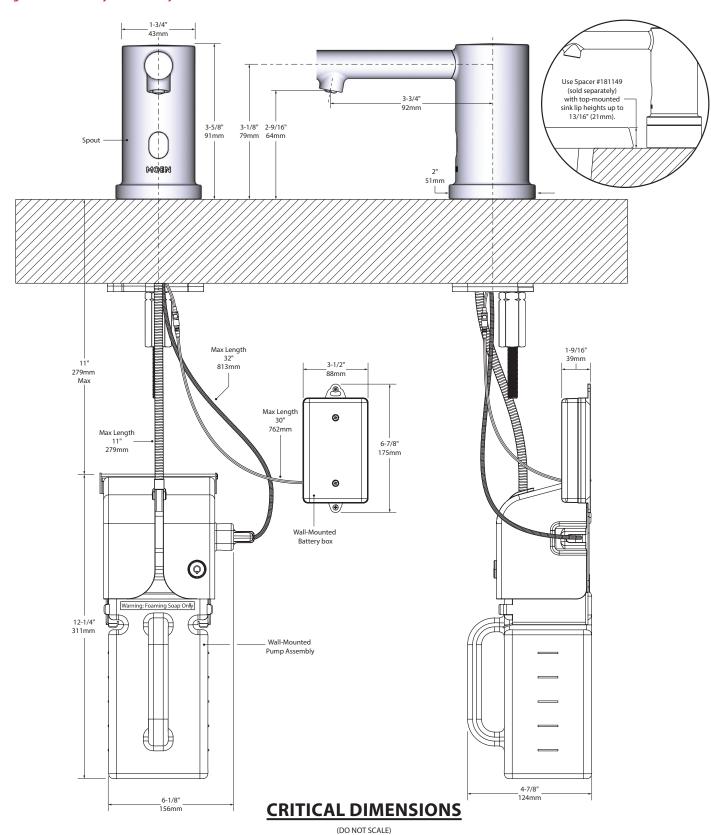

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

# **MOEN**<sup>®</sup>

## **Specifications**

