

# MBMG2C

MB Mini Vertical Round Accent with Canopy - Gen 2

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

## ELECTRICAL DATA

LED Light Engine	System Wattage *	CCT / CRI	Nominal Delivered Lumens **
L1	10W	3000K / 82 CRI	1100lm
L2	14W	3000K / 82 CRI	1500lm
L3	20W	3000K / 82 CRI	2000lm
L4	29W	3000K / 82 CRI	2600lm

\* System Wattage include driver and LED Module consumption

\*\* Delivered lumen output will vary depending on CCT, CRI and optic

## LED LIGHT ENGINE

- 92 CRI & 82 CRI in 2700K, 3000K, 3500K and 4100K with 2 SDCM binning
- LED mounted to die-cast / extruded aluminum heat sink
- 50,000 hours average rated life at 70% output

## OPTICS

- 16° Spot, 24° Narrow Flood, 32° Flood, and 50° Wide Flood

## ELECTRICAL SYSTEM

- 120V-277V 50/60Hz input
- Class 2 power supply
- Over voltage, over current and short circuit protection: Auto recovery
- This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Additional surge protection recommended. Damage from power surge is not covered by warranty.
- Multiple dimming options available

## DIMMING

- (ELV) reverse phase control dimmers. 120V only.
- 0-10V dimming available in 120V-277V

## MOUNTING

Mounts to a standard 4" square or octagon junction box

## ACCESSORIES



Luminaire will accommodate (2) accessories, no accessory holder is required.

## LISTING/WARRANTY

- ETL Listed to US and Canadian standards for dry locations
- 5-Year Intense LED Limited Warranty
- ENERGY STAR® Qualified<sup>4</sup>



MB

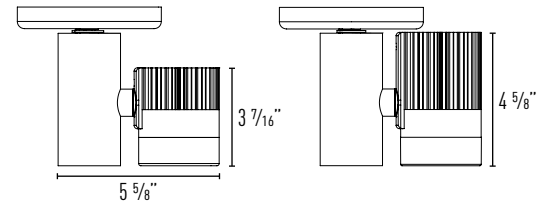

MBMG2CL1 / MBMG2CL2

MBMG2CL3 / MBMG2CL4

Horizontal Adjustability: 358°

Vertical Adjustability: 258°

Luminaire Part Number (Example: MBMG2L430W-24)

Luminaire	Wattage	CCT / CRI	Driver	Finish	Beam Spread
MBMG2C	L1 (10 Watts)	27 (2700K / 82 CRI)	blank (Non-Dimming 120V-277V)	W (White)	-16 (16° Spot)
	L2 (14 Watts)	279 (2700K / 92 CRI)	-D10 (0-10V Dimming 120V-277V)	B (Black)	-24 (24° Narrow Flood)
	L3 <sup>1</sup> (20 Watts)	30 (3000K / 82 CRI)	-DELV (ELV Dimming 120V)	SV (Silver)	-32 (32° Flood)
	L4 <sup>1</sup> (29 Watts)	309 (3000K / 92 CRI)			-50 (50° Wide Flood)
		35 (3500K / 82 CRI)			
		359 <sup>2</sup> (3500K / 92 CRI)			
		41 (4100K / 82 CRI)			
		419 <sup>2</sup> (4100K / 92 CRI)			

## Filters for 16° optic

- PFL-CL1-S16 (Prismatic Spread Lens)
- PFL-CL2-S16 (Linear Spread Lens)
- PFL-CL4-S16 (Soft Focus Lens)

## Louver & Snoot for 16° optic

- PFLMB-16 (Hex Louver)
- SNTR16 (Black Snoot)
- SNTR16W<sup>3</sup> (White Snoot)

## Filters for 24°, 32° & 50° optic

- PFL-CL1-S (Prismatic Spread Lens)
- PFL-CL2-S (Linear Spread Lens)
- PFL-CL4-S (Soft Focus Lens)

## Louver & Snoot for 24°, 32° & 50° optic

- PFLMB (Hex Louver)
- SNTR (Black Snoot)
- SNTRW<sup>3</sup> (White Snoot)

### Notes:

- L3 & L4 include larger heat sink
- Consult factory for lead times
- White exterior, black interior
- ENERGY STAR® Qualified (Excludes: 92 CRI Options)

TRACK\_LIGHTING-MB L/M-022718 P-1

INTENSE LIGHTING | 3340 E La Palma Ave, Anaheim, CA 92806 | tel 714 630-9877 | fax 714 630-9883

For Intense Lighting's limited product warranty, go to [www.intenselighting.com](http://www.intenselighting.com). For a printed copy of the warranty, you may call 800 961-5321.

© 2018 Intense Lighting, LLC. All rights reserved. Note: This document is subject to change without notice.


JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

## MBMG2CL130

Report #: ILL-08232016-03.3 (-16)  
 ILL-08232016-02.3 (-24)  
 ILL-08232016-01.3 (-32)  
 ILL-08232016-05.3 (-50)

### CCT / CRI Multipliers:


2700K / 82 CRI (x 0.96)  
 2700K / 92 CRI (x 0.8)  
 3000K / 82 CRI (x 1.00)  
 3000K / 92 CRI (x 0.83)  
 3500K / 82 CRI (x 1.03)  
 3500K / 92 CRI (x 0.86)  
 4100K / 82 CRI (x 1.04)  
 4100K / 92 CRI (x 0.89)



Watts: 9.8  
 Lumens: 1229  
 LPW: 125  
 CCT: 3000K

### Candelas at Nadir


Degree	Candela
0°	8561
5°	6476
15°	1184
25°	458
35°	214
45°	15



Watts: 9.8  
 Lumens: 1056  
 LPW: 108  
 CCT: 3000K

### Candelas at Nadir


Degree	Candela
0°	3116
5°	2785
15°	1439
25°	665
35°	116
45°	13



Watts: 9.8  
 Lumens: 1082  
 LPW: 110  
 CCT: 3000K

### Candelas at Nadir

Degree	Candela
0°	2581
5°	2498
15°	1517
25°	688
35°	139
45°	14



Watts: 9.8  
 Lumens: 1112  
 LPW: 113  
 CCT: 3000K

### Candelas at Nadir





Degree	Candela
0°	1533
5°	1494
15°	1224
25°	885
35°	267
45°	35

### APPLICATION DATA:

Illuminated width & length are based upon point at which illuminance falls to 50% of center illuminance. Recommended spacing is based upon uniform illuminance aiming angle is the angle between the lamp axis and the perpendicular to the illuminated plane.

W and L are the outer points where the candle power drops to 50% of maximum. FC are the initial foot candles at the center of the beam.

W Beam width  
 L Beam length  
 C Distance to center of beam  
 D Distance  
 FC Footcandles



	0° HORIZONTAL				30° HORIZONTAL				30° VERTICAL				60° VERTICAL						
	D	FC	W	L	D	C	FC	W	L	D	C	FC	W	L	D	C	FC	W	L
<b>MBMG2CL130-16</b> 3000K 16° Spot	6'	238	1' 7"	1' 7"	6'	3'	152	2' 4"	1' 9"	3'	5'	214	1' 6"	3' 1"	3'	2'	320	1' 2"	1' 3"
	8'	134	2' 2"	2' 2"	8'	4'	85.6	2' 11"	2' 6"	4'	6'	120	2' 1"	4'	4'	2'	171	1' 3"	1' 11"
	10'	85.6	2' 8"	2' 8"	10'	5'	54.8	3' 8"	3' 2"	5'	8'	79.5	2' 7"	4' 9"	5'	3'	129	1' 6"	1' 8"
	12'	59.5	3' 4"	3' 4"	12'	7'	38.2	4' 4"	3' 9"	6'	10'	53.6	3' 3"	5' 11"	6'	4'	80	1' 11"	2' 5"
<b>MBMG2CL130-24</b> 3000K 24° Narrow Flood	6'	86.6	3'	3'	6'	3'	58.6	3' 8"	3' 4"	3'	4'	81	2' 9"	4' 6"	3'	2'	125	1' 8"	1' 10"
	8'	48.7	4'	4'	8'	4'	33	4' 10"	4' 4"	4'	6'	46.9	3' 6"	5' 11"	4'	2'	65.9	2' 5"	2' 8"
	10'	31.2	5'	5'	10'	5'	21.1	6'	5' 4"	5'	7'	30	4' 4"	7' 4"	5'	3'	47	2' 10"	3' 1"
	12'	21.6	6'	6'	12'	6'	14.7	7' 3"	6' 5"	6'	9'	20.8	5' 3"	8' 9"	6'	4'	31.3	3' 6"	3' 9"
<b>MBMG2CL130-32</b> 3000K 32° Flood	6'	71.7	3' 7"	3' 7"	6'	3'	50.1	4' 2"	3' 9"	3'	4'	75.7	3'	4' 8"	3'	2'	107	2'	2' 4"
	8'	40.3	4' 10"	4' 10"	8'	4'	28.2	5' 7"	5' 1"	4'	5'	42.9	3' 9"	6' 1"	4'	3'	56.7	2' 11"	3' 1"
	10'	25.8	6'	6'	10'	4'	18.3	6' 11"	6' 2"	5'	6'	27	4' 11"	7' 8"	5'	3'	38.8	3' 4"	3' 8"
	12'	17.9	7' 4"	7' 4"	12'	5'	12.8	8' 2"	7' 5"	6'	8'	18.9	5' 10"	9' 2"	6'	4'	26.8	4'	4' 5"
<b>MBMG2CL130-50</b> 3000K 50° Wide Flood	6'	42.6	6' 4"	6' 4"	6'	2'	31.7	5' 6"	5' 5"	3'	3'	48.1	4' 1"	5' 3"	3'	2'	64.1	3'	3' 2"
	8'	24	8' 5"	8' 5"	8'	3'	17.9	7' 2"	7' 3"	4'	4'	27	5' 5"	6' 10"	4'	3'	35	4' 2"	4' 3"
	10'	15.3	10' 6"	10' 6"	10'	4'	11.4	8' 11"	9' 1"	5'	6'	17.5	6' 9"	8' 7"	5'	3'	23.2	5' 1"	5' 2"
	12'	10.6	12' 7"	12' 7"	12'	4'	7.9	10' 9"	10' 11"	6'	7'	12.2	8' 1"	10' 2"	6'	4'	16	6' 1"	6' 3"


JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

## MBMG2CL230

Report #: ILL-08232016-03.2 (-16)  
 ILL-08232016-02.2 (-24)  
 ILL-08232016-01.2 (-32)  
 ILL-08232016-05.2 (-50)

### CCT / CRI Multipliers:


2700K / 82 CRI (x 0.96)  
 2700K / 92 CRI (x 0.8)  
 3000K / 82 CRI (x 1.00)  
 3000K / 92 CRI (x 0.83)  
 3500K / 82 CRI (x 1.03)  
 3500K / 92 CRI (x 0.86)  
 4100K / 82 CRI (x 1.04)  
 4100K / 92 CRI (x 0.89)



Watts: 13.7  
 Lumens: 1678  
 LPW: 123  
 CCT: 3000K

### Candelas at Nadir


Degree	Candela
0°	11693
5°	8845
15°	1617
25°	625
35°	292
45°	21



Watts: 13.7  
 Lumens: 1442  
 LPW: 105  
 CCT: 3000K

### Candelas at Nadir


Degree	Candela
0°	4256
5°	3804
15°	1965
25°	909
35°	158
45°	17



Watts: 13.7  
 Lumens: 1478  
 LPW: 108  
 CCT: 3000K

### Candelas at Nadir

Degree	Candela
0°	3525
5°	3389
15°	2072
25°	940
35°	190
45°	19



Watts: 13.7  
 Lumens: 1519  
 LPW: 111  
 CCT: 3000K

### Candelas at Nadir





Degree	Candela
0°	2094
5°	2040
15°	1671
25°	1209
35°	364
45°	48

### APPLICATION DATA:

Illuminated width & length are based upon point at which illuminance falls to 50% of center illuminance. Recommended spacing is based upon uniform illuminance aiming angle is the angle between the lamp axis and the perpendicular to the illuminated plane.

**W** and **L** are the outer points where the candle power drops to 50% of maximum. **FC** are the initial foot candles at the center of the beam.

**W** Beam width  
**L** Beam length  
**C** Distance to center of beam  
**D** Distance  
**FC** Footcandles



	0° HORIZONTAL				30° HORIZONTAL				30° VERTICAL				60° VERTICAL						
	D	FC	W	L	D	C	FC	W	L	D	C	FC	W	L	D	C	FC	W	L
<b>MBMG2CL230-16</b> 3000K 16° Spot	6'	325	1' 7"	1' 7"	6'	3'	208	2' 4"	1' 9"	3'	5'	293	1' 6"	3' 1"	3'	2'	437	1' 2"	1' 3"
	8'	183	2' 2"	2' 2"	8'	4'	117	2' 11"	2' 6"	4'	6'	164	2' 1"	4'	4'	2'	234	1' 3"	1' 11"
	10'	117	2' 8"	2' 8"	10'	5'	74.8	3' 8"	3' 2"	5'	8'	109	2' 7"	4' 9"	5'	3'	176	1' 6"	1' 8"
	12'	81.2	3' 4"	3' 4"	12'	7'	52.2	4' 4"	3' 9"	6'	10'	73.2	3' 3"	5' 11"	6'	4'	109	1' 11"	2' 5"
<b>MBMG2CL230-24</b> 3000K 24° Narrow Flood	6'	118	3'	3'	6'	3'	80	3' 8"	3' 4"	3'	4'	111	2' 9"	4' 6"	3'	2'	171	1' 8"	1' 10"
	8'	66.5	4'	4'	8'	4'	45	4' 10"	4' 4"	4'	6'	64.1	3' 6"	5' 11"	4'	2'	90.1	2' 5"	2' 8"
	10'	42.6	5'	5'	10'	5'	28.8	6'	5' 4"	5'	7'	40.9	4' 4"	7' 4"	5'	3'	64.2	2' 10"	3' 1"
	12'	29.6	6'	6'	12'	6'	20	7' 3"	6' 5"	6'	9'	28.5	5' 3"	8' 9"	6'	4'	42.7	3' 6"	3' 9"
<b>MBMG2CL230-32</b> 3000K 32° Flood	6'	97.9	3' 7"	3' 7"	6'	3'	68.5	4' 2"	3' 9"	3'	4'	103	3'	4' 8"	3'	2'	146	2'	2' 4"
	8'	55.1	4' 10"	4' 10"	8'	4'	38.5	5' 7"	5' 1"	4'	5'	58.7	3' 9"	6' 1"	4'	3'	77.5	2' 11"	3' 1"
	10'	35.3	6'	6'	10'	4'	25	6' 11"	6' 2"	5'	6'	36.9	4' 11"	7' 8"	5'	3'	53.1	3' 4"	3' 8"
	12'	24.5	7' 4"	7' 4"	12'	5'	17.4	8' 2"	7' 5"	6'	8'	25.8	5' 10"	9' 2"	6'	4'	36.6	4'	4' 5"
<b>MBMG2CL230-50</b> 3000K 50° Wide Flood	6'	58.2	6' 4"	6' 4"	6'	2'	43.3	5' 6"	5' 5"	3'	3'	65.7	4' 1"	5' 3"	3'	2'	87.6	3'	3' 2"
	8'	32.7	8' 5"	8' 5"	8'	3'	24.5	7' 2"	7' 3"	4'	4'	36.9	5' 5"	6' 10"	4'	3'	47.8	4' 2"	4' 3"
	10'	20.9	10' 6"	10' 6"	10'	4'	15.6	8' 11"	9' 1"	5'	6'	23.9	6' 9"	8' 7"	5'	3'	31.8	5' 1"	5' 2"
	12'	14.5	12' 7"	12' 7"	12'	4'	10.8	10' 9"	10' 11"	6'	7'	16.6	8' 1"	10' 2"	6'	4'	21.9	6' 1"	6' 3"


JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

## MBMG2CL330

Report #: ILL-08232016-03.1 (-16)  
 ILL-08232016-02.1 (-24)  
 ILL-08232016-01.1 (-32)  
 ILL-08232016-05.1 (-50)

### CCT / CRI Multipliers:

2700K / 82 CRI (x 0.96)  
 2700K / 92 CRI (x 0.8)  
 3000K / 82 CRI (x 1.00)  
 3000K / 92 CRI (x 0.83)  
 3500K / 82 CRI (x 1.03)  
 3500K / 92 CRI (x 0.86)  
 4100K / 82 CRI (x 1.04)  
 4100K / 92 CRI (x 0.89)

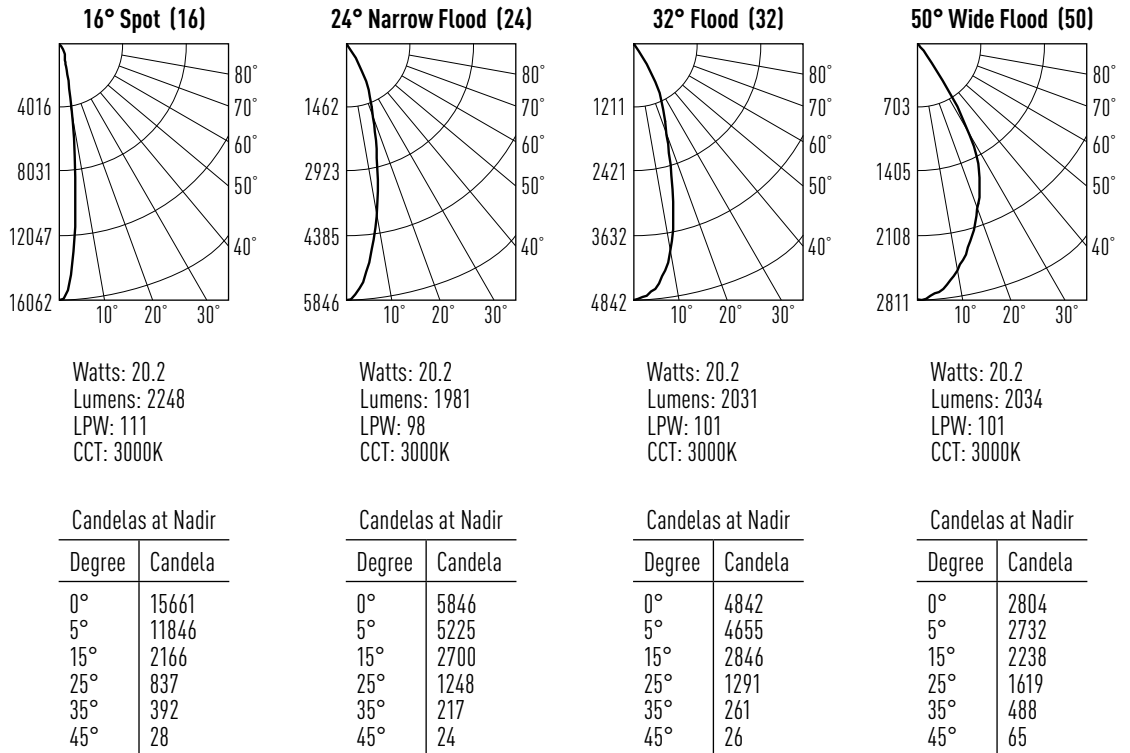


### APPLICATION DATA:

Illuminated width & length are based upon point at which illuminance falls to 50% of center illuminance. Recommended spacing is based upon uniform illuminance aiming angle is the angle between the lamp axis and the perpendicular to the illuminated plane.

**W** and **L** are the outer points where the candle power drops to 50% of maximum. **FC** are the initial footcandles at the center of the beam.

**W** Beam width  
**L** Beam length  
**C** Distance to center of beam  
**D** Distance  
**FC** Footcandles

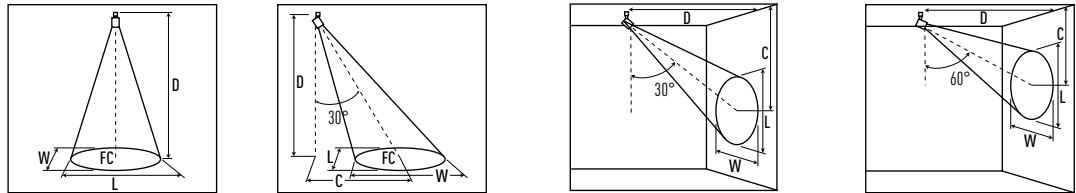

	0° HORIZONTAL				30° HORIZONTAL				30° VERTICAL				60° VERTICAL						
	D	FC	W	L	D	C	FC	W	L	D	C	FC	W	L	D	C	FC	W	L
<b>MBMG2CL330-16</b> 3000K 16° Spot	6'	435	1' 7"	1' 7"	6'	3'	278	2' 4"	1' 9"	3'	5'	392	1' 6"	3' 1"	3'	2'	585	1' 2"	1' 3"
	8'	245	2' 2"	2' 2"	8'	4'	157	2' 11"	2' 6"	4'	6'	220	2' 1"	4'	4'	2'	313	1' 3"	1' 11"
	10'	157	2' 8"	2' 8"	10'	5'	100	3' 8"	3' 2"	5'	8'	146	2' 7"	4' 9"	5'	3'	235	1' 6"	1' 8"
	12'	109	3' 4"	3' 4"	12'	7'	70	4' 4"	3' 9"	6'	10'	98.1	3' 3"	5' 11"	6'	4'	146	1' 11"	2' 5"
<b>MBMG2CL330-24</b> 3000K 24° Narrow Flood	6'	162	3'	3'	6'	3'	110	3' 8"	3' 4"	3'	4'	152	2' 9"	4' 6"	3'	2'	235	1' 8"	1' 10"
	8'	91.3	4'	4'	8'	4'	61.8	4' 10"	4' 4"	4'	6'	88	3' 6"	5' 11"	4'	2'	124	2' 5"	2' 8"
	10'	58.5	5'	5'	10'	5'	39.6	6'	5' 4"	5'	7'	56.2	4' 4"	7' 4"	5'	3'	88.2	2' 10"	3' 1"
	12'	40.6	6'	6'	12'	6'	27.5	7' 3"	6' 5"	6'	9'	39.1	5' 3"	8' 9"	6'	4'	58.7	3' 6"	3' 9"
<b>MBMG2CL330-32</b> 3000K 32° Flood	6'	135	3' 7"	3' 7"	6'	3'	94	4' 2"	3' 9"	3'	4'	142	3'	4' 8"	3'	2'	201	2'	2' 4"
	8'	75.7	4' 10"	4' 10"	8'	4'	52.9	5' 7"	5' 1"	4'	5'	80.7	3' 9"	6' 1"	4'	3'	107	2' 11"	3' 1"
	10'	48.4	6'	6'	10'	4'	34.4	6' 11"	6' 2"	5'	6'	50.7	4' 11"	7' 8"	5'	3'	72.9	3' 4"	3' 8"
	12'	33.6	7' 4"	7' 4"	12'	5'	23.9	8' 2"	7' 5"	6'	8'	35.5	5' 10"	9' 2"	6'	4'	50.3	4'	4' 5"
<b>MBMG2CL330-50</b> 3000K 50° Wide Flood	6'	77.9	6' 4"	6' 4"	6'	2'	57.9	5' 6"	5' 5"	3'	3'	87.9	4' 1"	5' 3"	3'	2'	117	3'	3' 2"
	8'	43.8	8' 5"	8' 5"	8'	3'	32.8	7' 2"	7' 3"	4'	4'	49.5	5' 5"	6' 10"	4'	3'	64	4' 2"	4' 3"
	10'	28	10' 6"	10' 6"	10'	4'	20.9	8' 11"	9' 1"	5'	6'	32	6' 9"	8' 7"	5'	3'	42.5	5' 1"	5' 2"
	12'	19.5	12' 7"	12' 7"	12'	4'	14.5	10' 9"	10' 11"	6'	7'	22.3	8' 1"	10' 2"	6'	4'	29.3	6' 1"	6' 3"


JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

## MBMG2CL430

Report #: ILL-08232016-03 (-16)  
 ILL-08232016-02 (-24)  
 ILL-08232016-01 (-32)  
 ILL-08232016-05 (-50)

### CCT / CRI Multipliers:

2700K / 82 CRI (x 0.96)  
 2700K / 92 CRI (x 0.8)  
 3000K / 82 CRI (x 1.00)  
 3000K / 92 CRI (x 0.83)  
 3500K / 82 CRI (x 1.03)  
 3500K / 92 CRI (x 0.86)  
 4100K / 82 CRI (x 1.04)  
 4100K / 92 CRI (x 0.89)

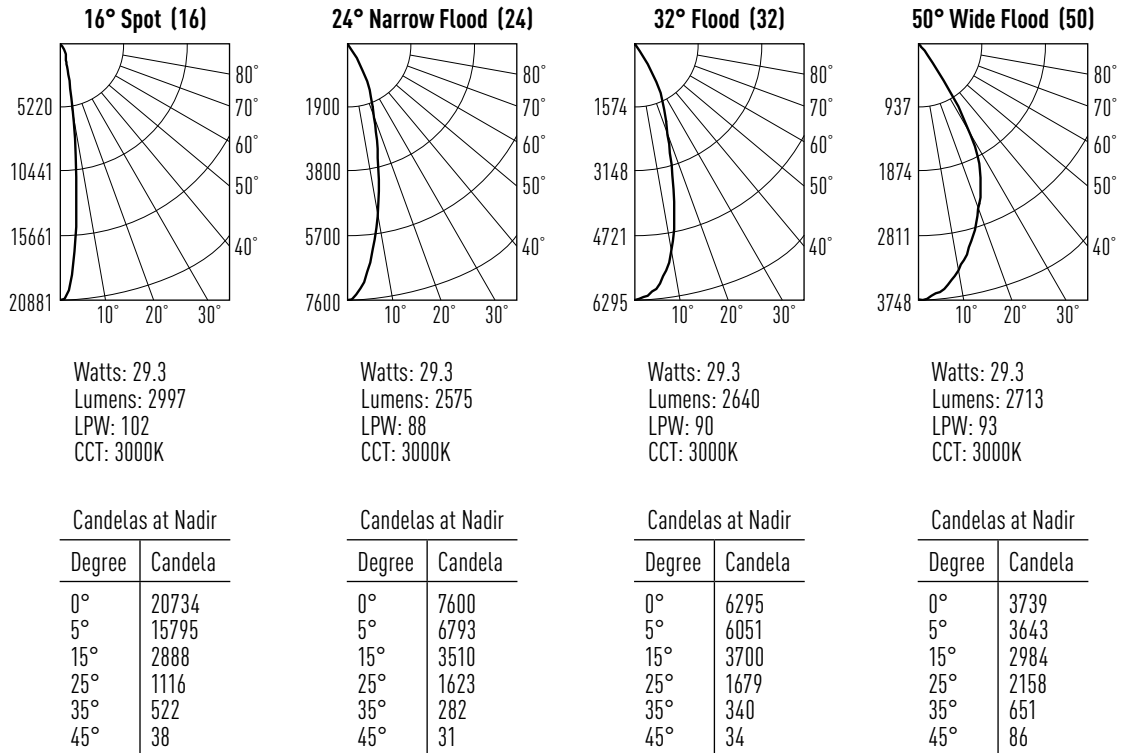


### APPLICATION DATA:

Illuminated width & length are based upon point at which illuminance falls to 50% of center illuminance. Recommended spacing is based upon uniform illuminance aiming angle is the angle between the lamp axis and the perpendicular to the illuminated plane.

W and L are the outer points where the candle power drops to 50% of maximum. FC are the initial footcandles at the center of the beam.

- W Beam width
- L Beam length
- C Distance to center of beam
- D Distance
- FC Footcandles

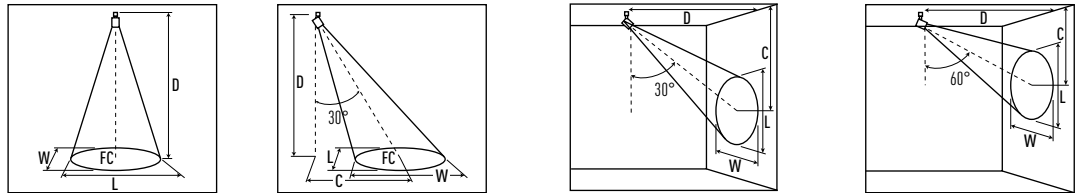

	0° HORIZONTAL				30° HORIZONTAL				30° VERTICAL				60° VERTICAL						
	D	FC	W	L	D	C	FC	W	L	D	C	FC	W	L	D	C	FC	W	L
<b>MBMG2CL430-16</b> 3000K 16° Spot	6'	580	1' 7"	1' 7"	6'	3'	371	2' 4"	1' 9"	3'	5'	523	1' 6"	3' 1"	3'	2'	780	1' 2"	1' 3"
	8'	326	2' 2"	2' 2"	8'	4'	209	2' 11"	2' 6"	4'	6'	293	2' 1"	4'	4'	2'	417	1' 3"	1' 11"
	10'	209	2' 8"	2' 8"	10'	5'	134	3' 8"	3' 2"	5'	8'	194	2' 7"	4' 9"	5'	3'	314	1' 6"	1' 8"
	12'	145	3' 4"	3' 4"	12'	7'	93.3	4' 4"	3' 9"	6'	10'	131	3' 3"	5' 11"	6'	4'	195	1' 11"	2' 5"
<b>MBMG2CL430-24</b> 3000K 24° Narrow Flood	6'	211	3'	3'	6'	3'	143	3' 8"	3' 4"	3'	4'	198	2' 9"	4' 6"	3'	2'	305	1' 8"	1' 10"
	8'	119	4'	4'	8'	4'	80.4	4' 10"	4' 4"	4'	6'	114	3' 6"	5' 11"	4'	2'	161	2' 5"	2' 8"
	10'	76	5'	5'	10'	5'	51.5	6'	5' 4"	5'	7'	73.1	4' 4"	7' 4"	5'	3'	115	2' 10"	3' 1"
	12'	52.8	6'	6'	12'	6'	35.7	7' 3"	6' 5"	6'	9'	50.8	5' 3"	8' 9"	6'	4'	76.3	3' 6"	3' 9"
<b>MBMG2CL430-32</b> 3000K 32° Flood	6'	175	3' 7"	3' 7"	6'	3'	122	4' 2"	3' 9"	3'	4'	185	3'	4' 8"	3'	2'	261	2'	2' 4"
	8'	98.4	4' 10"	4' 10"	8'	4'	68.8	5' 7"	5' 1"	4'	5'	105	3' 9"	6' 1"	4'	3'	138	2' 11"	3' 1"
	10'	63	6'	6'	10'	4'	44.7	6' 11"	6' 2"	5'	6'	65.9	4' 11"	7' 8"	5'	3'	94.7	3' 4"	3' 8"
	12'	43.7	7' 4"	7' 4"	12'	5'	31.1	8' 2"	7' 5"	6'	8'	46.1	5' 10"	9' 2"	6'	4'	65.3	4'	4' 5"
<b>MBMG2CL430-50</b> 3000K 50° Wide Flood	6'	104	6' 4"	6' 4"	6'	2'	77.2	5' 6"	5' 5"	3'	3'	117	4' 1"	5' 3"	3'	2'	157	3'	3' 2"
	8'	58.4	8' 5"	8' 5"	8'	3'	43.7	7' 2"	7' 3"	4'	4'	65.9	5' 5"	6' 10"	4'	3'	85.3	4' 2"	4' 3"
	10'	37.4	10' 6"	10' 6"	10'	4'	27.8	8' 11"	9' 1"	5'	6'	42.6	6' 9"	8' 7"	5'	3'	56.7	5' 1"	5' 2"
	12'	26	12' 7"	12' 7"	12'	4'	19.3	10' 9"	10' 11"	6'	7'	29.7	8' 1"	10' 2"	6'	4'	39.1	6' 1"	6' 3"

# DIMMING COMPATIBILITY

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

## 0-10V DIMMING

- 120V-277V
- Dims down to 10% light output
- Consult dimming manufacturer for installation instructions and power packs

## COMPATIBLE DIMMERS

Manufacturer	Part Number(s)
HUNT	PS-010-IV-120V, PS-010-WH-120V, PS-010-3W-IV-120, PS-010-3W-WH-120V, PS-010-IV-277V, PS-010-WH-277V, PS-010-3W-IV-277V, PS-010-3W-WH-277V, FD-010: PS-IFC-010-IV, PS-IFC-010-WH-120/277V, FD-010: PS-IFC-010-3W-IV, PS-IFC-010-3W-WH-120/277V, FD-010-120V, FD-010-277V
Leviton	Leviton Centura Fluorescent Control System, IllumaTech™ IP7 Series, DPSPE-212
Lightolier	ZP600FAM120, MP1500FAM120, V2000FAMU
Lithonia	LEQ BC, LEQ LVBC, SLD LVBC, SQ1DC
Lutron	DVTV, NTFTV
Synergy	ISD BC 120/277

