



Catalog Number	
Notes	Type

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use in offices and all rooms in the house.

ATTRIBUTES

Decorative curved linear design complements a variety of decors. Durable, milk white acrylic diffuser provides wide spread, uniform illumination. Screw-on diffuser provides easy access for cleaning and maintenance.

Utilizes (2) or (4) linear T8 fluorescent lamps for energy efficiency, superior color rendering and long life (not included).

Standard with 120 volt, 60Hz electronic ballast ensures no flickering and quiet operation without interfering with other electronics. Also available in other ballast configurations.

For use with non-dimmable switches only.

LISTING

CUL listed (standard) suitable for damp locations and ENERGY STAR® qualified. For non-RE ballast fixtures, UL (standard) and for CSA certified (see options).


WARRANTY

Guaranteed for two years against mechanical defects in manufacture.

Indoor Decorative

Cirrus Linear Flush Mount

Linear T8 Fluorescent

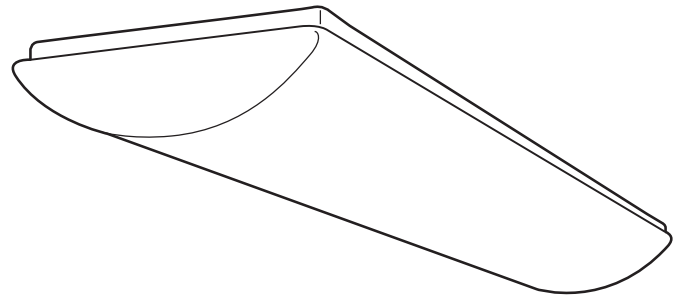


DIMENSIONS

Nominal Size	Lamp Configuration	Model Number	Number of Lamps	(A) Width inches (cm)	(B) Length inches (cm)	(C) Extension* inches (cm)
1'x4'		11602	(2) 32W Linear T8	9-7/8" (25.1)	48-5/8" (123.5)	3-1/2" (8.9)
1'x4'		11604	(4) 32W Linear T8	9-7/8" (25.1)	48-5/8" (123.5)	3-1/2" (8.9)

*Extension from ceiling

All dimensions are in inches (centimeters)

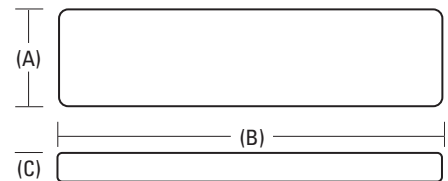

ORDERING INFORMATION

Example: 11722RE

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories as separate catalog numbers.

Model Number ^{1,2}	Residential Ballast ³	Lamp ⁴	Ballast/Voltage ⁵	Options
11602 1'x4' - (2) 32W Linear T8 lamps	RE 120 volt residential electronic ballast (standard)	(blank) RE ballast fixtures only	(blank) RE ballast fixtures only	GEB Electronic ballast, <20%THD
11604 1'x4' - (4) 32W Linear T8 lamps	(blank) Other voltage and ballast types available (see ballast/voltage)	32 32W Linear T8 (Non-RE ballast fixtures only)	MVOLT Multi-volt 120 120 volt 277 277 volt 347 347 volt	GEB10IS T8 electronic ballast, <10% THD, instant start GEB10RS T8 electronic ballast, 10% THD, rapid start CSA CSA certified ⁶
			Others available: consult factory	Consult factory for other options and accessories

Notes:

- Lamps not included.**
- Use with non-dimmable switches only.
- Residential electronic ballast standard and requires **RE** designation.
- No designation for lamp type is required on **RE** ballast fixtures.
- No designation for ballast/voltage type is required on **RE** ballast fixtures.
- CSA standard on **RE** ballast fixtures.

Accessories/Replacement parts	
DCIRR	1'X4' pearl white acrylic diffuser

Cirrus Linear Flush Mount

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.



Consumer Products

One Lithonia Way, Conyers, GA 30012

Phone: 800-748-5070 Fax: 770-860-3903

In Canada: 160 Avenue Labrosse, Point-Claire, P.Q., H9R 1A1
www.lightahome.com