


**CAUTION – RISK OF SHOCK –**

Disconnect Power at the main circuit breaker panel or main fuse box before starting and during the installation.

**LOOP/CHAIN LINK MOUNT**


- 1) Lower the arms down towards ring. Place plates at ends of arms on arch on top of ring. Align holes in plates at end of arms with holes along top of ring.
  - 2) Thread screws into holes in plates and into holes in ring. Tighten screws to secure arms to ring.
  - 3) Pass fixture wire through hole in threaded pipe at end of stem. Screw threaded pipe on end of stem into coupling. **NOTE:** Thread locking compound must be applied to all stem threads to prevent accidental rotation of fixture during cleaning, relamping, etc.
  - 4) Pass fixture wire through remaining stems and screw stems together.
  - 5) Thread one small threaded pipe into end of each small loop.
  - 6) Pass fixture wire through first loop. Thread first loop onto end of last stem.
  - 7) Pass fixture wire through second loop and through hole in canopy.
  - 8) Pass threaded pipe at end of second loop through hole in canopy.
  - 9) Pass fixture wire through lockwasher. Thread lockwasher onto end of threaded pipe protruding from inside canopy.
  - 10) Pass fixture wire through hexnut. Thread hexnut onto end of threaded pipe.
  - 11) Attach chain link to small loop at end of stem and to loop on canopy.
  - 13) Find the appropriate threaded holes on mounting strap. Assemble mounting screws into threaded holes.
  - 14) Attach mounting strap to outlet box. Mounting strap can be adjusted to suit position of fixture.
  - 15) Grounding instructions: (See Illus. A or B)
    - A) On fixtures where mounting strap is provided with a hole and two raise dimples. Wrap ground wire from outlet box around green ground screw, and thread into hole.
    - B) On fixtures where a cupped washer is provided. Put ground wire from outlet box under cupped washer and green ground screw and thread screw into hole in mounting strap.
- If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector, after following the above steps. Never connect ground wire to black or white power supply wires.

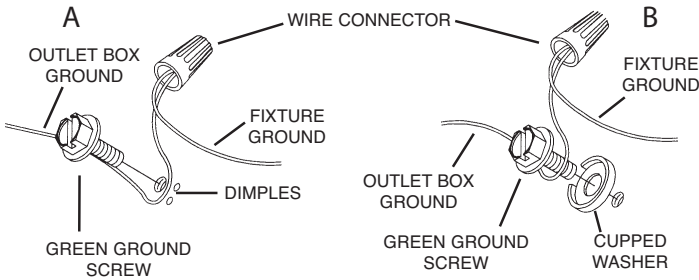


- 16) Make wire connections. Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

\*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



- 17) Push fixture to ceiling, carefully passing mounting screws through holes in canopy. **NOTE:** Be certain wires do not get pinched between mounting plate and canopy
- 18) Thread lock-up knobs onto mounting screws. Tighten lock-up knobs to secure fixture to ceiling.
- 19) Insert recommended bulbs. (Not supplied)

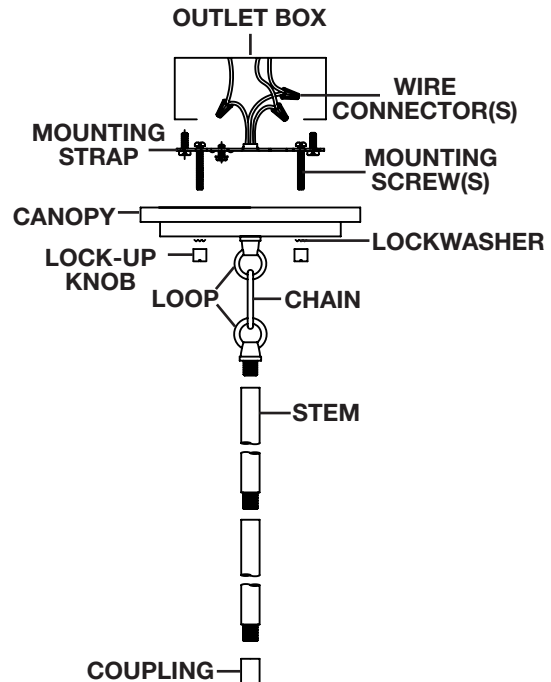

**RIGID STEM MOUNT**

- 1) Follow steps 1-4 in Loop/Chain Link/Loop Instructions
- 2) Remove small loop from the canopy. **NOTE:** The lockwasher and hexnut will be used in step 4.
- 3) Remove threaded pipe from small loop.
- 4) Pass fixture wire through the small threaded pipe removed from small loop. Thread small threaded pipe into end of the last stem.
- 5) Pass fixture wire through the hole in canopy. Lower canopy down towards stem. Pass hole in canopy over end of threaded pipe on last stem.
- 6) Pass fixture wire through lockwasher. Thread lockwasher onto threaded pipe protruding from inside canopy.
- 7) Pass fixture wire through hexnut and thread hexnut onto end of threaded pipe.
- 8) Follow steps 12-18 in Loop/Chain Link/Loop Installation instructions.

