




Location:

SLW-3512-1.5  
Two Handle Widespread Lavatory Faucet  
Specification Submittal



Model Numbers	Specification
<input type="checkbox"/> <b>SLW-3512-1.5</b> <i>Dia Two Handle Widespread Lavatory Faucet</i>	Two handle widespread lavatory faucet featuring an 8" to 16" mounting configuration. Includes ceramic cartridges, 1/2" IPS inlet connections, metal drain assembly and standard 1.5 gpm (5.7 L/min) aerator. Components made from brass and nonmetallic materials plated in standard polished chrome finish.  (ADA compliant for lever and blade handle options only)
<b>Modifications</b>	<b>Warranty</b>
<input type="checkbox"/> <b>-H2</b> <i>Blade handles</i> <input type="checkbox"/> <b>-H3</b> <i>Cross handles</i>	
<b>Note:</b> Append appropriate -suffix to model number.	<b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations. <b>5 Years</b> - for industrial/commercial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.
<b>Compliance</b>	
-ASME A112.18.1/CSA B125.1 -NSF/ANSI 61.9, NSF/ANSI 372 -WaterSense 1.5 gpm (5.7 L/min)	

**Dimensions**

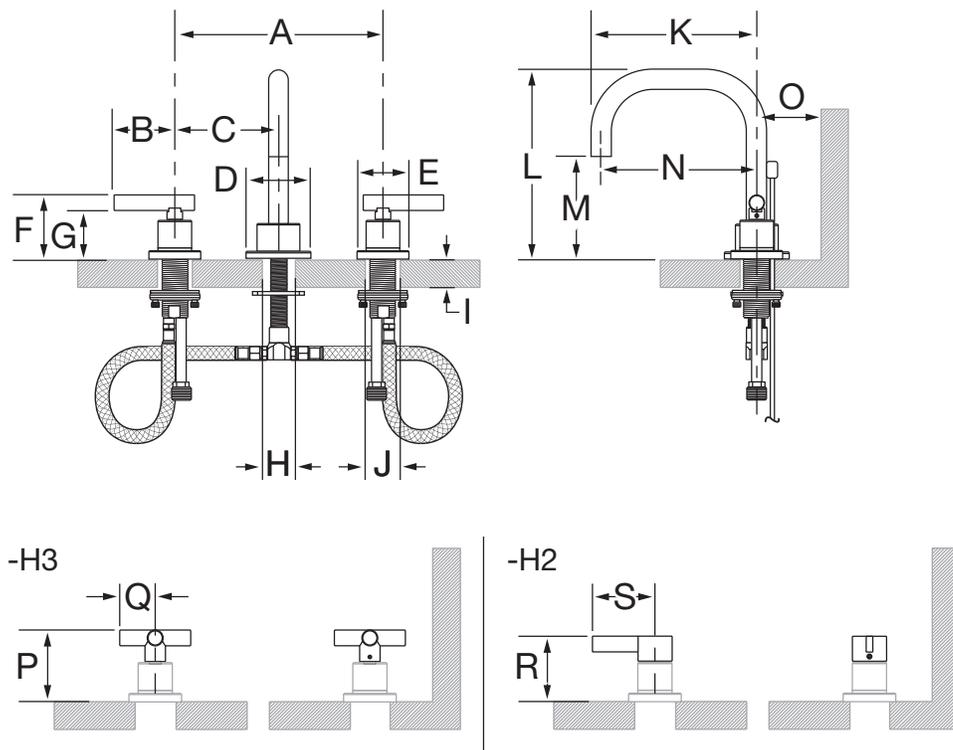

Measurements	
A	Min. 8", 203 mm Max. 16", 406 mm
B	2-3/8", 60 mm
C	Min. 4", 102 mm
D	2-1/2", 64 mm
E	2", 51 mm
F	2-1/2", 64 mm
G	1-7/8", 48 mm
H	Hole Size Min. Ø 1-1/2", 38 mm Max. Ø 1-5/8", 41 mm
I	Deck Thickness Ref. Max. 1-3/8", 35 mm
J	(2x) Hole size Min. Ø 1-1/8", 29 mm Max. Ø 1-1/2", 38 mm
K	6-3/8", 162 mm
L	7-1/4", 185 mm
M	3-7/8", 98 mm
N	6", 152 mm
O	1-1/2", 38 mm
P	2-3/4", 70 mm
Q	1-3/8", 35 mm
R	2-1/2", 64 mm
S	2-3/8", 60 mm

**Note:** Dimensions subject to change without notice.