



Location:



S-9600TS-P, S-9600TS-P-TRM, S9600TSPTRMTC  
Tub/Shower Valve System or Trim  
**Specification Submittal**

**Feature Highlights**

- Origins Tub/Shower Valve System or Trim
- Requires Temptrol® Pressure Balancing Tub/Shower Valve (included with S-9600TS-P)
- Adjustable stop screw to limit handle turn (included with S-9600TS-P)
- Integral diverter control
- Tri-star handle
- Diverter tub spout not included
- Showerhead not included
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S9600TSPTRMTC)

**Model Numbers**

- S-9600TS-P**  
Tub/Shower Valve System with integral diverter control & Temptrol Pressure Balancing Tub/Shower Valve
- S-9600TS-P-TRM**  
Tub/Shower Valve Trim with integral diverter control, Temptrol Pressure Balancing Tub/Shower Valve ordered separately
- S9600TSPTRMTC**  
Tub/Shower Valve Trim with integral diverter control, TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap

**Compliance**

- ASME A112.18.1/CSA B125.1
- Buy American Act (S-9600TS-P only)



**Warranty**

**Limited Lifetime** - to the original end purchaser in consumer/residential installations.  
**5 Years** - for industrial/commercial installations.  
 Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.  
 Go to [www.symmons.com/register](http://www.symmons.com/register) to register your Symmons product.


**Options/Modifications**

- B** *Brass escutcheon (chrome only)*
- CHKS** *Integral check stops - for use in installations where a positive shut-off device is used downstream of mixing valve*
- D** *Brass dome cover (chrome only)*
- LAM**  *Metal finish insert handle*
- LP**  *Loop handle*
- REB** *Rebuild trim kit, includes TA-10 and TA-4*
- VP** *Vandal resistant escutcheon screws in place of standard screws*
- X** *Integral service stops - allows water shut-off at valve for service*

**Note:** Append appropriate -suffix to model number.

## Dimensions

Measurements	
A	Ø 5-3/4", 146 mm
B	Ref. 42", 1067 mm
C	2-1/8", 54 mm
D	2-7/8", 73 mm
E	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm

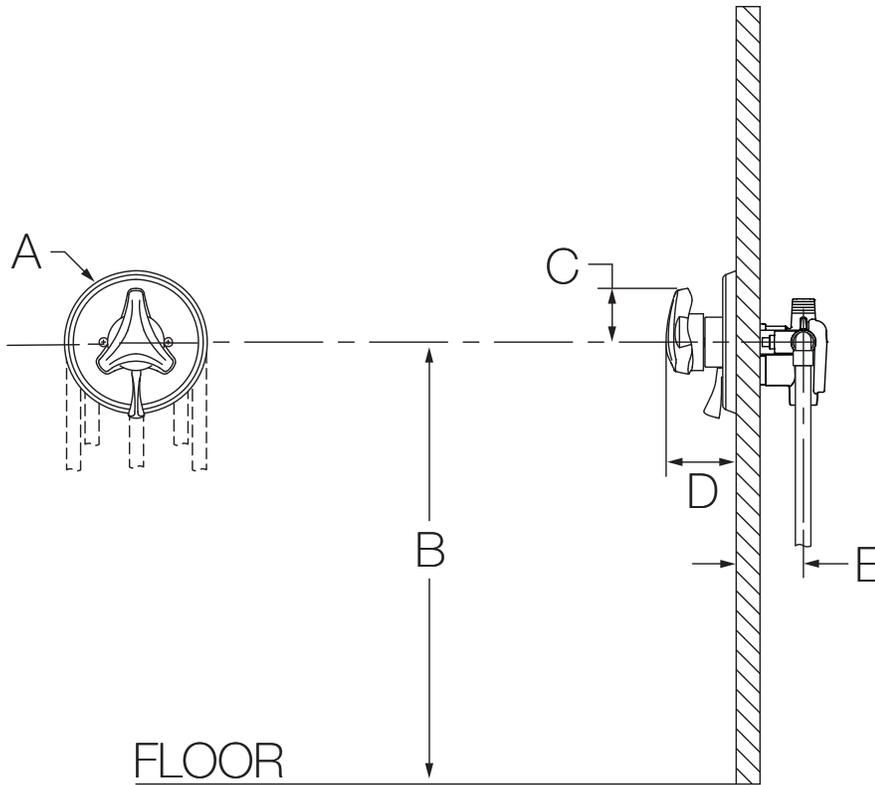

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see E as reference).
- 4) Dimensions subject to change without notice.