

Location:


SYMMONS® Temptrol®
Shower and Tub-Shower Mixing Valve
Models S-46-1-BODY, S-46-2-BODY
Specification Submittal



Model Numbers

- S-46-1-BODY, Symmons Temptrol Shower mixing valve with integral volume control and plug installed in tub supply output port
- S-46-2-BODY, Symmons Temptrol Tub-Shower mixing valve with integral diverter

Modifications

- IPS 1/2" female IPS connections
- REV Reverse coring, hot on right, cold on left, for back to back installations

Feature Highlights

- Symmons Temptrol 4-port pressure-balancing mixing valve with adjustable stop screw to limit handle turn
- Supply input ports 1/2 inch sweat
- Output ports NPS threaded 1/2 inch

Standards / Certifications

ASME A112.18.1/CSA B125.1


ASSE 1016



Warranty

- Limited Lifetime - to the original end purchaser in residential/consumer installations.
- 5 years - for commercial installations

Dimensions *Temptrol Shower & Tub-Shower Valve, 4-port valve*

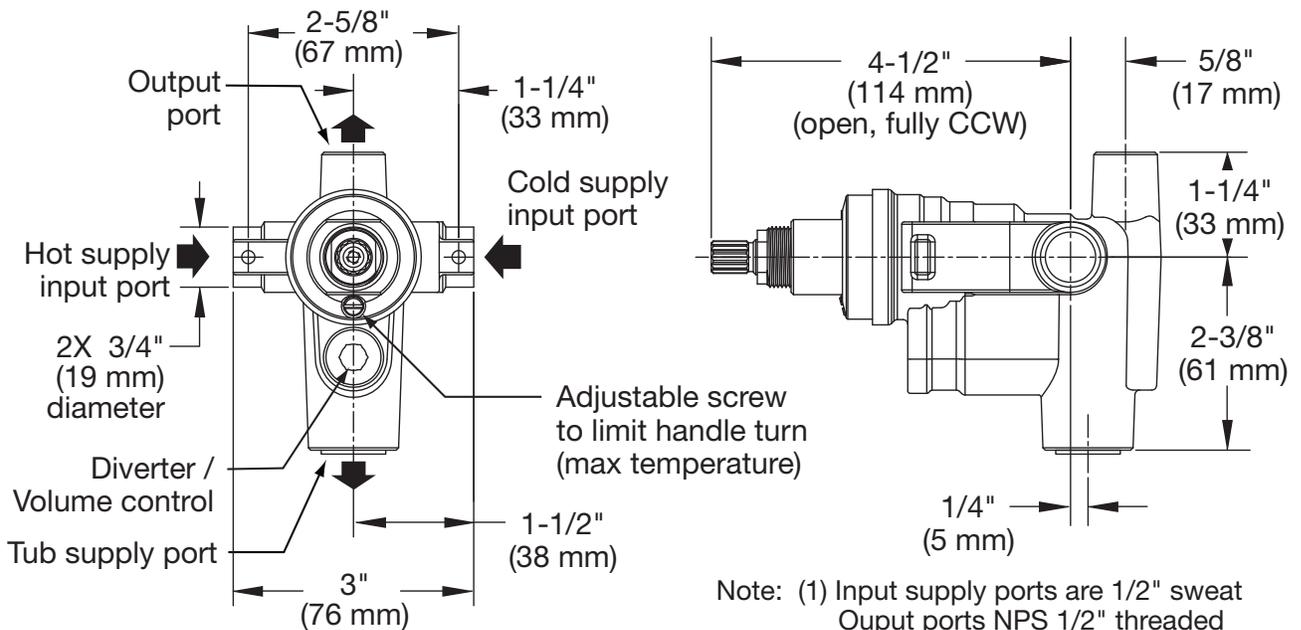

Note: (1) Input supply ports are 1/2" sweat
Output ports NPS 1/2" threaded
(2) plug for tub supply port is required for shower only valve installations