



Location:

5501-TRM, 5501TRMTC  
Shower Trim  
Specification Submittal



**Feature Highlights**

- Elm Shower Trim
- Requires Temptrol® Pressure Balancing Shower Valve
- Metal lever handle
- 5 mode showerhead
- 2.5 gpm (9.5 L/min) flow restrictor
- Tub spout not included
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 5501TRMTC)

**Model Numbers**

- 5501-TRM**  
Shower Trim, Temptrol Pressure Balancing Shower Valve ordered separately
- 5501TRMTC**  
Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap

**Compliance**

- ASME A112.18.1/CSA B125.1



**Warranty**


**Limited Lifetime** - to the original end purchaser in consumer/residential installations.  
**5 Years** - for industrial/commercial installations.  
 Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.  
 Go to [www.symmons.com/register](http://www.symmons.com/register) to register your Symmons product.

**Options/Modifications**

- 1.5**  1.5 gpm (5.7 L/min) flow restrictor
- 2.0** 2.0 gpm (7.6 L/min) flow restrictor
- EX** Exposed column/slide bar, hand shower bracket and hand shower wand (35EX)
- L1** Less showerhead
- LP**  Loop handle
- LR**  Lever handle
- REB** Rebuild trim kit, includes TA-10 and TA-4
- VP** Vandal resistant escutcheon screws in place of standard screws
- SBZ** Seasoned Bronze
- STN** Satin Nickel finish

**Note:** Append appropriate -suffix to model number.

## Dimensions

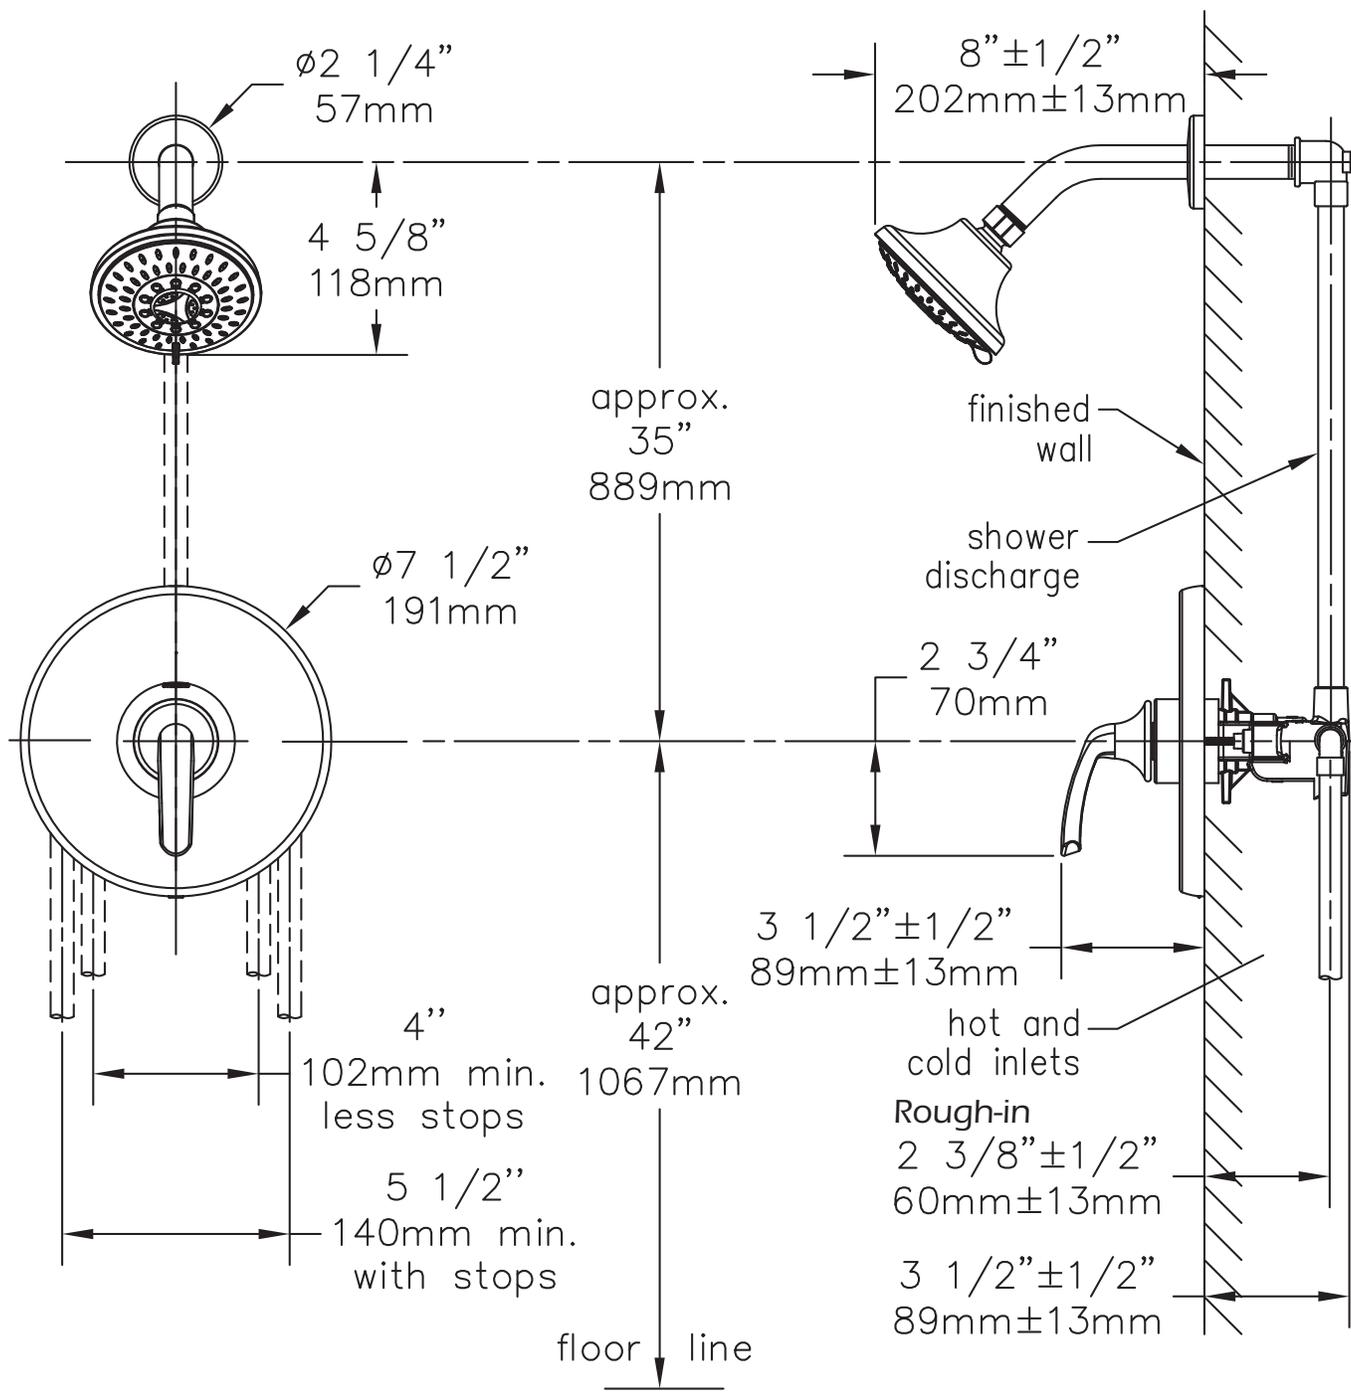

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls  $1/2''$  or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.