


- | | | | | | | | | | |
|---|---|--|--|--|--|--|--|--|--|
| R89-1TBC Finish(C) <input type="checkbox"/> | R89-1TBK Finish(K) <input type="checkbox"/> | LG89-7TBC Finish(C) <input type="checkbox"/> | LG89-7TBD Finish(D) <input type="checkbox"/> | LG89-7TBK Finish(K) <input type="checkbox"/> | LG89-7TBY Finish(Y) <input type="checkbox"/> | LG89-8TBC Finish(C) <input type="checkbox"/> | LG89-8TBD Finish(D) <input type="checkbox"/> | LG89-8TBK Finish(K) <input type="checkbox"/> | LG89-8TBY Finish(Y) <input type="checkbox"/> |
|---|---|--|--|--|--|--|--|--|--|

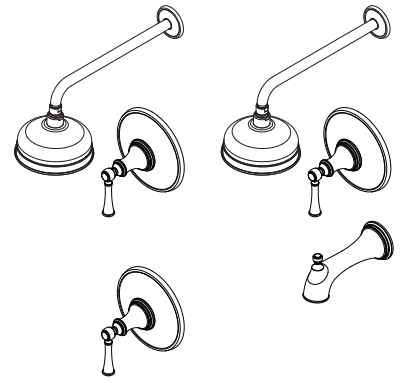

Specifications

- SecurePfit™
- Trim Only, Valve Not Included

Features

- 1.8 GPM Flow Rate (Showerhead)
- All Metal Construction
- SecurePfit™
- Brass Ball Joints
- Fits OX8 Valve Bodies
- Raincan Showerhead
- Flange Only (1TB Only)
- Shower Only (7TB Only)
- Tub & Shower (8TB Only)
- Trim Only, Valve Not Included
- Easy To Clean Nozzles
- Pforever Warranty®

Code Compliance

- Pfister products are designed and manufactured in compliance with the following standards and codes:
- IAPMO Certified
 - CSA B125 Certified
 - ASME A112.18.1
 - CEC Compliant
 - Cal Green Compliant
 - ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

