


# Drop-In Loop Hanger Fast Pipe Installation



Article Number	Part Number	Nominal Pipe Size	Rod Size	Max. Recom. Load LBS. (N)
	DH0100EG	1"	3/8"	300 (1334)
	DH0125EG	1 1/4"	3/8"	300 (1334)
	DH0150EG	1 1/2"	3/8"	300 (1334)
	DH0200EG	2"	3/8"	300 (1334)
598984*	DHM0100EG	25 DN	M10	300 (1334)
598985*	DHM0125EG	32 DN	M10	300 (1334)
598994*	DHM0150EG	40 DN	M10	300 (1334)
598995*	DHM0200EG	50 DN	M10	300 (1334)

\*Vds Approval Number G416016

1

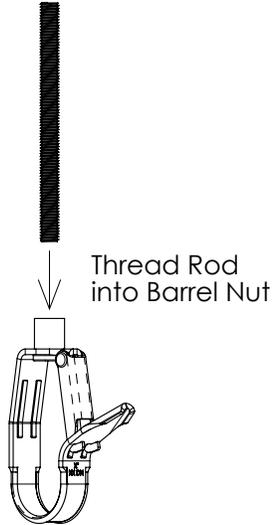


2

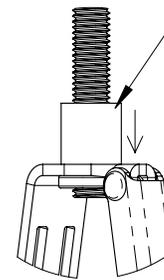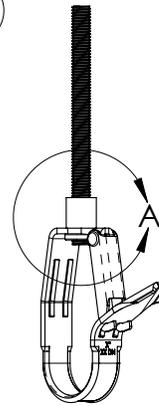


DETAIL A  
SCALE 1 : 2

Contractor tip:  
Push rubber sleeve  
down (Limits rotation  
of hanger)



3

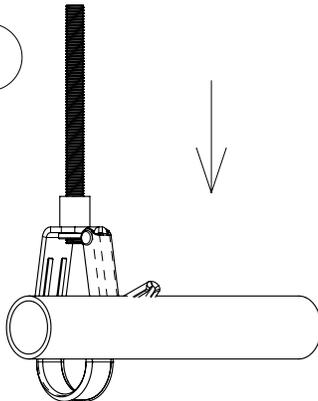

4

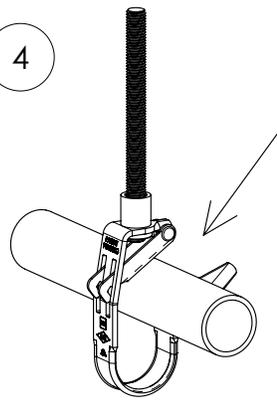

5

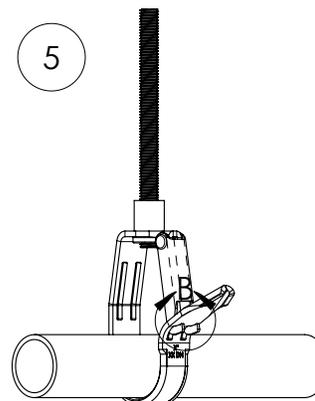

DETAIL B  
SCALE 1 : 1

Visually check latch hooks  
are visible through body  
after installation of pipe

**WARNING:**

- nVent products shall be installed and used only as indicated in nVent product instruction sheets and training materials. Instruction sheets are available at [www.nVent.com](http://www.nVent.com) and from your nVent customer service representative.
- nVent products must never be used for a purpose other than the purpose for which they were designed or in a manner that exceeds specified load ratings.
- All instructions must be **completely** followed to ensure proper and safe installation and performance.
- Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and/or death, and void your warranty.
- Products that are manufactured using spring steel components shall be used only in a non-corrosive indoor environment.
- All pipe supports, hangers, intermediate components and structural attachments must **ONLY** be used as described herein and are **NEVER** to be used for any other purpose.

NOTE: All load ratings are for static conditions and do not account for dynamic loading such as wind, water or seismic loads, unless otherwise noted.

The customer is responsible for:

- Conformance to all governing codes.
- The integrity of structures to which the products are attached, including their capability of safely accepting the loads imposed, as evaluated by a qualified engineer.
- Using appropriate industry standard hardware as noted above.

**SAFETY INSTRUCTIONS:**

All governing codes and regulations and those required by the job site must be observed. Always use appropriate safety equipment such as eye protection, hard hat, and gloves as appropriate to the application.

nVent, CADDY, ERICO CADWELD, ERICO CRITEC, ERICO, ERIFLEX, and LENTON are owned by nVent or its global affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.



TECHNICAL SUPPORT:  
[www.nVent.com](http://www.nVent.com)

CFS532\_D

1 OF 2

© 2015-2018 nVent All Rights Reserved



# Drop-In Loop Hanger

## Fast Pipe Installation

PART NUMBER	ARTICLE NUMBER	NOMINAL PIPE SIZE	OUTER DIAMETER OD	ROD SIZE RS	A	B	C	D	MINIMUM INSTALLATION HEIGHT H	STATIC LOAD F
DH0100EG	-	1"	1.315"	3/8"	4 3/8"	2 9/16"	2 3/16"	3"	3 1/2"	300 lb
DH0125EG	-	1 1/4"	1.660"	3/8"	5"	3 1/8"	2 1/2"	3 9/16"	4 1/8"	300 lb
DH0150EG	-	1 1/2"	1.900"	3/8"	5 1/2"	3 7/16"	2 3/4"	3 15/16"	4 3/8"	300 lb
DH0200EG	-	2"	2.375"	3/8"	6 7/16"	4 1/8"	3 1/4"	4 15/16"	5 1/4"	300 lb
DHM0100EG	598984	25 DN	33.7 mm	M10	111.1 mm	65.1 mm	55.6 mm	75.5 mm	88.9 mm	1334 N
DHM0125EG	598985	32 DN	42.4 mm	M10	127.0 mm	79.4 mm	63.5 mm	90.7 mm	104.8 mm	1334 N
DHM0150EG	598986	40 DN	48.3 mm	M10	139.7 mm	87.3 mm	69.9 mm	100.4 mm	111.1 mm	1334 N
DHM0200EG	598987	50 DN	60.3 mm	M10	163.5 mm	104.8 mm	82.6 mm	125.0 mm	133.4 mm	1334 N

