

STRUCTURAL ATTACHMENTS



SIDE BEAM CONNECTOR

FIG. 905


Function: Designed for attaching hanger rod to the side of wooden beams or walls. Normally secured in place with Fig. 48 wood drive screw.

Material: Malleable iron

Finish: Plain or electro-galvanized

Approvals: Complies with Federal Specification A-A-1192A (Type 34) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 34) which supersedes ANSI/MSS SP-69.

Ordering: Specify figure number, rod size, and finish.

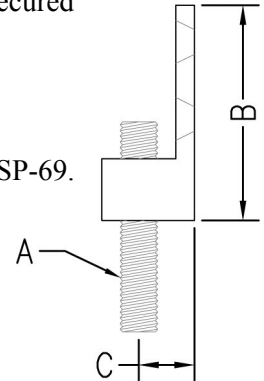

Rod Size A	B		C		Drive Screw Size	Max. Rec. Load		Wt. Each	
						lbs.	kN	lbs.	kg
3/8	2 ³ / ₁₆	(55.56)	9/ ₁₆	(14.29)	#12 x 1 ¹ / ₂	250	(1.11)	.13	(.06)
1/2	2 ³ / ₄	(69.85)	3/ ₄	(19.05)	#14 x 1 ¹ / ₂	480	(2.14)	.25	(.11)



PHD Manufacturing, Inc.

44018 Columbiana-Waterford Road
Columbiana, Ohio 44408-9481

Phone: 800-321-2736 • 330-482-9256

Fax: 330-482-2763

Web: www.phd-mfg.com

The Complete Line of Pipe Supports and Devices

Pipe Hangers ▲ Strut & Accessories ▲ Pipe Clamps ▲ Beam Clamps ▲ Shields