Aquifer® | K-77685

Single-cartridge water filtration system

Features

- Single-stage filtration and absorption system
- Reduces Chlorine Taste & Odor, Chloramine, Particulate Class I, Lead, Asbestos, Cyst, Mercury, Turbidity, and select Pharmaceuticals. See Performance Data Sheet for individual contaminants and reduction performance
- Includes Aquifer single replacement cartridge
- Filter head automatically turns off water supply when cartridge is removed
- 0.85 gpm maximum flow rate at 60 psi
- Eco-friendly coconut shell-based carbon filter
- Recommended for use with KOHLER® beverage faucets



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 6:2 - US-CA

Codes/Standards

CSA B483.1
NSF/ANSI 42
NSF Protocol P473
NSF/ANSI 401
NSF/ANSI 53
NSF/ANSI 42|NSF/ANSI 53|NSF/ANSI 401|NSF Protocol P473

Technical Information

All product dimensions are nominal.

Flow Rate

Faucet Flow Rate:	0.85 gpm (3.2 l/min)

Material

- High-impact plastic construction

Recommended Products/Accessories

K-26369 Beverage faucet
K-24134 Beverage faucet
K-24077 Beverage faucet
K-28291 Beverage faucet
K-28292 Beverage faucet
K-26367 Traditional beverage faucet
K-24074 Beverage faucet
K-26368 Transitional beverage faucet


Warranty

See website for detailed warranty information.

KOHLER® Water Filter Systems Five-Year Limited Warranty

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 6:2 - US-CA

THE BOLD LOOK OF KOHLER®

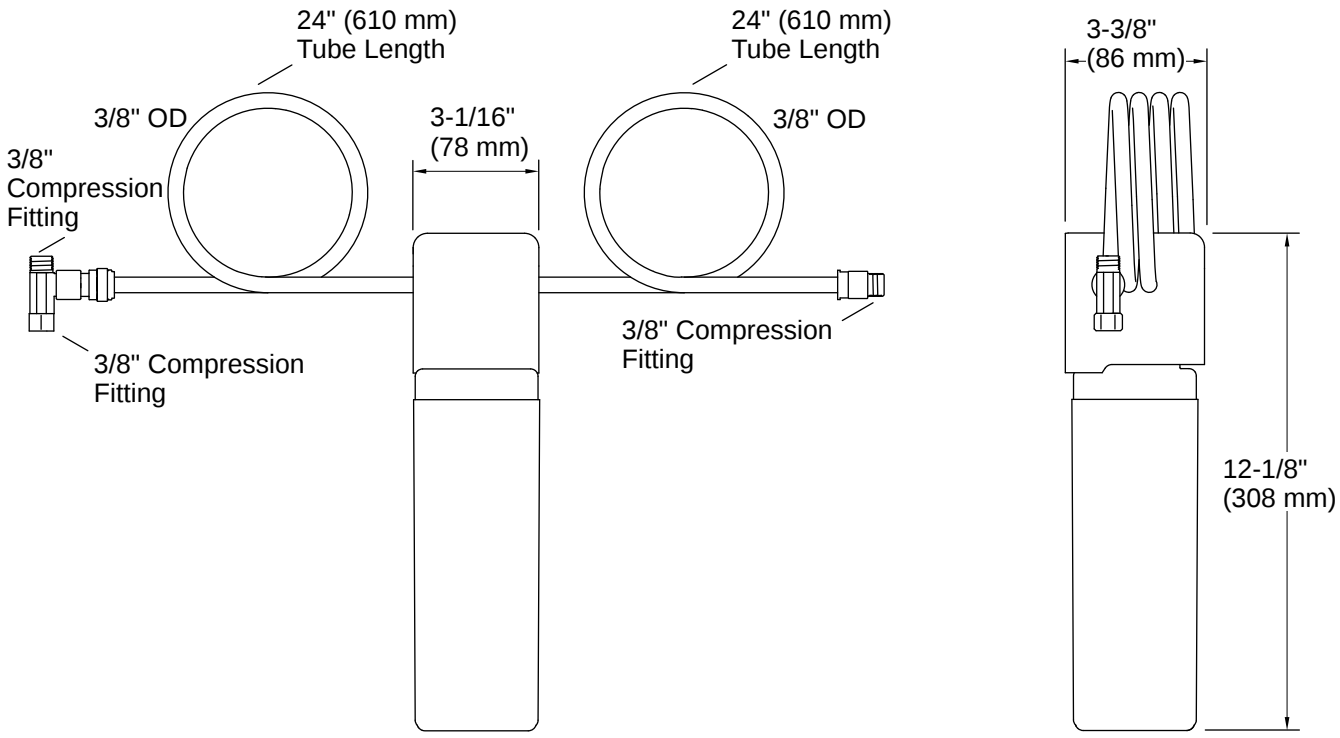

Installation

- Quarter-turn twist cartridge for easy installation and replacement
- Under-sink
- For cold water use only

Installation Notes

Install this product according to the installation instructions.

To prevent the risk of property damage, protect from freezing.
For cold water use only.
To ensure the filter continues to reduce contaminants effectively, it is recommended that the filter gets replaced every 6 months.
Application guideline/water supply parameters: Water Pressure: 40-120 psi (276-827 kPa) Water Temperature: 33-100°F (0.5-37.8°C)
Capacity: 389 gal (1,472 L)

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-15-2026 6:2 - US-CA

THE BOLD LOOK OF KOHLER