

Installation Instructions

MAXADAPTOR® Couplings

Shielded, universal, high performance sewer repair couplings designed for the repair of most types and sizes of sewer/drainage pipes.




MAX

MAX Series



- NOTE:**
- ▶ Coupling should not be disassembled
 - ▶ Do not use an impact gun. Proper tightening requires slow speeds, similar to hand-tightening speeds
 - ▶ Tension clamp is lubricated to prevent galling during installation
 - ▶ For non-pressure, gravity flow sewer applications only

For Joining Ductile Iron/Asbestos Cement/Cast Iron/Plastic

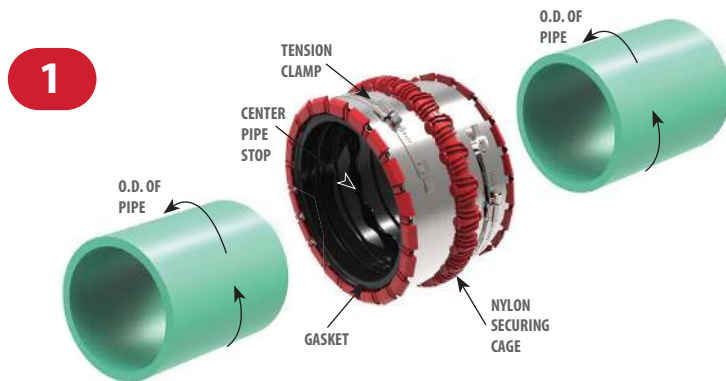

Measure outside diameters of the two pipes to be joined, ensuring diameters fall within pipe size chart (see reverse side). Make sure the MAXADAPTOR® Coupling and pipes are devoid of dirt and debris.

Before installing, tighten both sides of the MAXADAPTOR® Coupling, alternating back and forth, until coupling ID's are closely matched to the two pipe OD's. Lubricate pipe ends and gasket with soapy water solution.

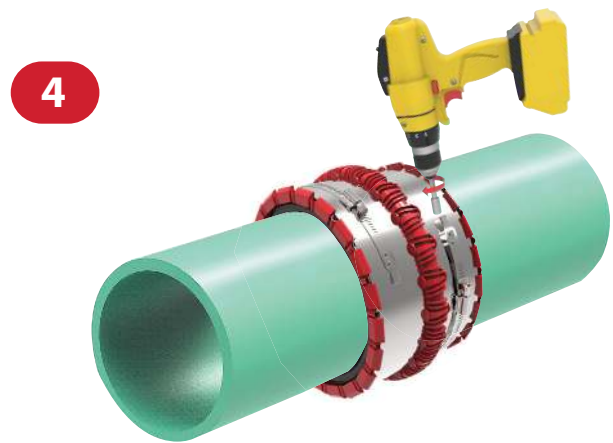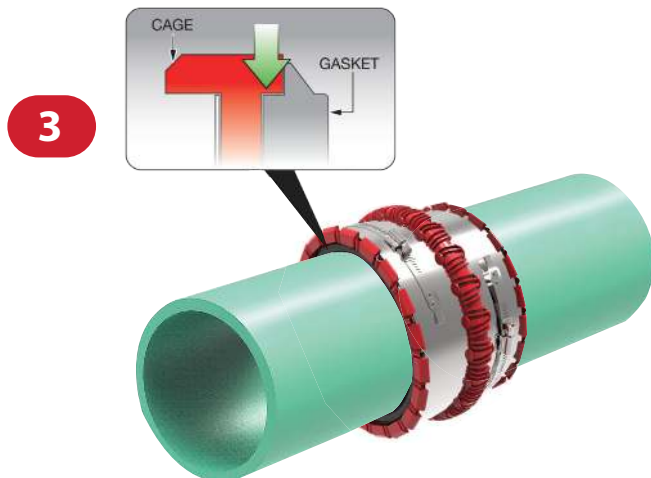

Install pipe ends into coupling, just short of center pipe stop. The center section of the nylon securing cage has to be unimpeded in order for central reduction to take place. Ensure gasket is centered and properly engaged inside nylon securing cage (see insert) before tightening tension clamps.

Take up all slack in coupling with a cordless drill. Complete the installation by tightening the tension clamps with a pre-calibrated torque wrench, alternating back and forth, to 80 in/lbs. minimum.

Gripper Gasket LLC | 1660 Leeson Lane | Corona, CA 92879
(951) 479-4999

grippergasket.com

Page 1

REV. 11/22

 **GRIPPERGASKET™**

Installation Instructions

MAXADAPTOR® Couplings

Shielded, universal, high performance sewer repair couplings designed for the repair of most types and sizes of sewer/drainage pipes.



MAX

MAX Series

PIPE MATERIAL	4"	5"	6"	8"	10"	12"	14"	15"	16"	18"
Clay										
Mission Clay	5.37	6.65	7.68	9.90	12.43	14.46		18.30		22.30
Building Products Clay	5.20		7.75	9.80	12.40	14.40		18.25		22.25
Eastern Standard Clay	5.23	6.31	7.44	9.84	11.99	14.36		18.20		21.93
Gladding/McBean Clay	5.36		7.82	9.99	12.47	14.52		18.03		21.47
Pacific Clay	5.36		7.93	9.93	12.88	15.30		18.60		22.40
Metal										
No Hub Cast Iron	4.38	5.30	6.30	8.38	10.56	12.50		15.83		
Service Weight Cast Iron	4.30	5.30	6.30	8.38	10.50	12.50		15.88		
Extra Heavy Cast Iron	4.50	5.50	6.50	8.62	10.75	12.75		15.88		
Ductile Iron	4.80		6.90	9.05	11.10	13.20	15.30		17.40	19.50
Steel	4.50	5.56	6.62	8.62	10.75	12.75	14.00		16.00	18.00
Copper	4.13	5.13	6.13	8.13	10.13					
Stainless Steel	4.00	5.00	6.00	8.00	10.00					
Duriron®	4.75		6.69	9.00	11.25	13.25		16.75		
Plastic										
Schedule 40 Plastic	4.50	5.56	6.62	8.62	10.75	12.75	14.00		16.00	18.00
Thinwall Plastic PVC (ASTM 3033) - SDR 26	4.21		6.27	8.16	10.20	12.24				
Thinwall Plastic PVC (ASTM 3034) - SDR 35	4.21		6.27	8.40	10.50	12.50		15.30		18.70
Thinwall Plastic ABS (ASTM 2751)	4.21	5.30	6.27	8.40	10.50	12.50				
Miscellaneous										
Armco Truss				9.40	11.80	14.10				
Bituminous Fiber/Orangeberg	Min. 4.64	Min. 5.82	Min. 6.92	Min. 9.14	Min. 11.24	Min. 13.44				
Asbestos Cement Class 1500 - Transite	4.81	5.90	6.92	9.02	11.12	13.22	15.30	16.34	17.38	
Concrete	Min. 5.50	Min. 6.50	Min. 7.50	Min. 10.00	Min. 12.45	Min. 14.50		Min. 19.60		Min. 22.50

U.S. Patent Nos. US 8,651,532 B2 & US 8,635,747 B2

Gripper Gasket LLC | 1660 Leeson Lane | Corona, CA 92879
(951) 479-4999

grippergasket.com

Page 2

REV. 11/22

