

Job Name:

Schedule Reference:

Date:

**GENERAL FEATURES**

- Dual set point functionality (*1)
- Compact floor-mount
- Two-speed settings
- Controls can be wall-mounted or unit-mounted in a hidden case
- IT Terminal Plug

OPTIONS

- ☐ External Heater Adapter..... PAC-YU25HT

Note: Mitsubishi Electric (MESCA) supports the use of only MESCA supplied and approved accessories for proper functioning of the unit(s). Use of non-MESCA supported accessories will affect warranty coverage.

Note:

Ventilation air to be introduced independent of indoor units.

Please refer to local codes for the required ventilation rates specific to the application.

*1 – All components of the system must be compatible. For more details on system compatibility, please refer to Technical Bulletin 100-151 available on our website.

Notes:

SPECIFICATIONS**Capacity***

Cooling8,000 Btu/h
Heating9,000 Btu/h

Power

Power Source 208 / 230V, 1 phase, 60Hz

Power Consumption

Cooling (208/230V).....0.051 / 0.061 kW
Heating (208/230V).....0.051 / 0.061 kW

Current

Cooling (208/230V).....0.25 / 0.27 A
Heating (208/230V).....0.25 / 0.27 A

Minimum Circuit Ampacity (MCA *) (208/230V) . . .0.32 / 0.34 A

Maximum Overcurrent Protection (MOCP)15 A

*** All electrical work shall comply with National (CEC) and local codes and regulations.**

External FinishAcrylic paint (5Y 8/1)

Dimensions

Inches 24-13/16 h x 41-11/32 w x 8-11/16 d
mm 630 h x 1050 w x 220 d

Net Weight51 lb / 23 kg

Fan

Type x QuantitySirocco fan x 1
Airflow Rate (Low - High) 194 - 229 CFM
Motor

Type..... Single phase induction motor

External Static Pressure

..... 0" WG

Air FilterStandard

Refrigerant Pipe Dimensions (R410A)

Liquid1/4" / 6.35 mm flare
Gas1/2" / 12.7 mm flare

Drainpipe DimensionO.D. 1-3/32" / 27 mm



Sound Level (Low - High)36 - 41 dB (A)

* Cooling / Heating capacity indicated at the maximum value at operation under the following conditions:

Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB, Outdoor 95° F (35° C) DB
Heating | Indoor: 70° F (21° C) DB, Outdoor 47° F (8° C) DB / 43° F (6° C) WB

Model: PFFY-P08NEMU-E – DIMENSIONS

Unit : mm(in)

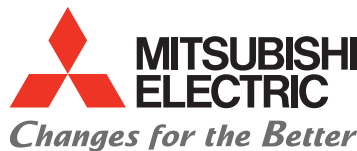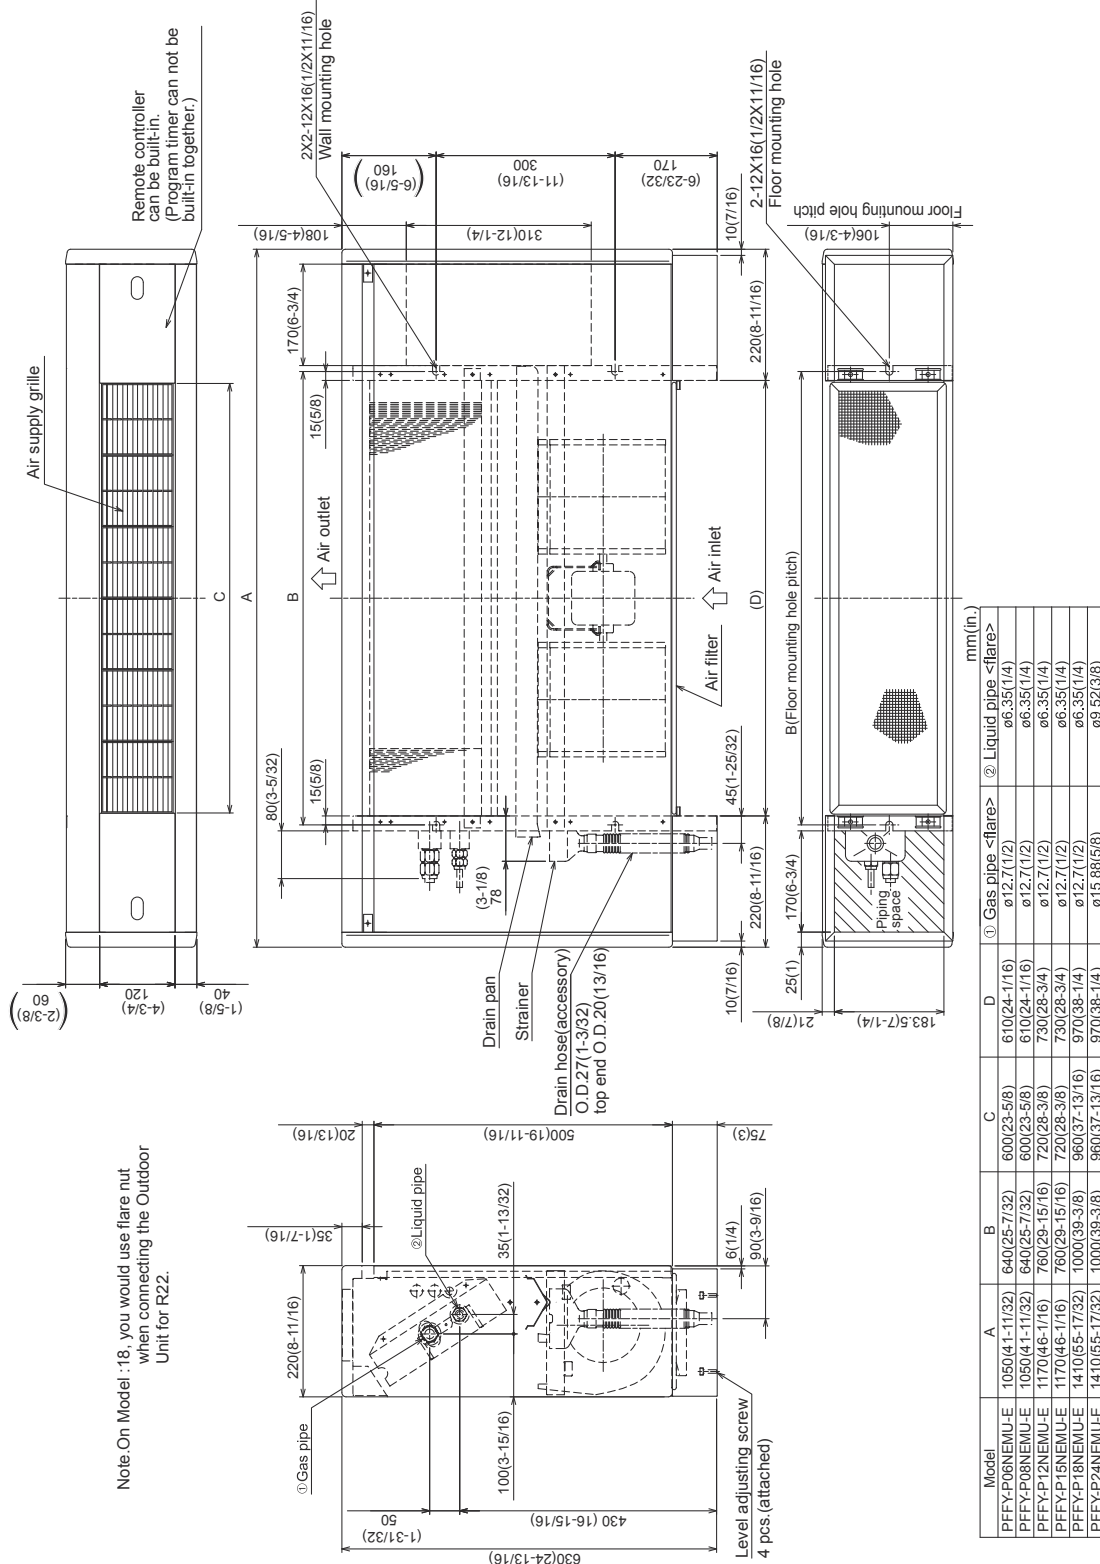

for a greener tomorrow

