

Job Name:

Schedule Reference:

Date:

**GENERAL FEATURES**

- Dual set point functionality (*1)
- Compact floor-mount
- Two-speed settings
- Controls can be wall-mounted or unit-mounted in a hidden case
- IT Terminal Plug

OPTIONS

- ☐ External Heater Adapter..... PAC-YU25HT

Note:

Ventilation air to be introduced independent of indoor units.

Please refer to local codes for the required ventilation rates specific to the application.

*1 – All components of the system must be compatible. For more details on system compatibility, please refer to Technical Bulletin 100-151 available on our website.

SPECIFICATIONS**Capacity***

Cooling	15,000 Btu/h
Heating	17,000 Btu/h

Power

Power Source 208 / 230V, 1 phase, 60Hz

Power Consumption

Cooling (208/230V)..... 0.065 / 0.078 kW

Heating (208/230V)..... 0.065 / 0.078 kW

Current

Cooling (208/230V)..... 0.32 / 0.35A

Heating (208/230V)..... 0.32 / 0.35A

Minimum Circuit Ampacity (MCA) (208/230V).... 0.40 / 0.44A

Maximum Overcurrent Protection (MOCP) 15 A

External Finish Galvanized sheet metal

Dimensions

Inches 25-3/16 h x 39-5/8 w x 8-11/16 d

mm 639 h x 1006 w x 220 d

Net Weight 47 lb / 21 kg

Fan

Type x Quantity Sirocco fan x 2

Airflow Rate (Low - High) 300 - 388 CFM

Motor Type Single phase induction motor

External Static Pressure..... 0"WG

Air Filter Standard

Refrigerant Pipe Dimensions (R410A)

Liquid 1/4" / 6.35mm flare

Gas 1/2" / 12.7 mm flare

Drainpipe Dimension O.D. 1-3/32" / 27 mm

Sound Level (Low - High) 38 - 43 dB (A)

* Cooling / Heating capacity indicated at the maximum value at operation under the following conditions:


Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB, Outdoor 95° F (35° C) DB

Heating | Indoor: 70° F (21° C) DB, Outdoor 47° F (8° C) DB / 43° F (6° C) WB

Notes:


Model: PFFY-P15NRMU-E – DIMENSIONS

Unit : mm(in)

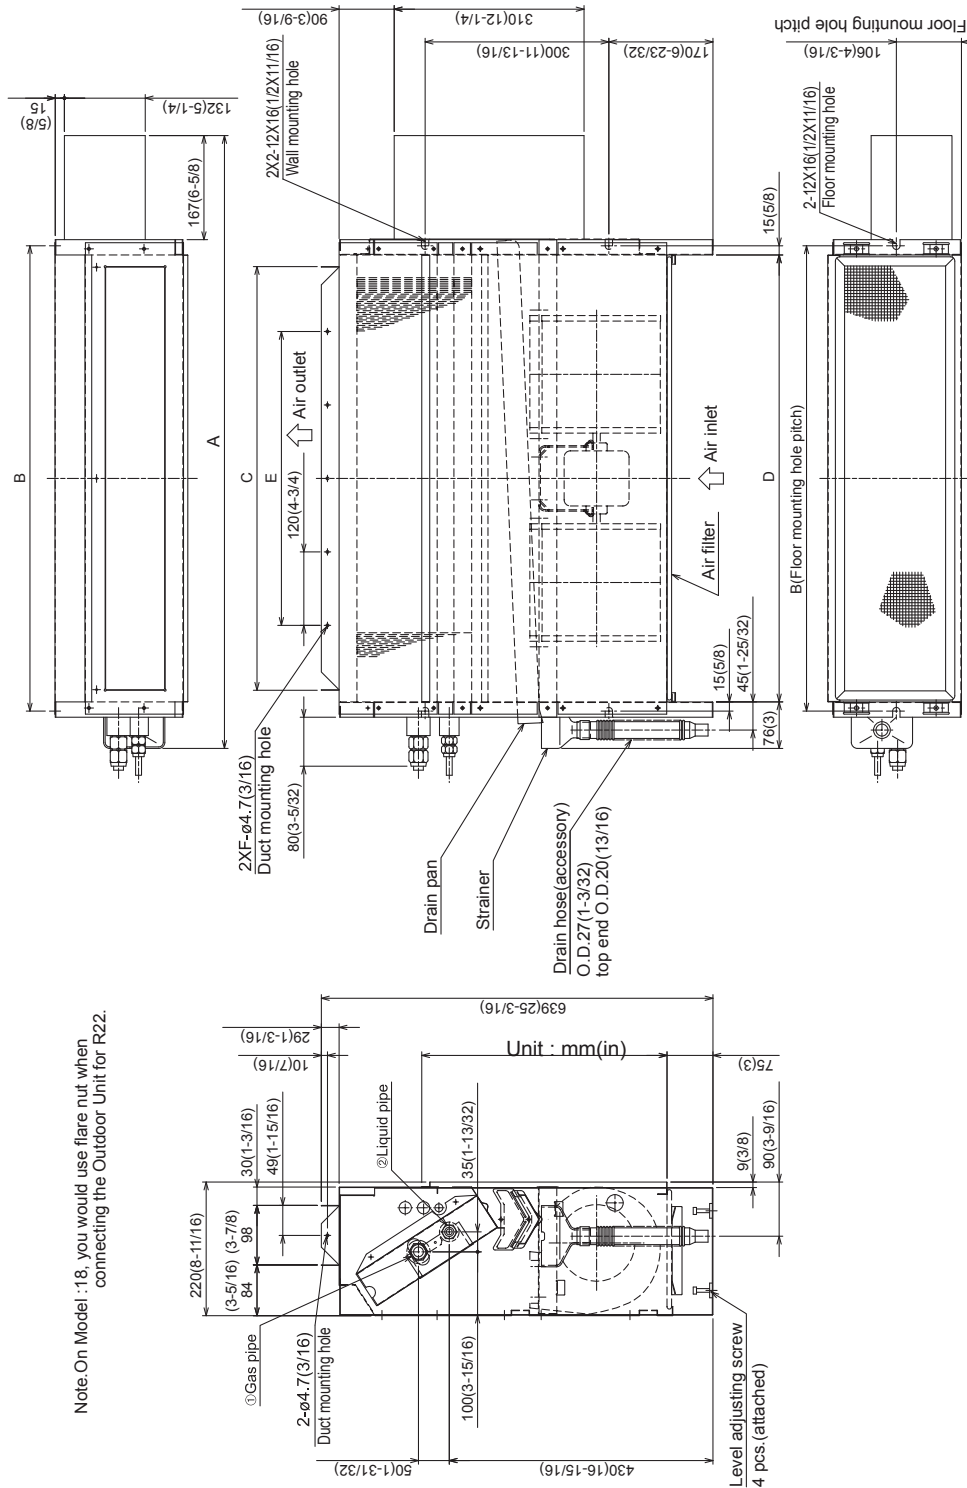

Note: On Model :18, you would use flare nut when connecting the Outdoor Unit for R22.

Model	A	B	C	D	E	F	① Gas pipe <flare>	② Liquid pipe <flare>
PFFY-P06NRMU-E	886(34-15/16)	640(25-7/32)	572(22-9/16)	610(24-1/16)	360(14-3/16)	4	ø12.7(1/2)	ø6.35(1/4)
PFFY-P08NRMU-E	886(34-15/16)	640(25-7/32)	572(22-9/16)	610(24-1/16)	360(14-3/16)	4	ø12.7(1/2)	ø6.35(1/4)
PFFY-P12NRMU-E	1006(39-5/8)	760(29-15/16)	692(27-1/4)	730(28-3/4)	480(18-15/16)	5	ø12.7(1/2)	ø6.35(1/4)
PFFY-P15NRMU-E	1006(39-5/8)	760(29-15/16)	692(27-1/4)	730(28-3/4)	480(18-15/16)	5	ø12.7(1/2)	ø6.35(1/4)
PFFY-P16NRMU-E	1246(49-1/16)	1000(39-3/8)	932(36-3/4)	970(38-1/4)	720(28-3/8)	7	ø12.7(1/2)	ø6.35(1/4)
PFFY-P24NRMU-E	1246(49-1/16)	1000(39-3/8)	932(36-3/4)	970(38-1/4)	720(28-3/8)	7	ø15.88(5/8)	ø9.52(3/8)

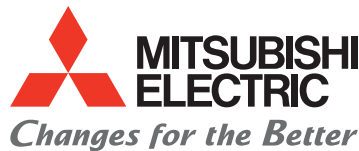

for a greener tomorrow

